
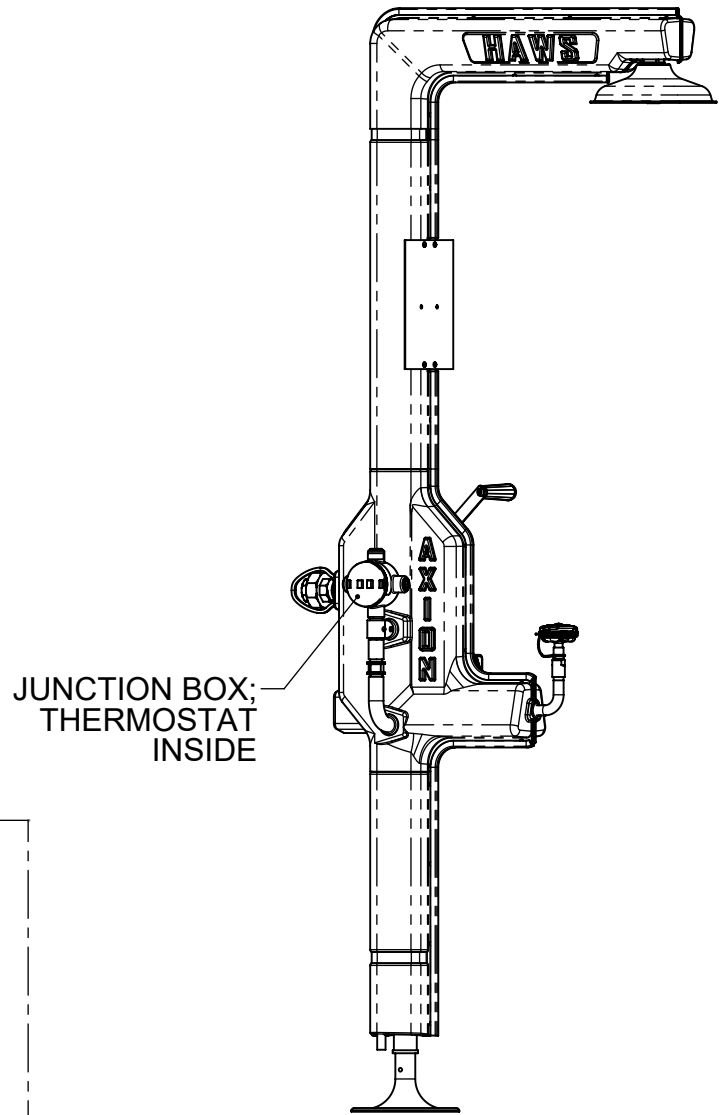


NOTES:

1. MODEL SP156 IS A HERMETICALLY-SEALED THERMOSTAT.
 - OPENS (RISING) AT 52°F (11.1°C).
 - CLOSSES (FALLING) AT 42°F (5.6°C).

REPLACEMENT INSTRUCTIONS:

1. REMOVE JUNCTION BOX ACCESS COVER.
2. DISCONNECT THERMOSTAT LEADS FROM TERMINAL BLOCK AND WIRE NUT.
3. UNTHREAD THERMOSTAT FROM MOUNTING PAD LOCATED INSIDE JUNCTION BOX.
4. THREAD NEW THERMOSTAT ONTO MOUNTING PAD.
5. CONNECT THERMOSTAT LEADS TO TERMINAL BLOCK AND WIRE NUT (SEE WIRING DIAGRAM).
6. REPLACE ACCESS COVER

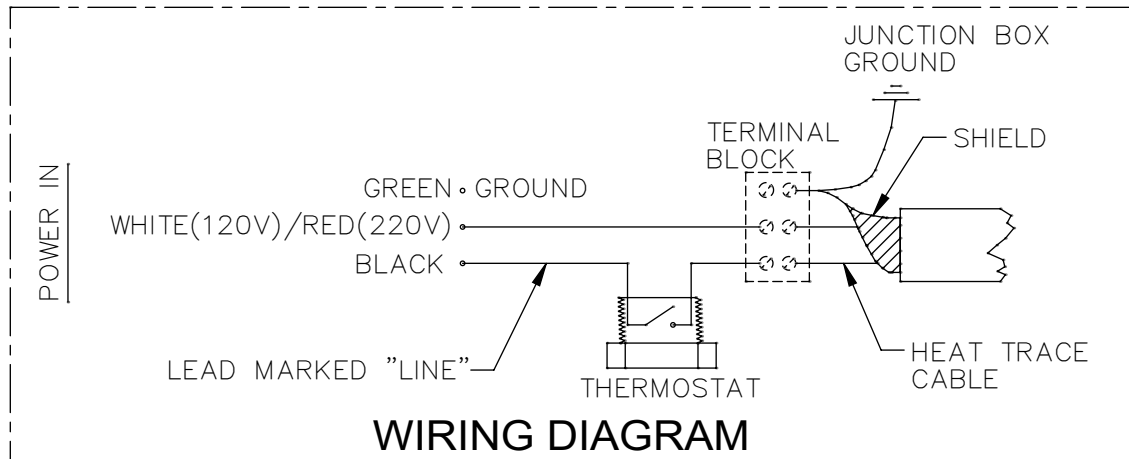

**8315CTFP SHOWER
(SOLD SEPARATELY)**

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM			
		ECN: 5578 DRAWN:	REV. ECN: 5578 DATE:	BY: JL CHK'D:	MODEL(S) SP156 - THERMOSTAT
APPROVED: BJM	DATE: 09/18/20	SCALE: N/A	DRAWING TYPE: INSTALLATION	SIZE: A	SHEET 1 OF 1