THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

NOTES:

1. TO COMPLY WITH ANSI Z358.1-2009 FOR EMERGENCY EYEWASH OR EYE/FACE WASH:
   - UNIT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS AND ACCEPTABLE PLUMBING PRACTICES.
   - EYEWASH OR EYE/FACE WASH SHALL BE POSITIONED WITH NOZZLES NOT LESS THEN 83.8 CM (33 IN.) AND NO GREATER THAN 114.3 CM (45 IN.) FROM SURFACE ON WHICH USER STANDS AND 15.3 CM (6 IN.) MINIMUM FROM WALL OR NEAREST OBSTRUCTION.
2. DIMENSIONS MAY VARY BY ± 1/2 [13].
3. USE SUPPLIED SCREWS TO INSTALL THE UNIT ON WALL STRUCTURE.
4. FLOW RATE FOR EYE/FACE WASH IS 5 GPM AND EXCEEDS ANSI Z358.1-2009 STANDARD.

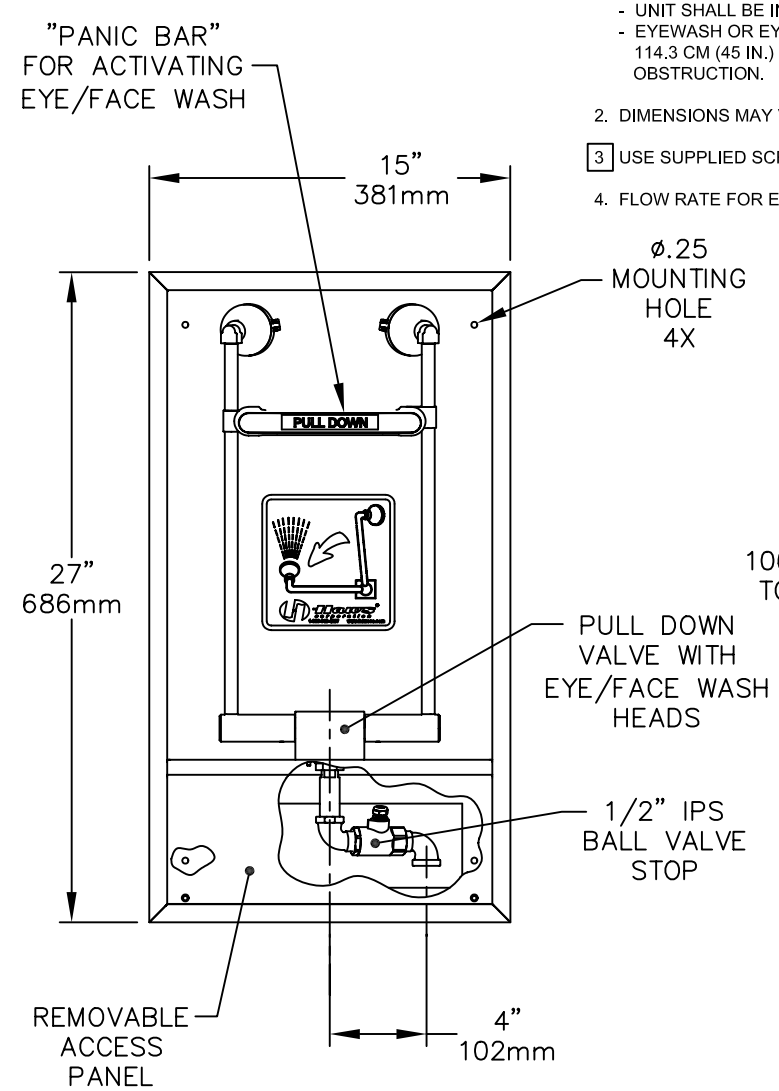

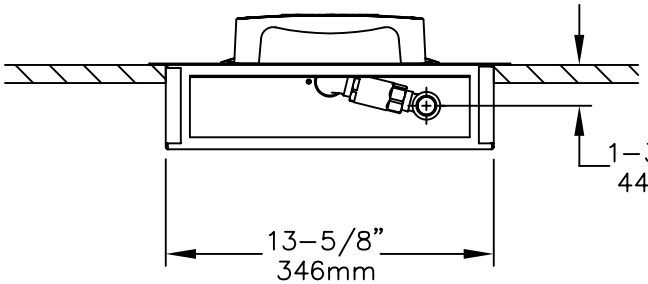

3 MOUNTING HARDWARE SCREW, 14 X 1-1/4" 4X (SUPPLIED)

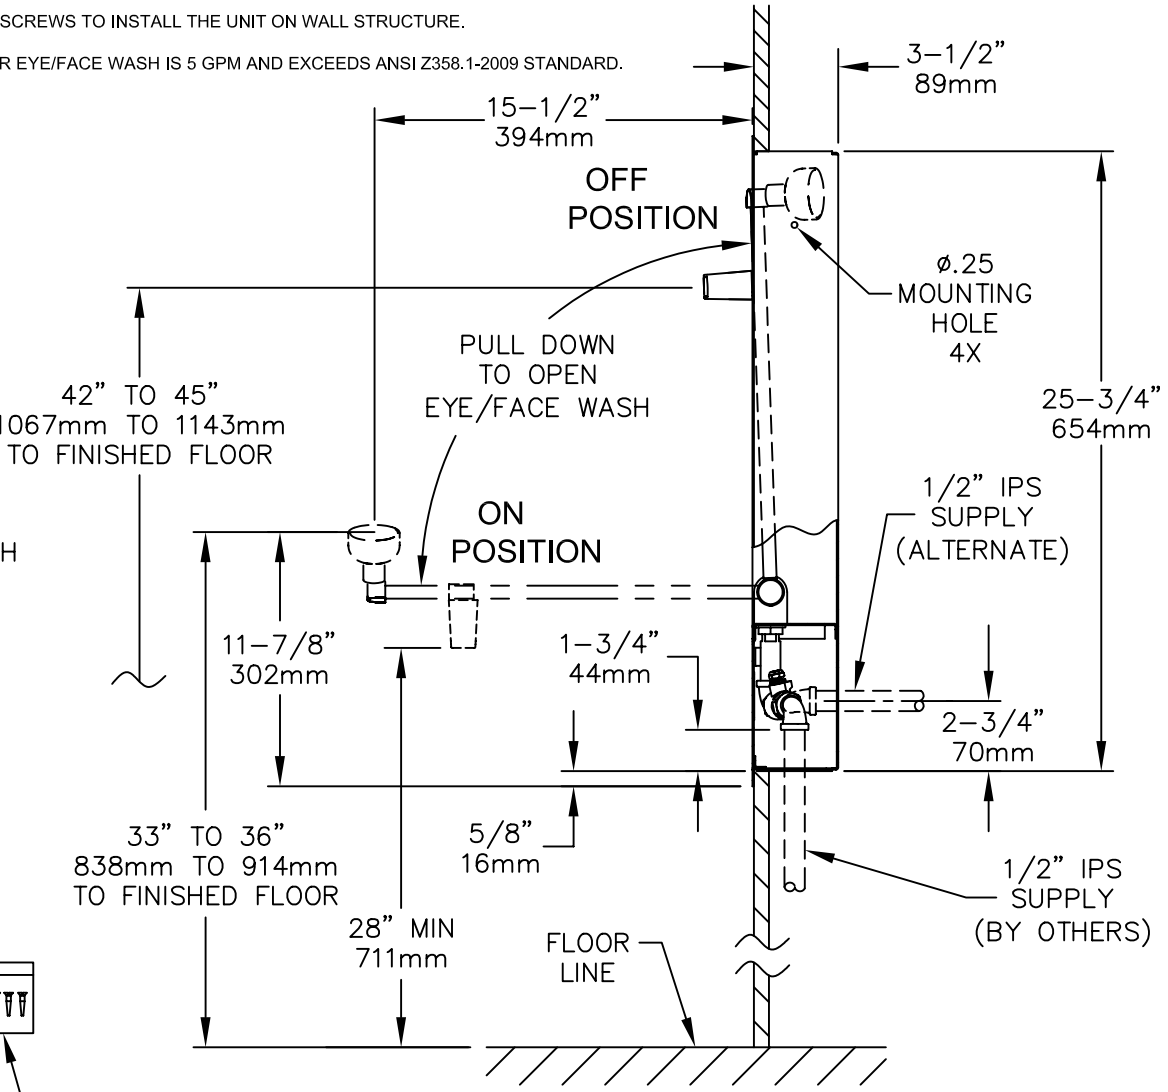

DWG NO.: 10907A00

Haws corporation
1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO.	REVISED PER	BY
.	ECN: 4367	IR
DRAWN: RTM	DATE: 05/29/03	CHK'D.:
APPROVED:	DATE:	

MODEL(S): RECESSED WALL MTD EYE/FACE WASH
7655WC
INFO FAX DOC #: 2765592
SCALE: 1:8 DRAWING TYPE: INSTALLATION/FAXBACK

PART NUMBER: 0002080077.D
DRAWING NUMBER: 10907A00 REV. 7
SIZE: A SHEET 1 OF 1

©2009 Haws Corporation - All Rights Reserved HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.