THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

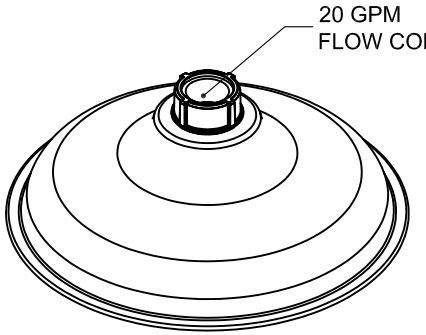

SHOWER HEAD
(SHROUD TYPE WITH INTEGRAL FLOW CONTROL)
STYLE A

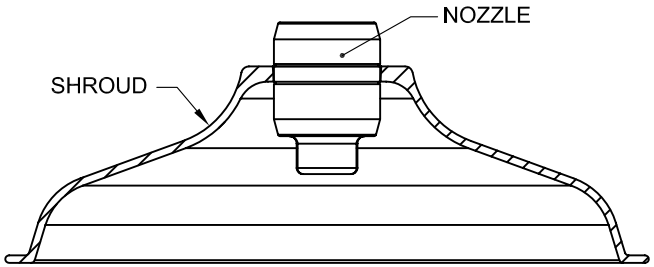

SP829 SHOWER HEAD
NOZZLE TYPE WITH EXTERNAL FLOW CONTROL
(MAY OR MAY NOT INCLUDE SHROUD)
STYLE B

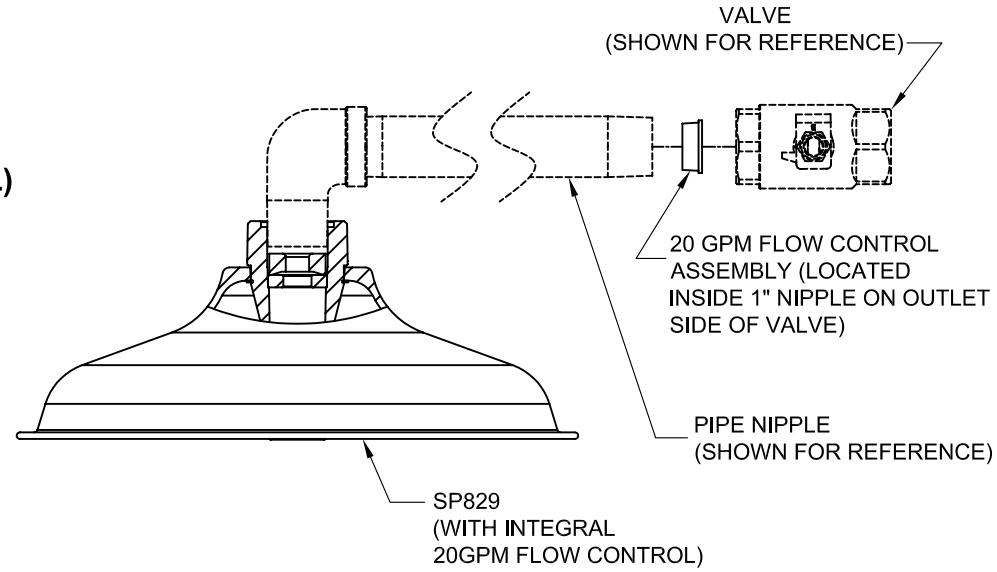

FLOW CONTROL REMOVAL
DETAIL A

DWG. NO. 15351A00

NOTES:

1. IF NECESSARY, USE DOW CORNING 832 SEALANT, PLACING 5 SMALL BEADS ON THE MALE THREADS OF MATING PART (JUST ABOVE THE FIRST THREAD) BEFORE ASSEMBLING HEAD.

2. SHOWER HEAD REPLACEMENT INSTRUCTIONS:
   STYLE A) IF EXISTING HEAD IS SHROUD TYPE WITH INTERNAL FLOW CONTROL; REPLACE WITH NEW SP829 HEAD. NO OTHER MODIFICATIONS ARE REQUIRED.

   STYLE B) IF EXISTING HEAD IS NOZZLE TYPE (MAY OR MAY NOT HAVE A SHROUD ATTACHED) A 20 GPM FLOW CONTROL IS PRESENT INSIDE NIPPLE AND MUST BE REMOVED PRIOR TO INSTALLING NEW SHOWER HEAD.
   (SEE DETAIL A)

Haws corporation
1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO.	REVISED PER	BY:	MODEL(S):	PART NUMBER:
4111	ECN: 4230	IR	SP829 AXION SHOWER HEAD	0002080268
DRAWN: IR	DATE: 5/22/08	CHK'D.:	INFO FAX DOC #: 277829	DRAWING NUMBER: 15351A00 REV: 6
APPROVED:	DATE:		SCALE: 3/2 DRAWING TYPE: INSTALLATION/FAXBACK	SIZE: A SHEET 1 OF 1

©2009 Haws Corporation - All Rights Reserved HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.