


EYEWASH  
(NOT SUPPLIED)



8"  
203mm  
MINIMUM CLEARANCE  
ABOVE UNIT

4X  
3/16"  
4.8mm  
MOUNTING  
HOLES

TEMPERATURE  
GAUGE

HOT  
SHUTOFF  
VALVE

HOT  
OUTLET COLD  
INLET

UNIT MUST BE INSTALLED  
IN THE VERTICAL POSITION  
OR PERMANENT DAMAGE TO  
THE HEATER WILL RESULT

10-1/2"  
267mm

PRESSURE  
BYPASS  
VALVE

50 MICRON  
FILTER

POWER IN  
(NOT SUPPLIED)


HEATER  
480VAC  
3 PHASE  
20kW

(CAUTION: THIS  
UNIT IS  
INTENDED  
FOR INDOOR  
USE  
ONLY)

1/2" IPS  
DIELECTRIC  
UNION  
(INLET & OUTLET)

NOTES:

1. CAUTION: THIS UNIT IS INTENDED "FOR INDOOR USE ONLY"
2. DIMENSIONS MAY VARY BY:  $\pm 1/2"$  [12.7mm].

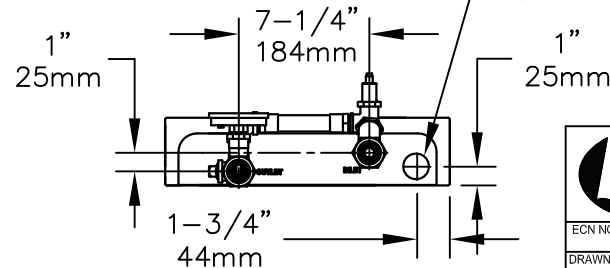

1455 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (775) 359-7424  
E-MAIL: HAWS@HAWSCO.COM  
WEBSITE: WWW.HAWSCO.COM

ECN NO.:	REVISED PER:	BY:	MODEL(S)	PART NUMBER
	ECN: 4676	SLS	TWBS.EW.H	0002080380.D
DRAWN:	DATE:	CHKD.:		DRAWING NO.
RTM	04/30/04			12681A00
APPROVED:	DATE:			REV
				7
SCALE: 1:10			DRAWING TYPE: INSTALLATION	SIZE: A SHEET 1 OF 1