



INSTALLATION, OPERATION & MAINTENANCE INSTRUCTIONS

1455 Kleppe Lane ♦ Sparks, NV 89431-6467 ♦ (775) 359-4712 ♦ Fax (775) 359-7424
E-mail: haws@hawsco.com ♦ website: www.hawsco.com

No.2077036 (8)

Model 3060FR/3060.6280/3060.6519FR Drinking Fountain

NOTE TO INSTALLER: Please leave this information with the Maintenance Department.

LIMITED WARRANTY

HAWS® warrants that all of its products are guaranteed against defective material or poor workmanship for a period of **one year from date of shipment**. HAWS liability under this warranty shall be discharged by furnishing without charge F.O.B. HAWS Factory any goods, or part thereof, which shall appear to the Company upon inspection to be of defective material or not of first class workmanship, provided that claim is made in writing to company within a reasonable period after receipt of the product. Where claims for defects are made, the defective part or parts shall be delivered to the Company, prepaid, for inspection. HAWS will not be liable for the cost of repairs, alterations or replacements, or for any expense connected therewith made by the owner or his agents, except upon written authority from HAWS, Sparks, Nevada. HAWS will not be liable for any damages caused by defective materials or poor workmanship, except for replacements, as provided above. Buyer agrees that Haws has made no other warranties either expressed or implied in addition to those above stated, except that of title with respect to any of the products or equipment sold hereunder and that HAWS shall not be liable for general, special, or consequential damages claimed to arise under the contract of sale. The drinking fountain manufactured by HAWS is warranted to function if installation and maintenance instructions provided are adhered to. The units also must be used for the purpose for which they were intended.

NO OTHER WARRANTIES EXPRESSED OR IMPLIED ARE AUTHORIZED, PROVIDED OR GIVEN BY HAWS.

SHOULD YOU EXPERIENCE DIFFICULTY WITH THE INSTALLATION OF THIS MODEL PLEASE CALL:

TECHNICAL SUPPORT: 1-800-766-5612

FOR CUSTOMER SERVICE: 1-888-640-4297

RECOMMENDED TOOLS: Hack saw, pipe joint sealant, screwdriver, level, 12" adjustable wrench, 10" pipe wrench, 5/64" hex key wrench, 9/16", 1/2", 7/16" socket wrench or open end wrench.

LOCATION OF UNIT: When installing Model 3060FR Drinking Fountain, local, state or federal codes should be adhered to. If height other than shown is required, then dimensions must be adjusted accordingly.

SUPPLY LINE: The minimum recommended line size is 1/2"IPS. Flowing pressure is 30-90 psi (2-6 ATM) for Models 3060FR and 3060.6280FR. Flowing pressure for Model 3060.6519FR is 45-90 psi (3-6 ATM). Where sediment or mineral content is a problem, an inlet filter is recommended.

PLUMBING CONNECTIONS: Waste outlet is 1-1/4" O.D. tailpiece.

MAINTENANCE: Refer to 6518FR Valve Operation and Maintenance Sheet for more information.

TROUBLESHOOTING 3060FR

PROBLEM	REPAIR CHECKLIST
1. Insufficient bubbler flow.	1a. Check that inlet screwdriver stop valve is wide open. (Customer supplied). Turn counterclockwise. b. Verify minimum 30 psi flowing supply pressure. c. Adjust valve to increase flow. See 6518FR Valve Manual.

TROUBLESHOOTING 3060.6280FR

PROBLEM	REPAIR CHECKLIST
1. Insufficient bubbler flow.	1a. Check that inlet screwdriver stop valve is wide open. (Customer supplied). Turn counterclockwise. b. Verify minimum 30 psi flowing supply pressure. c. Adjust valve to increase flow. See 6518.2FR Valve Manual.

TROUBLESHOOTING 3060.6519FR

PROBLEM	REPAIR CHECKLIST
1. Insufficient bubbler flow.	1a. Check that inlet screwdriver stop valve is wide open. (Customer supplied). Turn counterclockwise. b. Verify minimum 45 psi flowing supply pressure. c. Adjust valve to increase flow. See 6519FR Valve Manual.


General Notes:

Before tightening nut and ferrule assembly, push tubing into fitting until it bottoms out to ensure correct engagement with O-Ring.

For more information about Haws products, see our website: www.hawSCO.com

PARTS BREAKDOWN

ITEM	DESCRIPTION
1	VALVE 6518FR
2	ACCESS PANEL PAB3000
3	STRAINER ASSY 6461
4	BUBBLER HEAD 5701SL
5	PUSH BUTTON ASSY 5881PBA
6	ACCESS PLATE PA3177
7	6519FR (OPTIONAL)
8	VALVE 6518.2FR (OPTIONAL)
9	6280FR JUG FILLER KIT F/R
10	HAWS 6625 VALVE BOX (OPTIONAL)

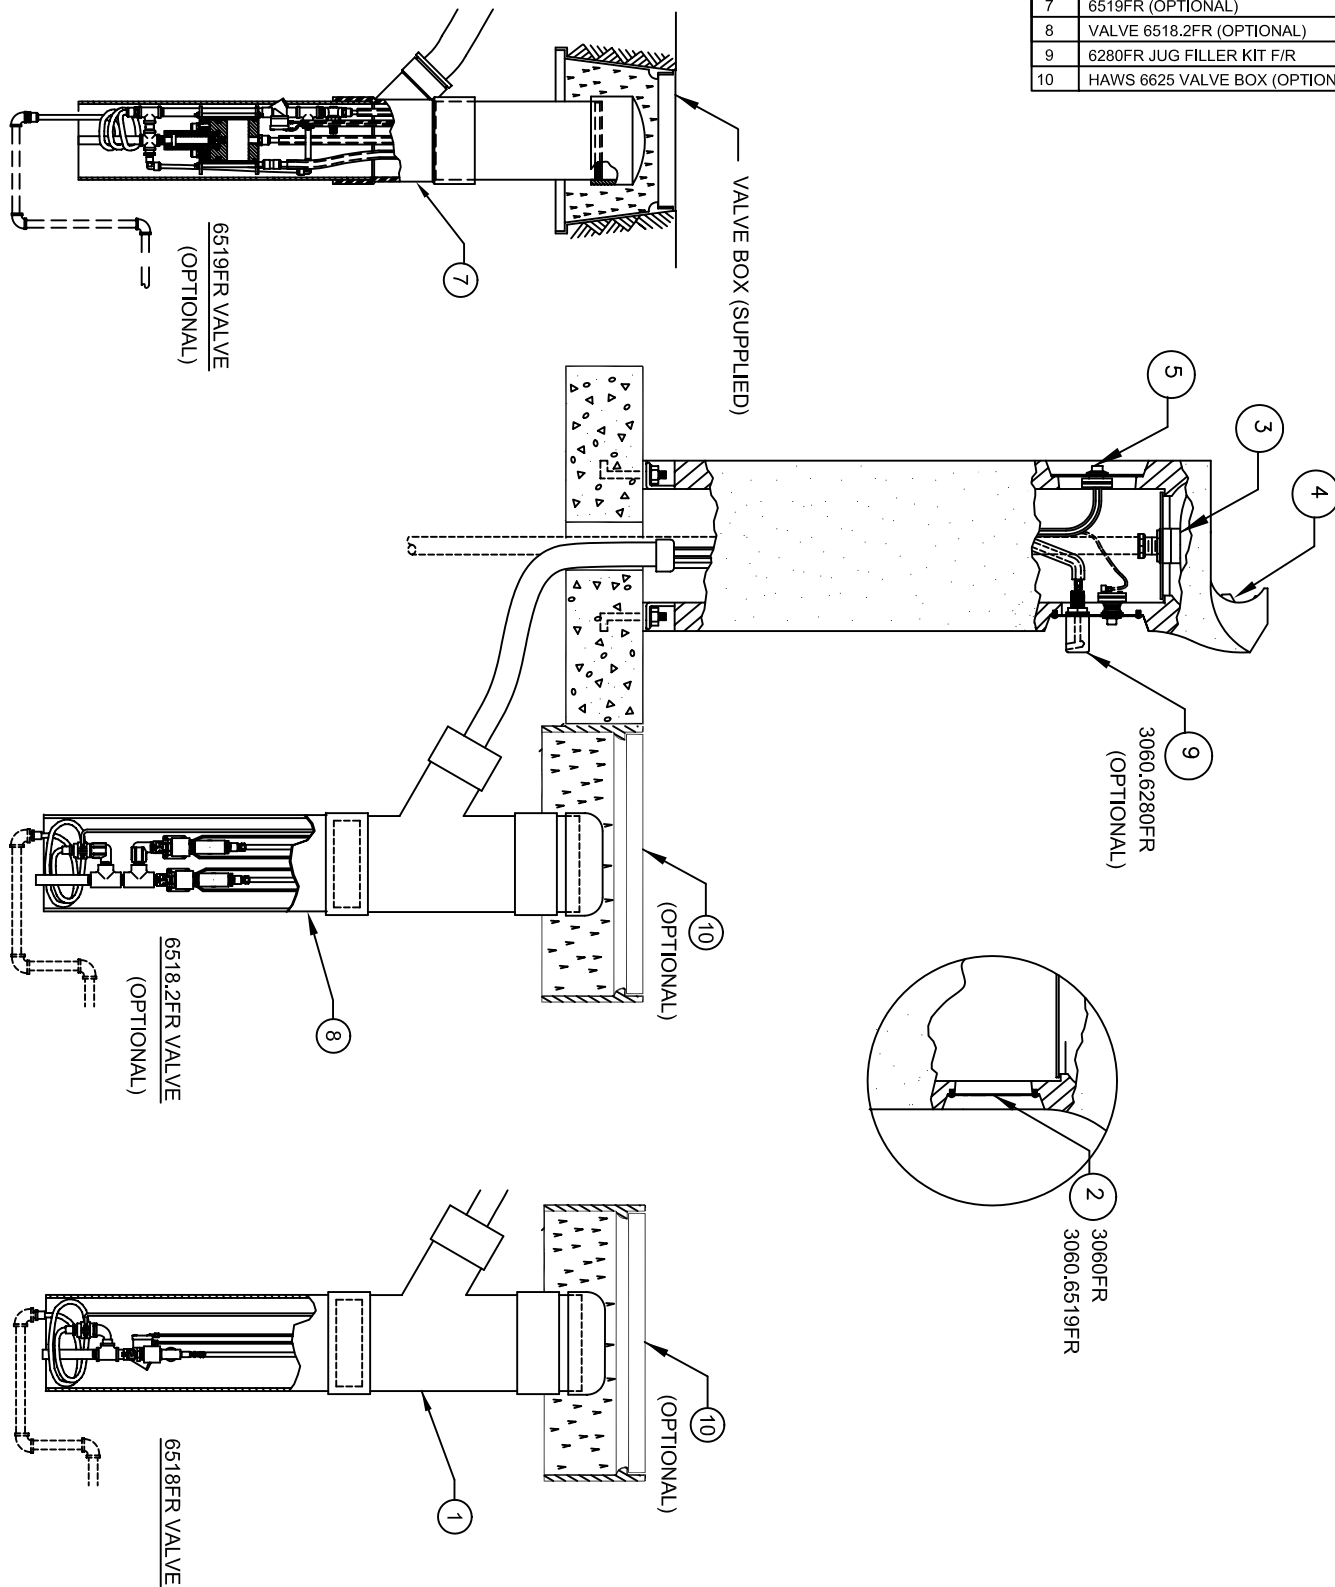


WHEN ORDERING PARTS PLEASE SPECIFY YOUR MODEL NUMBER



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

DRAWN BY: D. OLLOM	DATE: 11/25/95	CHECK BY:	APPVD BY:	SCALE: 1:8
TITLE: 3060FR/3060.6280FR/3060.6519FR			PART NUMBER: 0002077036	
DRAWING TYPE: PARTS BREAKDOWN			DRAWING NUMBER: 12805C00	REV: 8

REV	DESCRIPTION	ECN	DATE	BY/APVD
8	UPDATED PER ECN	4177	12/03/09	HM
REVISIONS				

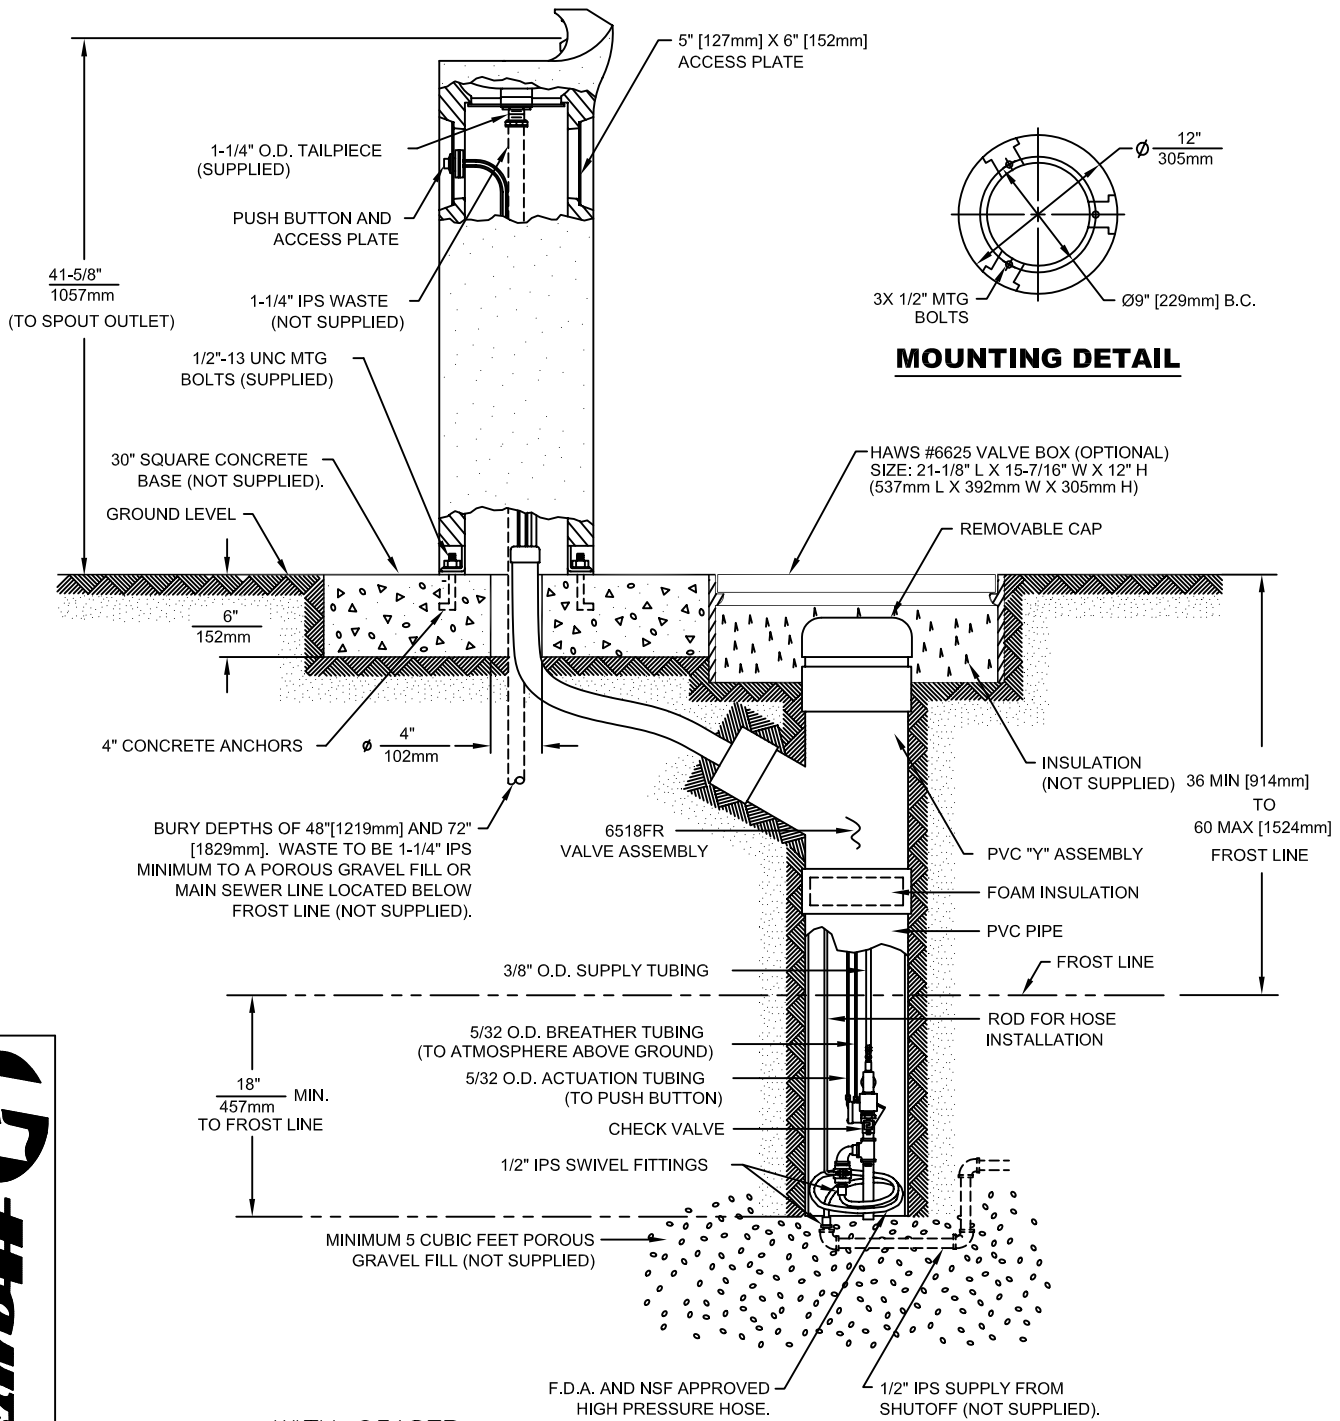

WITH 6518FR VALVE ASSEMBLY
SEE SHEET 4 OF 4 FOR DETAILS

- NOTE:**
1. SEE MODEL 3060.6280FR (SHT. 2 OF 4) FOR UNIT CONFIGURED WITH 6280FR JUG FILLER KIT.
 2. SEE MODEL 3060.6519FR (SHT. 3 OF 4) FOR UNIT CONFIGURED WITH 6519FR FREEZE VALVE.

Haws Corporation	
EGN NO. 12859788 ECN: 4177 HHL DATE: 12/92 APPROVER:	MODEL(S): 3060FR/3060.6280FR/3060.6519FR INFO FAX DOC #: 2306037/23090628/23090937
SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCC.COM WEBSITE: WWW.HAWSCC.COM	1455 KLEPPE LANE 000207036 D 07634000 8

HAWS #6625 VALVE BOX (OPTIONAL)
 SIZE: 21-1/8" L x 15-7/16" W x 12" H
 (537mm L x 392mm W x 305mm H)



(TO PUSH BUTTON)



1455 KLEPPE LANE
 SPARKS, NEVADA 89431
 (775) 359-4712 FAX (775) 359-7424
 E-MAIL: HAWS@HAWSCCO.COM
 WEBSITE: WWW.HAWSCCO.COM

EQN NO.	REVISED BY	DATE	CHKD BY	DATE	MODEL(S)	EQN NO.	REVISED BY	DATE
3060FR/3060	4177	02/09/06			3060FR/3060 6280FR/3060 6519FR	00020170361D		
ISSUED BY	DATE	ISSUED BY	DATE	ISSUED BY	DATE	ISSUED BY	DATE	ISSUED BY
INFO FAX DOC #:	2306037/230606229/23060937							
SIZE:	A	SHEET:	2	OF:	4			