

## FEATURES & BENEFITS

### HAWS ORIGINAL

Designed and assembled with domestic and foreign parts in the US by Haws.

### BYPASS

Best-in-class cold water bypass flow (65% of rated tempered water flow) means continued protection under adverse conditions.

### POSITIVE SHUT OFF

Actively suspends hot water flow when cold water supply is lost to protect against scalding.

### PRESSURE DROP

Lowest internal pressure drop for this valve class – essential where supply pressure is low.

### TEMPERATURE MANAGEMENT

Paraffin-based thermal actuation technology keeps outlet temperature within tight specifications to prevent scalding and hypothermia.

### SHUTTLE DESIGN

Superior shuttle design combined with premium material selection eliminates valve binding and reduces maintenance costs.

### MIXING CHAMBER

Innovative funnel design generates turbulent flow to ensure consistent temperature blending across entire flow range.

### DEPOSITS RESISTANT

Lime and calcium resistant materials used throughout prevent valve sticking and provide a long service life.

### FLOW RATES

Flow range of 1 to 31 GPM (117.3 L) provides service for one emergency combination shower or multiple eyewashes, reducing complexity and hardware costs.

### MEDICALLY SUPERIOR RESPONSE

AXION's superior design and technology provide a complete safety solution for increased victim comfort.

### EXTENDED WARRANTY

3-year extended warranty based on superior engineering and best-in-class material selection means reliable protection you can trust for the long term.



## SPECIFICATIONS

### Model 9201E - Thermostatic Mixing Valve (patent pending)

	MAXIMUM		MINIMUM	
Flow Rate	31 GPM	117 LPM	1 GPM	4 LPM
Hot Inlet Temperature	180° F	82° C	120° F	49° C
Recommended Hot Inlet Temperature	140° F	60° C		
Cold Inlet Temperature	70° F	21° C	40° F	4° C
Adjustable Outlet Temperature Range	90° F	32° C	60° F	16° C
Operating Pressure	125 PSI	8.6 BAR		
Factory Temperature Set Point	85° F	29° C		
Cold Water Bypass	20 GPM	76 LPM @ 30 PSID		




Inlet Ports: 1-1/4" NPT(f) Outlet Port: 1-1/4" NPT(F)

Maximum Inlet Pressure Differential: +/- 10%

Listings: CSA certified per ASSE 1071, ANSI Z358.1, and applicable sections of CSA B125.3.

## FLOW CAPACITIES

MODEL	INLET	OUTLET	MINIMUM FLOW	INTERNAL COLD WATER BY-PASS AT 30PSI DROP	PRESSURE DROP									
					5	10	15	20	30	45	60	PSI		
9201E	1-1/4"	1-1/4"	1	20	.345	.689	1	1.38	2.07	3.10	4.13	BAR		
					13	18	22	25	31	38	44	GPM		
					4	76	48	68	83	96	117	144	166	L/MIN

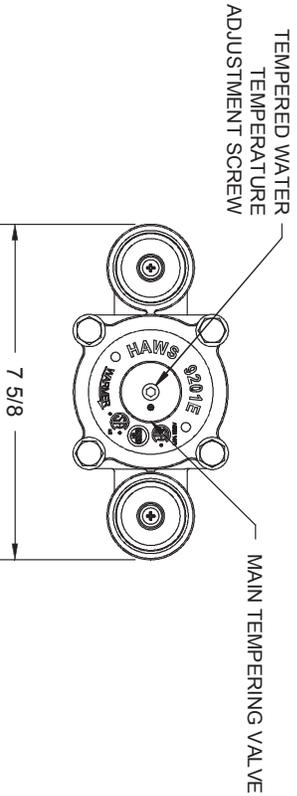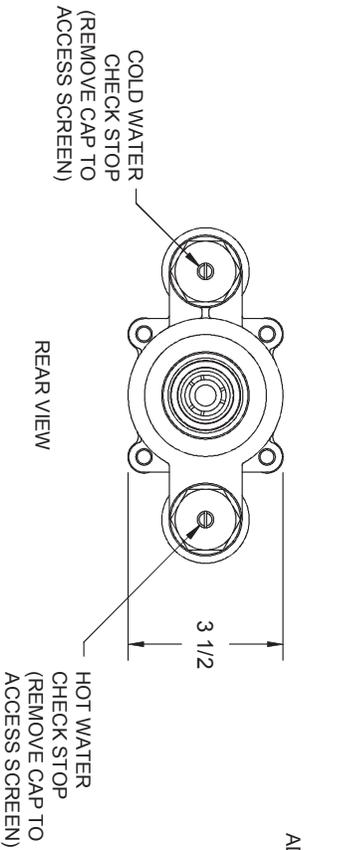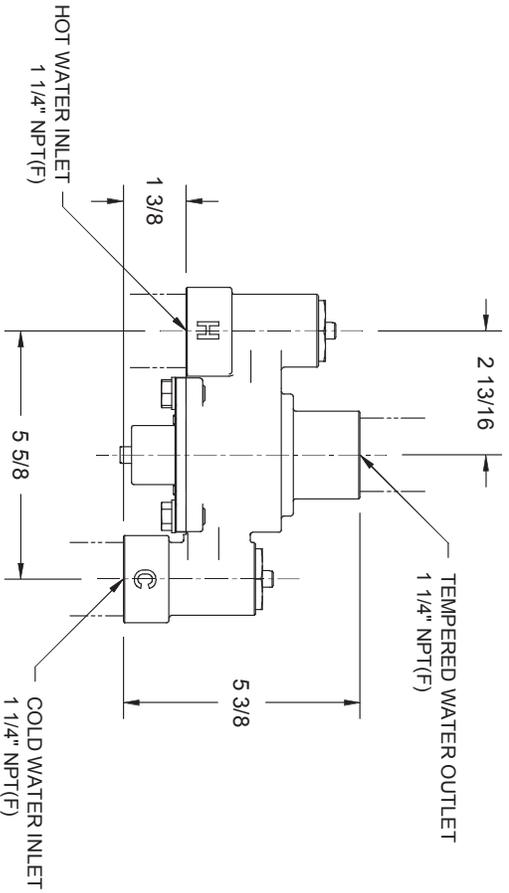

		<b>9201E</b>	
ECONOMY REVISION PERIOD BY		MODEL(S)	
4395	ECN-4872	9201E	
DATE	CHK'D	INSTALLATION	
9/7/10		SIZE A SHEET 1 OF 1	
APPROVED:	DATE:	SCALE: 1:4 DRAWING TYPE:	
		PART NUMBER	
		0002080233 D	
		DRAWING NO. REV	
		18052A 5	
1455 KLEPPE LANE		SPARKS, NEVADA 89431	
(775) 359-4712 FAX (755) 359-7424		E-MAIL: HAWS@HAWS.CO.COM	
WEBSITE: WWW.HAWS.CO.COM			