

FEATURES & BENEFITS

HAWS ORIGINAL

Designed and assembled with domestic and foreign parts in the US by Haws.

BYPASS

Best-in-class cold water bypass flow (65% of rated tempered water flow) means continued protection under adverse conditions.

POSITIVE SHUT OFF

Actively suspends hot water flow when cold water supply is lost to protect against scalding.

PRESSURE DROP

Lowest internal pressure drop for this valve class – essential where supply pressure is low.

TEMPERATURE MANAGEMENT

Paraffin-based thermal actuation technology keeps outlet temperature within tight specifications to prevent scalding and hypothermia.

SHUTTLE DESIGN

Superior shuttle design combined with premium material selection eliminates valve binding and reduces maintenance costs.

Lead Free

Certified to meet NSF/ANSI/CAN 372.

MIXING CHAMBER

Innovative funnel design generates turbulent flow to ensure consistent temperature blending across entire flow range.

DEPOSITS RESISTANT

Lime and calcium resistant materials used throughout prevent valve sticking and provide a long service life.

FLOW RATES

Flow range of 1 to 10 GPM (37.9 L) provides service for one emergency eye/face wash.

EXTENDED WARRANTY

3-year extended warranty based on superior engineering and best-in-class material selection means reliable protection you can trust for the long term.



SPECIFICATIONS

Model 9201EW - Thermostatic Mixing Valve (patent pending)

	MAXIMUM		MINIMUM	
Flow Rate	10 GPM	37.9 LPM	1 GPM	4 LPM
Hot Inlet Temperature	180° F	82° C	120° F	49° C
Recommended Hot Inlet Temperature	140° F	60° C		
Cold Inlet Temperature	65° F	18.3° C	40° F	4° C
Adjustable Outlet Temperature Range	90° F	32° C	60° F	16° C
Operating Pressure	125 PSI	8.6 BAR		
Factory Temperature Set Point	85° F	29° C		
Cold Water Bypass	3.8 GPM	14.4 LPM @ 30 PSID		

Inlet Ports: 1/2" NPT(F) Outlet Port: 1/2" NPT(F)

Maximum Inlet Pressure Differential: +/- 10%



Listings: CSA certified per ASSE 1071, ANSI/ISEA Z358.1, NSF/ANSI/CAN 372, and applicable sections of CSA B125.3.

FLOW CAPACITIES

MODEL	INLET	OUTLET	MINIMUM FLOW	INTERNAL COLD WATER BY-PASS AT 30PSI DROP	PRESSURE DROP							
					5	10	15	20	30	45	60	PSI
9201EW	1/2"	1/2"			.345	.689	1.03	1.38	2.07	3.10	4.13	BAR
					1	3.8	4.1	5.8	7.1	8.2	10	11.5
			4	14.4	15.5	22	26.9	31	37.9	43.5	53.4	L/MIN



THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

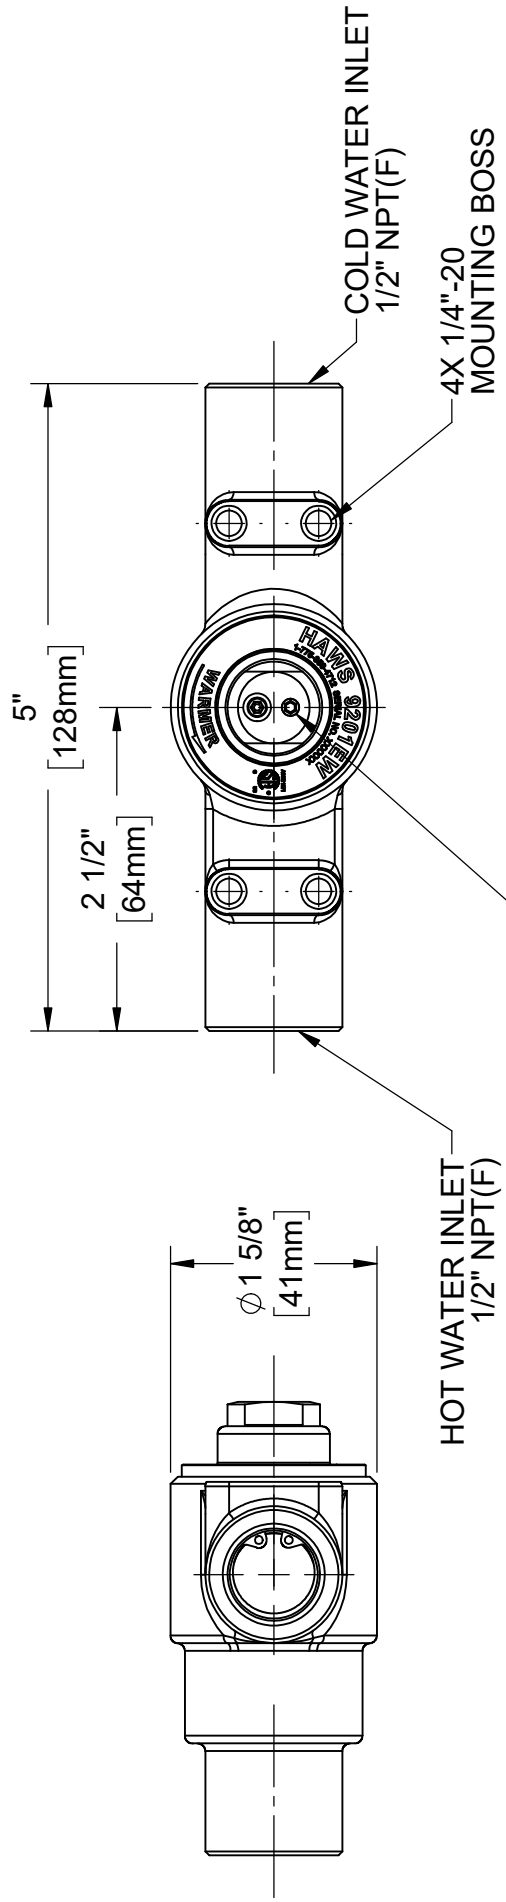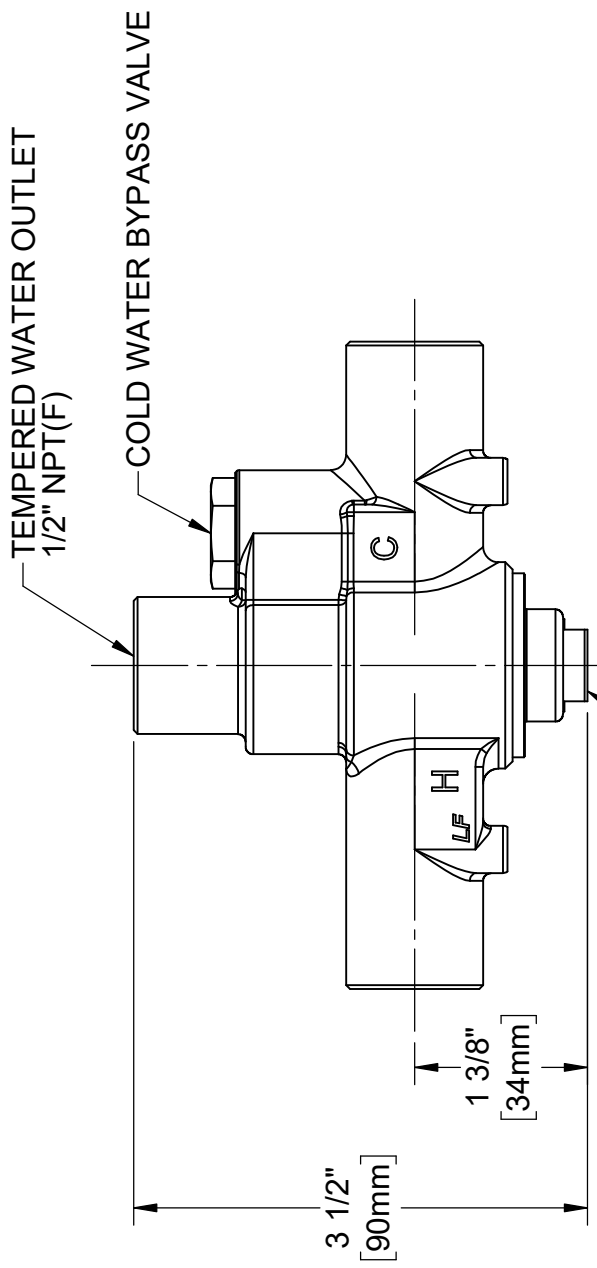

Haws
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

REV. ECN:	BY:	MODEL(S)	VALVE - 9201EW
5055	JU		
DRAWING	DATE	CHKD:	
APPROVED:	DATE	JU	
DHP	10/02/23		
SCALE:	1:1.5	DRAWING TYPE:	INSTALLATION
SIZE:	A		
PART NUMBER	0002080240.D	REVISION	6
			SHEET 1 OF 1