

FEATURES & BENEFITS

OPTIONS

For more information, visit www.hawesco.com or call (888) 640-4297.




SPECIFICATIONS


Model SP402 chrome-plated brass ball valve has a special shaft extension that allows the valve to be located in tempered environment to protect against freezing. Shaft length accommodates maximum 15" (38.1 cm) wall thickness. 1/2" NPTF inlet.

APPLICATIONS

NOTE
IN THIS VALVE POSITION FLAG IS IN THE OPEN POSITION.

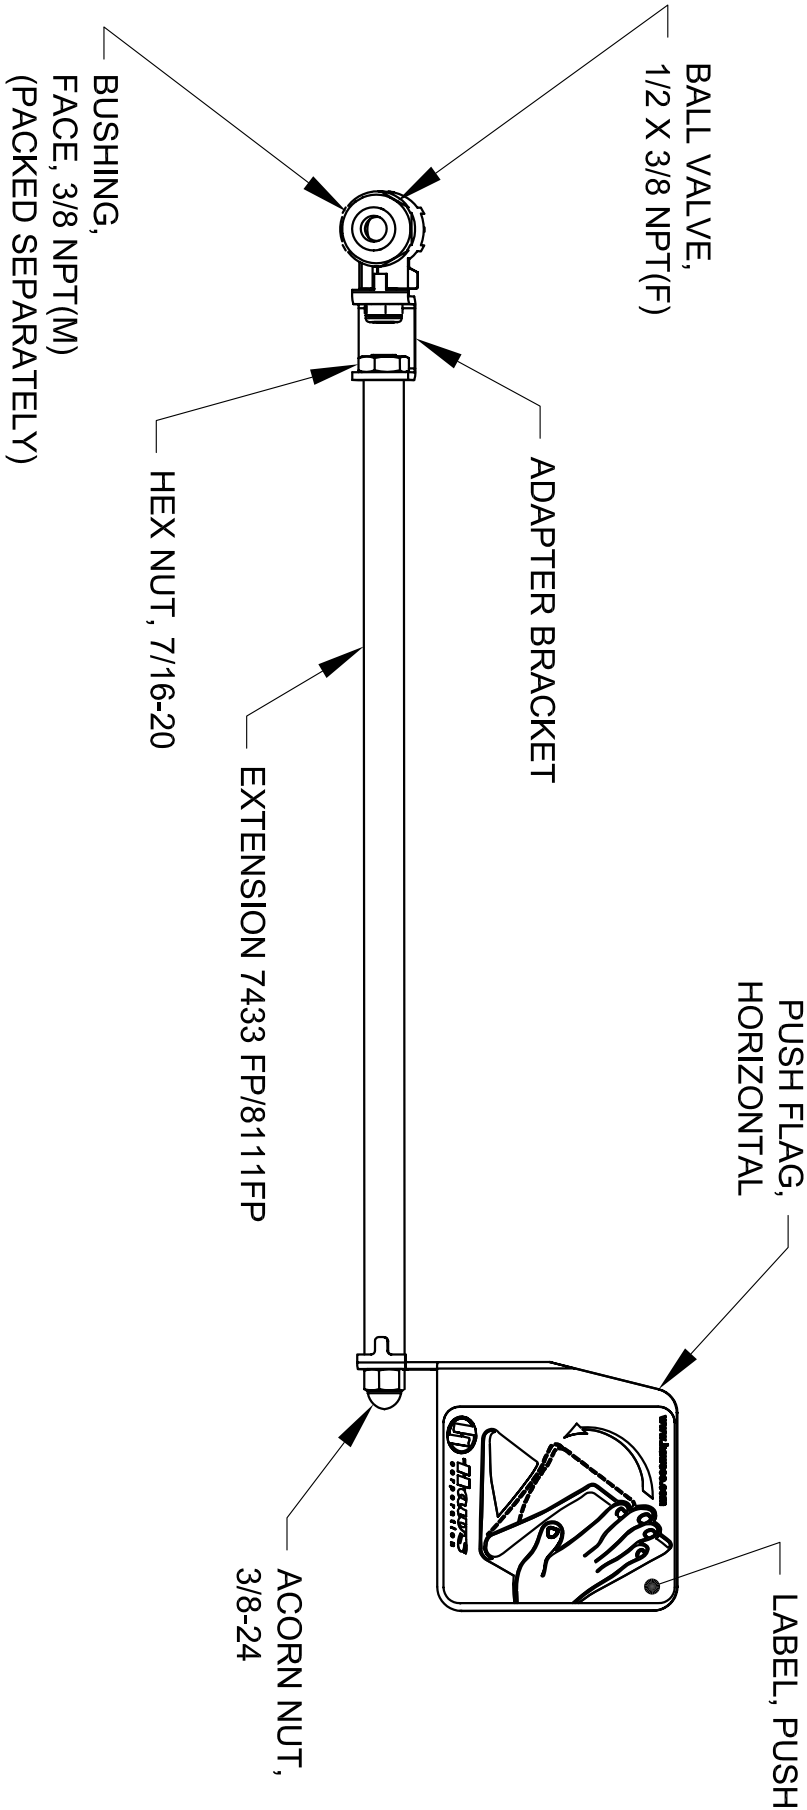

SP402



INFO FAX : 1-888-FAX-HAWS (1-888-329-4297)
1455 Kleppe Ln, Sparks, NV, 89431
Phone: 775-359-4712 Fax: 775-359-7424
Haws Ag Bockweg 3 CH-3401 Burgdorf Switzerland
Haws Mfg Pte Ltd 74 Sungai Kodut Loop Singapore 729531
e-mail: Haws@hawsco.com Website: www.hawsco.com

FOR NO.	REVISION	DATE	BY	CHKD.	DATE	MODEL(S)	INFO FAX DOC #	SCALE	DRAWING TYPE	INSTALLATION/BACK	SIZE	A	1	OF	1
SP402	02/15/85	SP402				SP402	277A02	1:1	INSTALLATION/BACK		0002080335	05417A00	3		