




NOTES:

- THIS BOTTLE FILLER REQUIRES THE USE OF MODEL 6521FR FREEZE RESISTANT VALVE ASSEMBLY (SOLD SEPERATELY OR AS PART OF PRODUCT BUNDLES).
- VALVE ASSEMBLY MUST BE INSTALLED IN A WARM AREA. PROVISIONS SHOULD BE MADE TO ALLOW ACCESS TO THE ACCESS PANEL.
- SEE SHEETS 2 AND 3 FOR BOTTLE FILLER ADULT HEIGHT APPLICATIONS AND SHEET 4 FOR CHILD ADA HEIGHT APPLICATION.
- 4. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

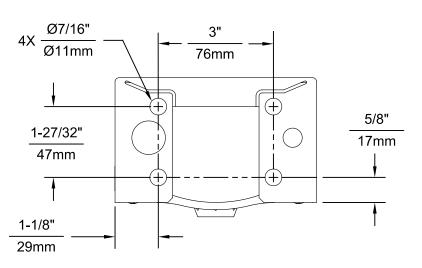

1920FR MOUNTING HOLE LOCATIONS

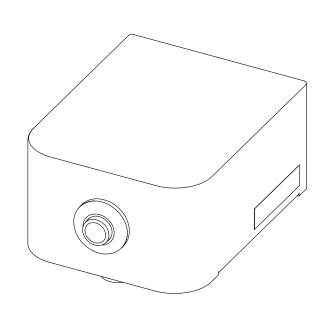




1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM PAGE 5 of

0510000491.D


©2024 Haws Corporation - All Rights Reserved. HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.

 \mathcal{O} 앜

σ

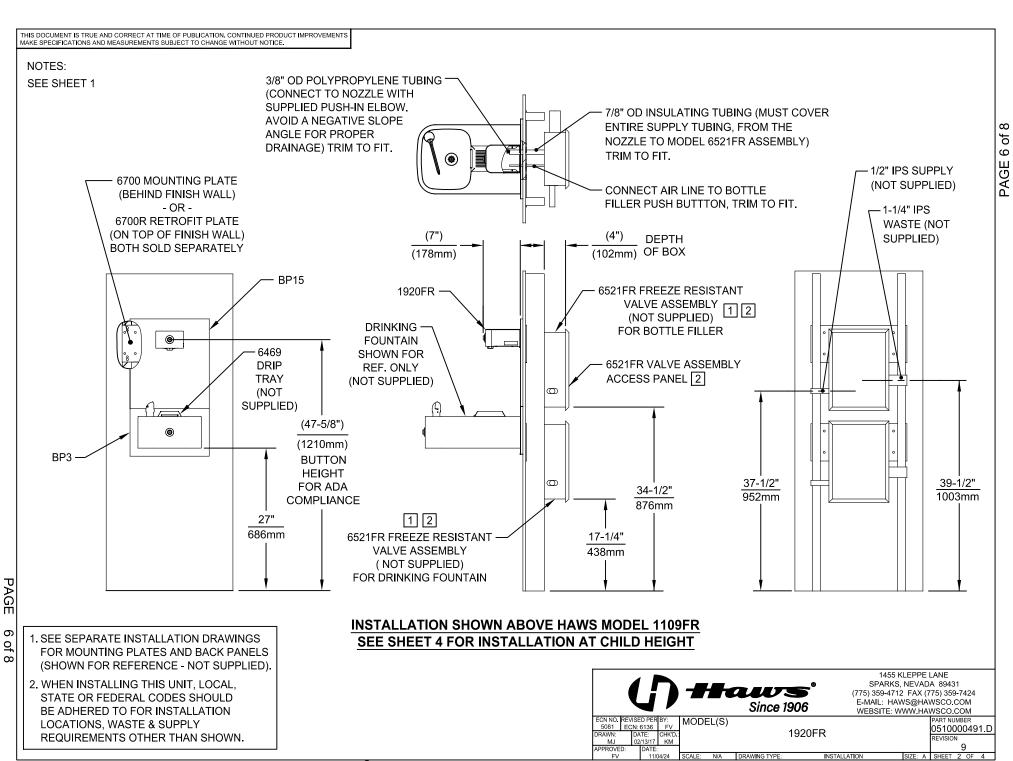

©2024 Haws Corporation - All Rights Reserved. HAWS[®] and other trademarks used in these materials are the exclusive property of Haws Corporation.

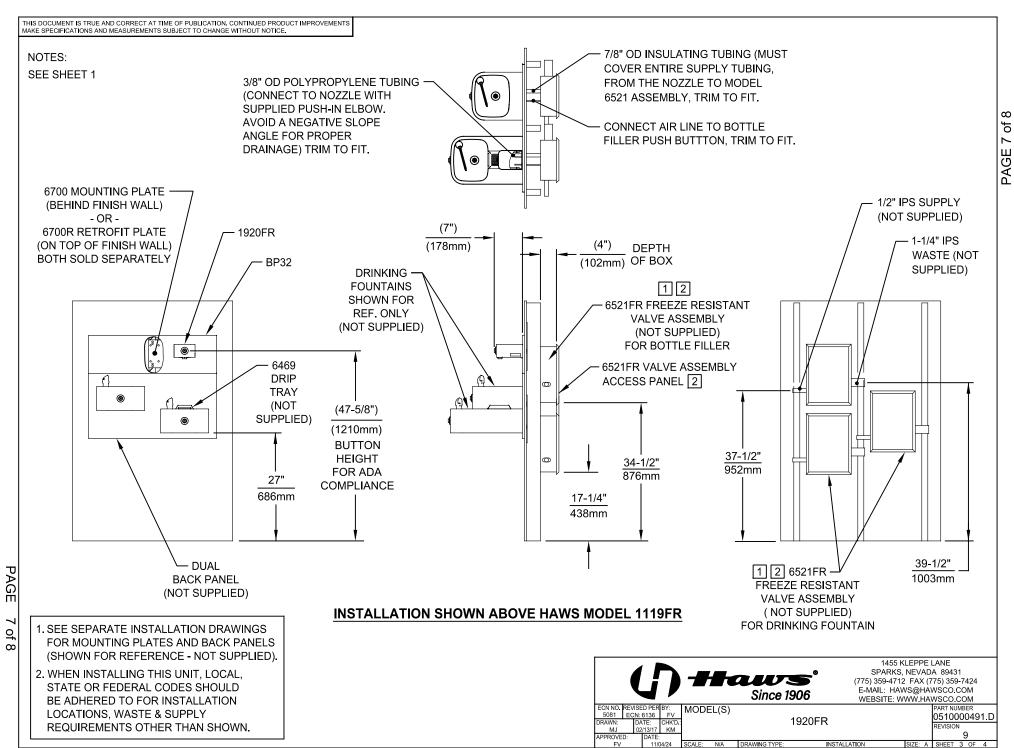



THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

NOTES:

PAGE


 ∞

으

 ∞


SEE SHEET 1


3/8" OD POLYPROPYLENE TUBING -(CONNECT TO NOZZLE WITH SUPPLIED PUSH-IN ELBOW. AVOID A NEGATIVE SLOPE ANGLE FOR PROPER DRAINAGE) TRIM TO FIT.



- 7/8" OD INSULATING TUBING (MUST COVER ENTIRE SUPPLY TUBING, FROM THE NOZZLE TO MODEL 6521FR ASSEMBLY) TRIM TO FIT.

CONNECT AIR LINE TO BOTTLE FILLER PUSH BUTTTON, TRIM TO FIT.

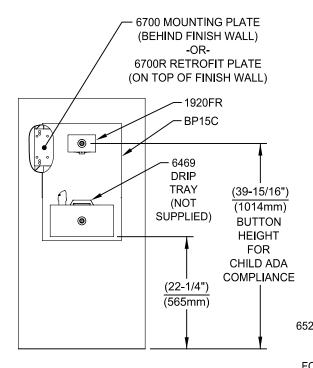

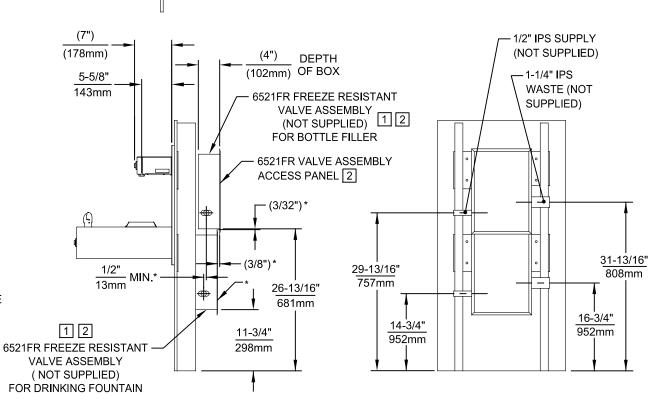

INSTALLATION SHOWN ABOVE HAWS MODEL 1109FR MUST USE PARALLEL APPROACH WITH THIS BOWL COMBINATION

- 1. HEIGHT DIMENSIONS SHOWN ARE FOR CHILD ADA APPLICATIONS:
 - BOTTLE FILLER HEIGHT AT 40" MAX.
 - DRINKING FOUNTAIN BUBBLER HEIGHT AT 30" MAX. (SEE SHEET 2 FOR ADULT ADA HEIGHT DIMENSIONS)
- SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).
- 3. * 1/2" MIN. CABINET OFFSET REQUIRED TO ALLOW LOWER ACCESS PANEL REMOVAL.
- 4. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.



1920FR

1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM

WEBSITE: WWW.HAWSCO.COM
PART NUMBER
0510000491.D
REVISION

©2024 Haws Corporation - All Rights Reserved. HAWS[®] and other trademarks used in these materials are the exclusive property of Haws Corporation.