



## INSTALLATION GUIDE

1455 Kleppe Lane ♦ Sparks, NV 89431-6467 ♦ (888) 909-4297  
♦ website: [www.Britahydrationstation.com](http://www.Britahydrationstation.com)

No. 2077011 (4)

### Model 2000SMS Brita® Hydration Station™ with Lifecycle Control

**NOTE:** A Class A ground-fault circuit interrupter (GFCI) shall be installed in the branch-circuit supplying power to this unit.

**CAUTION!** Prior to making any electrical connections, verify with a voltmeter that power from the service panel is **off**.

**SHOULD YOU EXPERIENCE DIFFICULTY WITH THE INSTALLATION OF THIS MODEL, OR REQUIRE REPLACEMENT PARTS, PLEASE CALL:**

**TECHNICAL SUPPORT:  
1-800-766-5612**

HOURS OF OPERATION: MON-THURS 7:00a.m. - 4:00p.m PT, FRI 7:00a.m.- 1:00p.m. PT

#### QUICK START REFERENCE

**PARTS LIST:** 1 Brita® Hydration Station™, 1 filter cartridge, 1 plastic drain basin, 1 hex key, 1 grommet.

**RECOMMENDED TOOLS:** Phillips screwdrivers, level.

**REQUIRED PARTS (NOT SUPPLIED):** 1/2" screwdriver stop, 3/8" tubing (to be used for water supply inlet), 6 1/8" x 3" zinc-plated steel toggle bolts, 6 zinc-plated steel 1/8" fender washers.

**PRODUCT INSTALLATION:** When installing this product, local, state or federal codes should be adhered to. This unit is certified for indoor use only.

**SUPPLY LINE:** Minimum recommended line size is 1/2" IPS with 30-90 PSI (2-6 ATM) flowing pressure; supply water is to be cold water supply. Intended for municipal water only.

**PLUMBING CONNECTIONS:** Inlet is 3/8" O.D. push-in type fitting. If a waste is desired, the Haws 6470 retrofit 1-1/4" O.D. waste kit may be used.

**ELECTRICAL CONNECTIONS:** 115VAC, 60HZ, approx. 0.14A. Unit is equipped with a standard 115VAC plug.

**RATED SERVICE FLOW:** 0.5 GPM (2725L/day)

**OPERATING TEMPERATURE:** 35–100°F (1.7–37.8°C)

**OPERATING PRESSURE:** 30-90 PSI

**FILTER CAPACITY:** 2500 gallons (9464L) or 1 year

**REPLACEMENT FILTER CARTRIDGE:** Brita® Electronic Lifecycle Control Filter Model 6429

© 2015 Haws® Corporation – All Rights Reserved  
HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.

The BRITA trademark and logo are registered trademarks of Brita, LP and used under license by Haws Corporation. All rights reserved.

# INSTALLATION PROCEDURE

**WARNING:** Make certain power is disconnected before installation to reduce risk of electrical shock.

**WARNING:** Filter is not intended to withstand operating pressures greater than 100 PSI. If inlet pressure is greater than this, filter must be protected with a pressure regulator.


## NOTES:

1. This unit is certified for indoor use only.
2. For all plastic push-in type fitting connections, only connect NSF-61 copper or plastic tubing. Stainless steel or glass tubing is not recommended. The following assembly instructions must be followed to ensure a watertight connection:
  - a. Cut tubing square and clean.
  - b. Mark from end of tube the length of insertion (See table below).
  - c. Push tube into the fitting until it bottoms out.
  - d. To remove, depress collet and pull tubing out.


Tube Sizes	O.D. Tolerance	Insertion Depth
1/4"	±.005"	11/16"
3/8"	±.005"	3/4"
1/2"	±.005"	7/8"

2. Use NSF-61 approved pipe joint sealant on all threaded water connections.
3. Do not use with water that is microbiologically unsafe or unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.
4. Use the cardboard inserts from the box to support the unit while preparing for installation by placing unit face down on inserts.
5. There is an opening in the bottom of the unit to accommodate a plumbed waste. If a plumbed waste is desired, the Haws model 6470 retrofit kit may be used.


**Step 1:** To open the unit, slide the supplied hex key into the notch in the left-hand side of the hinged upper plastic panel and press the key firmly in that same direction. This will disengage the internal spring latch. Simultaneously pull open the hinged panel (see Step 1 Diagram). Take care not to damage the stainless steel panel or the spring latch in this process.

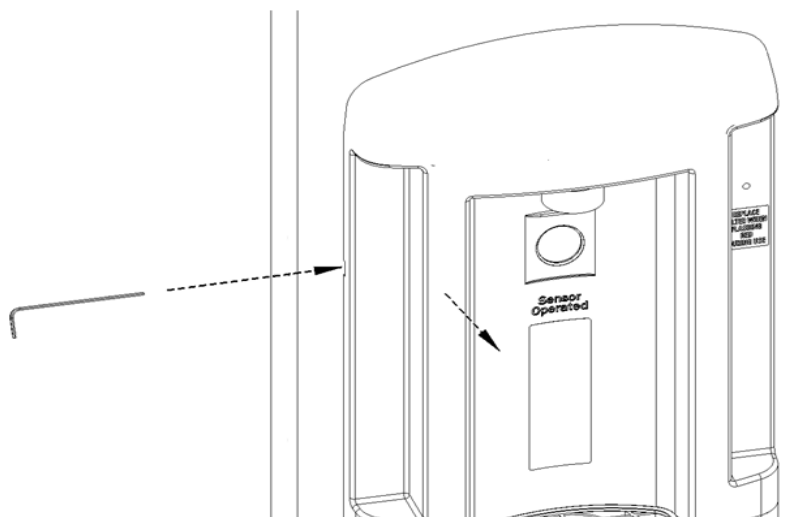

**Step 2:** Remove the 4 mounting screws on the outside of the Hydration Station with a Phillips screwdriver (see Step 2 Diagram) and remove the mounting bracket from the Hydration Station.

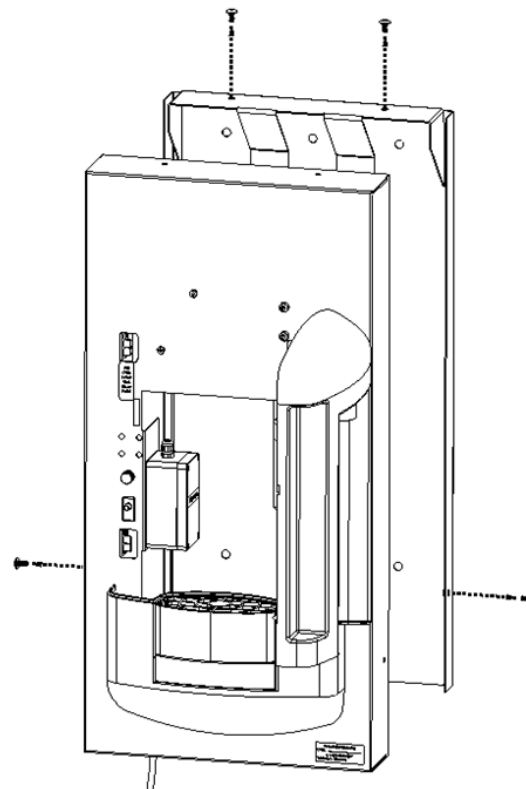


**Step 2 Diagram**

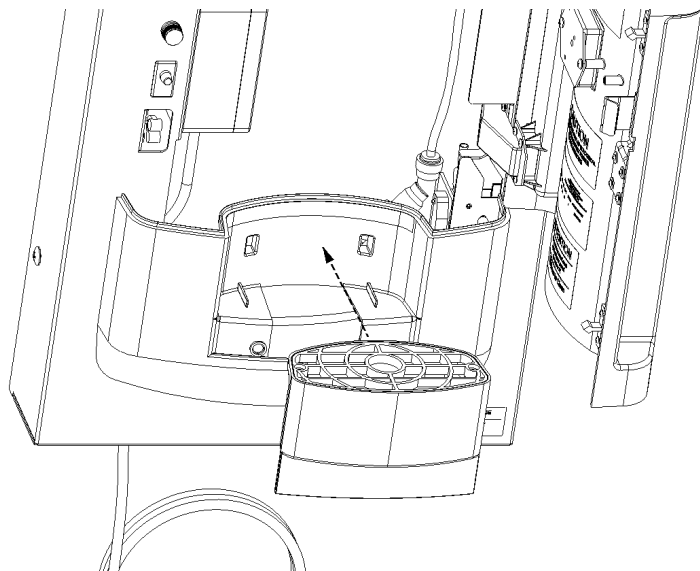


**Step 3 Diagram**

**Step 3:** Remove the drain basin, drain grate, and filter cartridge from the small box inside the main shipping carton. Install the drain basin with grate into the front of the unit (see Step 3 Diagram), pushing it straight in until the snap latches are fully engaged.

**Step 4:** Thoroughly read Trademark Usage Guidelines (TUG) in Owner's Manual on page 2 prior to removal of TUG label on filter cartridge (see Step 4 Diagram A). Removal of filter label constitutes approval of and compliance with TUG. Firmly screw the filter cartridge into the filter head (see Step 4 Diagram B). NOTE: the Hydration Station will work only if a filter cartridge is installed and its wiring is plugged in (see Step 7).



**Step 4 Diagram A**

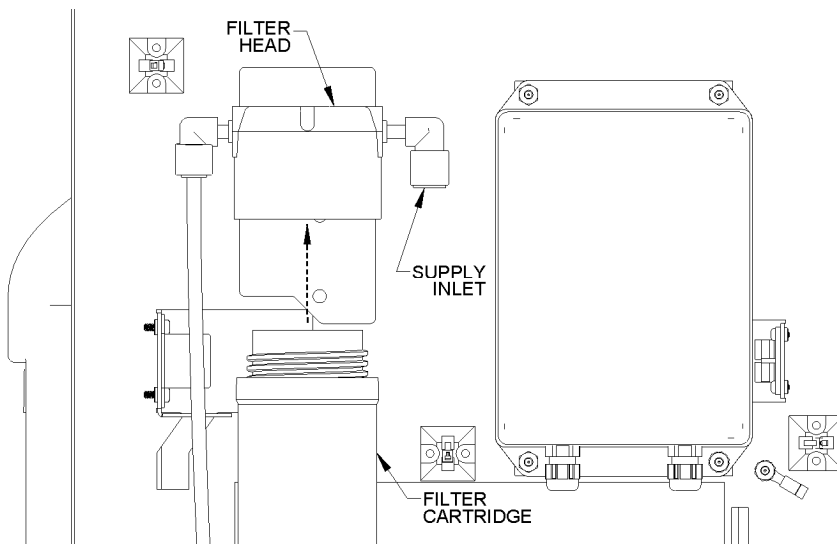

**Step 4 Diagram B (Back View)**


**Step 5:** The Hydration Station is supplied with a power cord. If desired, the power cord may be removed and the unit may be wired through one of the extra holes in the mounting bracket. Install a supply line through the bottom as shown in Steps 5 & 6 Diagram by removing the plug from the port and installing the supplied grommet – for use with 3/8" tubing. If desired, one of the extra ports in the mounting bracket may be used for the supply inlet instead. Connect the supply line with a screwdriver stop (not supplied).

Double-check supply and electrical locations.

**NOTE:** When installing this unit, all pertinent local, state, or federal codes should be adhered to.


**Step 6:** Secure the detached mounting bracket to the wall; a number of mounting holes are provided to fasten the bracket direct to the wall (see Step 5 & 6 Diagram for mounting hole pattern or use the mounting bracket itself as a template).

Note that the Hydration Station weighs approximately 30 pounds. As such, attach the mounting bracket using six 1/8" x 3" zinc-plated steel toggle bolts (not supplied) in conjunction with six appropriately-sized zinc-plated steel 1/8" fender washers (not supplied). Use a level to verify horizontal and vertical frame mounting.

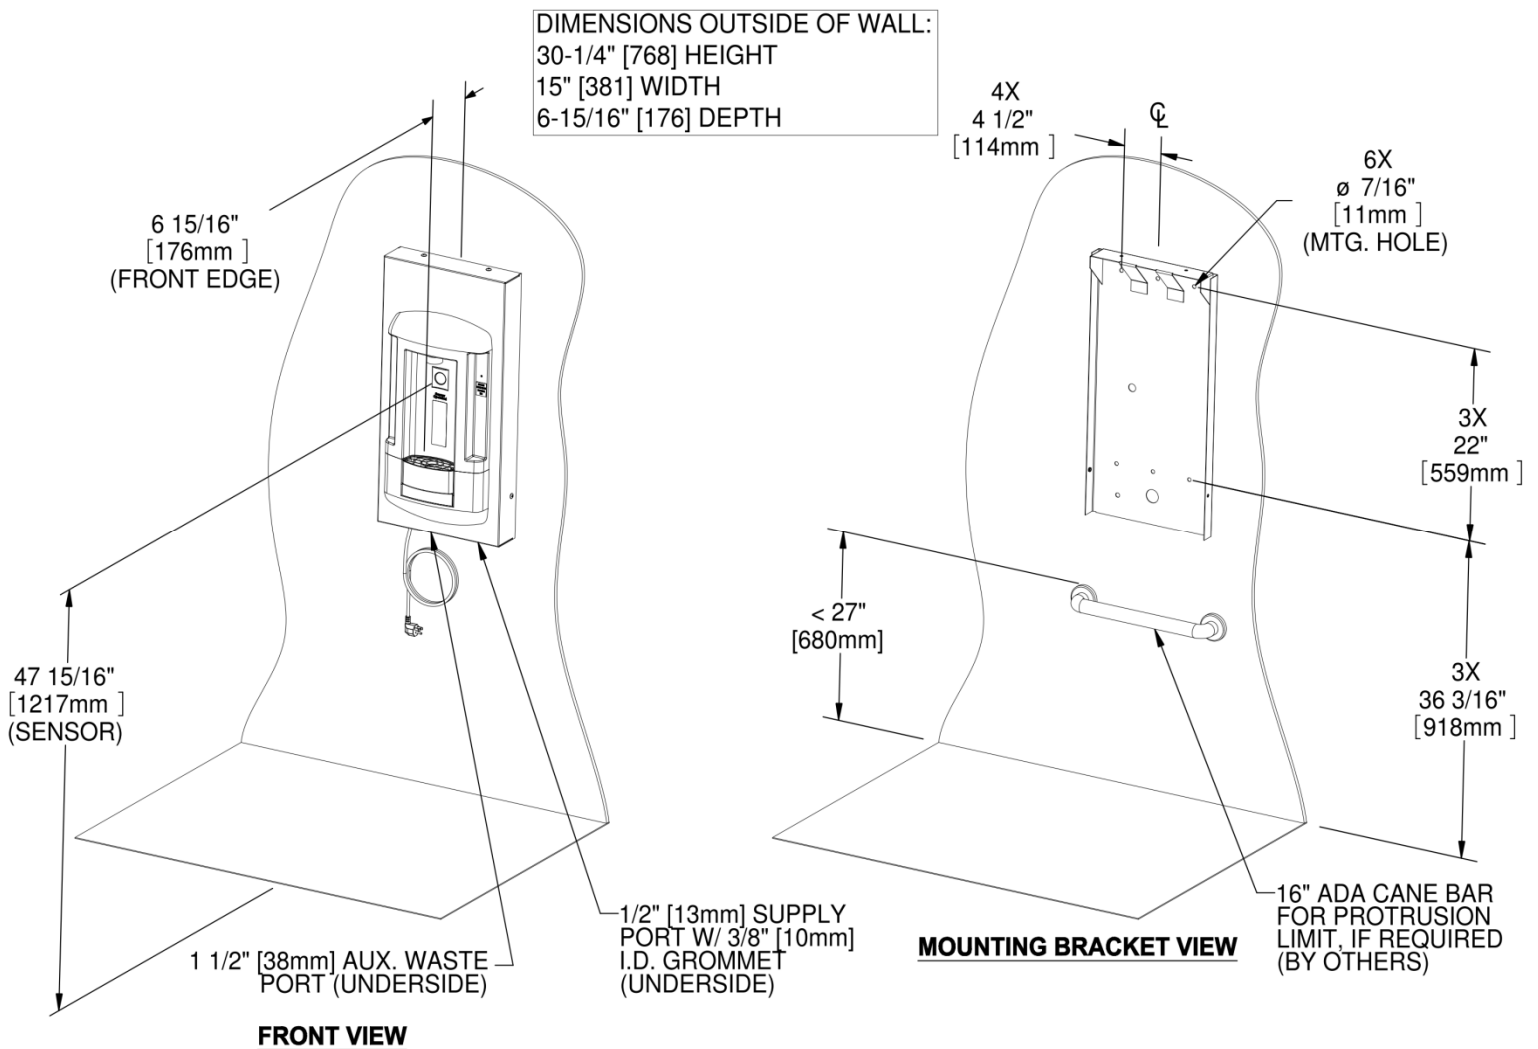

**Steps 5 & 6 Diagram**


**Step 7:** Place the Hydration Station onto its mounting bracket and run 3/8" tubing (not supplied) between the screwdriver stop (installed in Step 5) and the Hydration Station's supply inlet elbow in the filter head (it may help to temporarily remove the filter cartridge – see Step 7 Diagram). Connect the wiring coming off of the filter cartridge to the wiring coming out of the circuit board enclosure (see Step 7 Diagram).

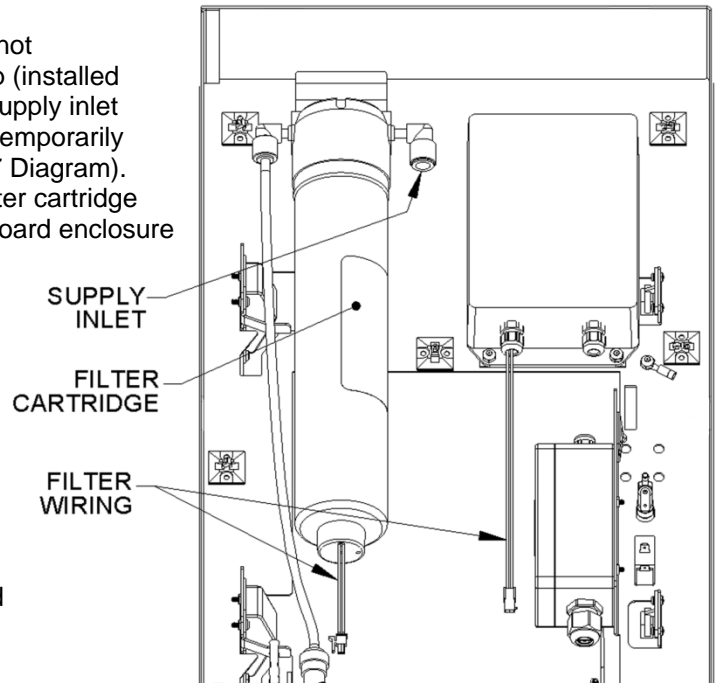


**Step 7 Diagram (Back View)**

**Step 8:** Replace the mounting screws removed in Step 2 (see Step 2 Diagram for details). Provide AC power to unit.

**Step 9:** Activate the Hydration Station by placing a bottle or cup in front of the sensor (see Step 9 Diagram A). If water does not dispense, see the Troubleshooting Guide in the Owner's Manual. The pressure regulator may need to be adjusted to better complement the input pressure at the installation site (see Step 9 Diagram B). To do so, pull out the adjustment knob and rotate as needed (clockwise from the front of the unit decreases flow); push knob in when desired flow is achieved. \* Flow rate is factory set to the maximum flow rate for decreased water consumption.

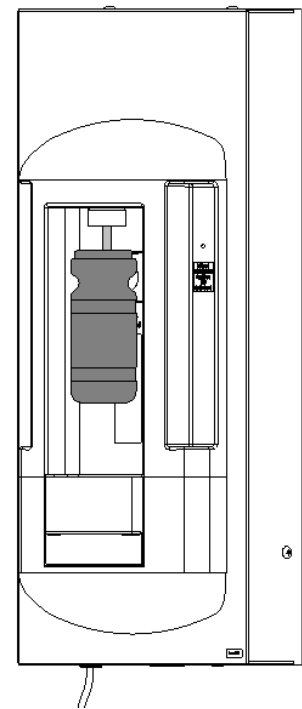

**Step 9 Diagram A**

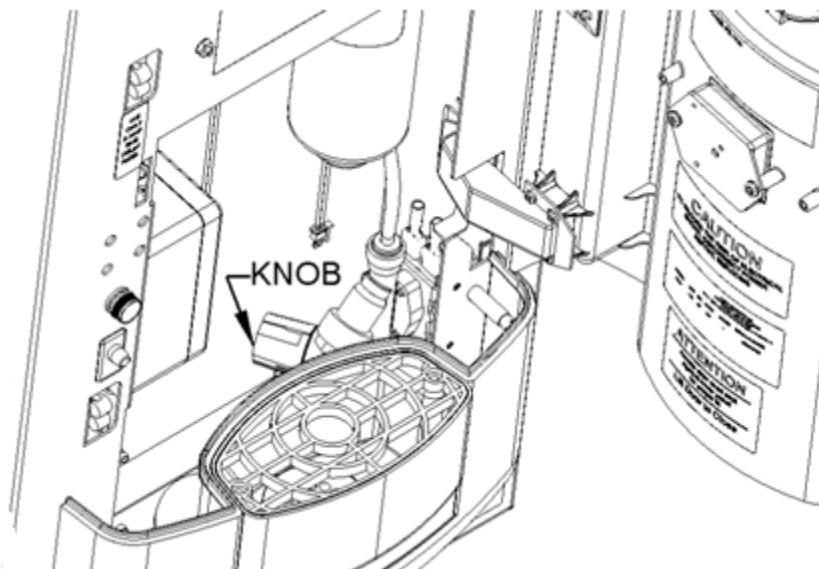

**Step 9 Diagram B**

**Step 10:** **Approximately five gallons** of water must be run through the system after the unit is installed in order to remove the loose carbon particles from the filter cartridge and any air bubbles from the system (both of these are normal occurrences after a filter change). Check the system for leaks. Place hex key in a secure location.