
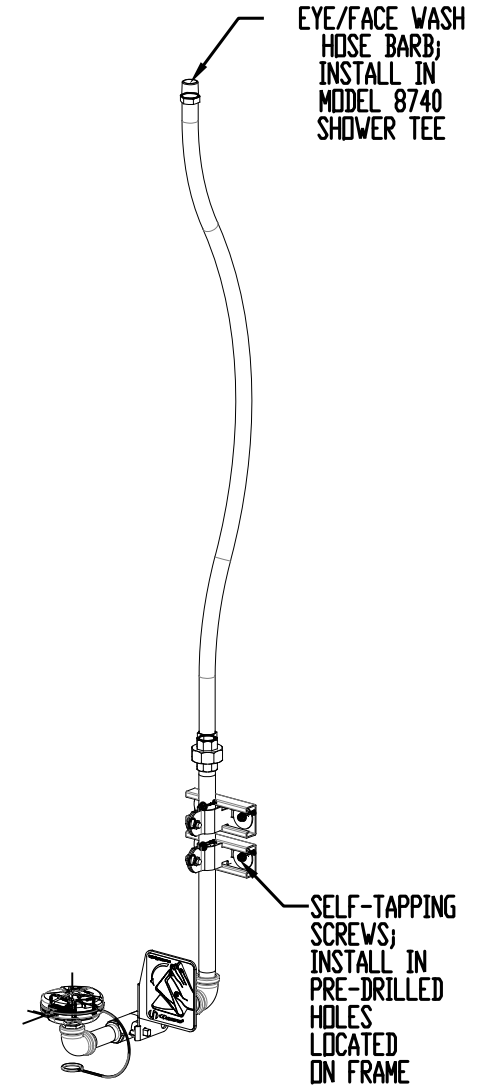


NOTES:

1. EYE/FACE WASH MATERIAL:
 PIPE & FITTINGS: GALVANIZED STEEL
 VALVE: BRONZE
 TUBING: PVC PLASTIC WITH POLYESTER BRAID
2. ANSI Z358.1 COMPLIANCE REQUIREMENTS:
 MIN FILL PRESSURE: 20 PSIG
 MAX FILL PRESSURE: 60 PSIG
 MIN FILL FLOW RATE: 20 GPM FOR SHOWER
 AND EYE/FACE WASH

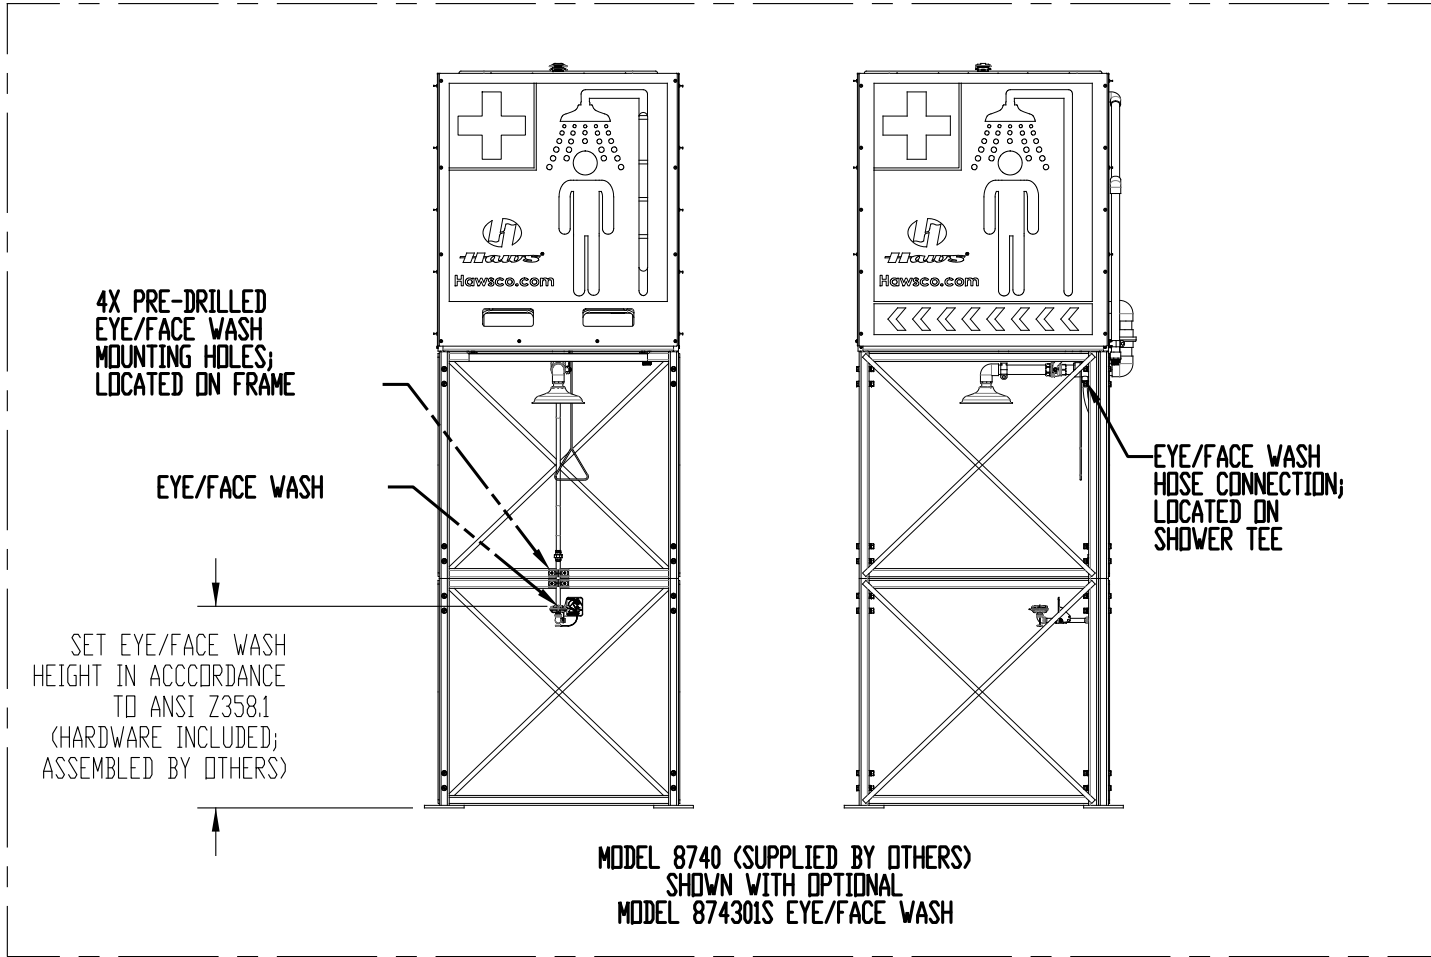

**MODEL 874301S
 EYE/FACE WASH
 ASSEMBLY**

**REFER TO MODEL 8740 MANUAL
 FOR DETAILED EYE-FACEWASH ASSEMBLY
 AND INSTALLATION INSTRUCTIONS**

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM	
		EDN: HZ213 REV: EDN: HZ213 DATE: 09/28/17 APPROVED: MJ	BY: HJ CHK'D: GC DATE: 10/09/18 SCALE: 1/4" = 1'-0" DRAWING TYPE: INSTALLATION SIZE: A
MODEL(S)		874301S -	
BRN/CF		AXION MSR Eye/Face Wash 8740 Assembly	
PART NUMBER		0510000848.D	
REVISION		1	
SHEET 1 OF 1			