


NOTES:

- 1 APPLY ONE DOT OF LOCTITE 222MS THREADLOCKER ON FEMALE THREADS OF PUSH BUTTON. SEE 5874 SERIES OPERATION AND MAINTENANCE MANUAL (PAGE 5 OF 5) FOR PROPER APPLICATION PROCEDURE.
- 2 5874PBF INCLUDES VRK5874 CARTRIDGE ASSEMBLY AND PBA6 FLANGED PUSHBUTTON.
- 3 REFER TO 5874 SERIES OPERATION AND MAINTENANCE MANUAL FOR INSTALLATION INSTRUCTIONS.
- 4 CONNECT CLEAR "POLYETHYLENE" TUBING ON FREE FLOW SIDE (VALVE TO BUBBLER HEAD) ONLY.

DRIVER, NOZZLE
.25 HEX PN
0002082253
(OPTIONAL) FOR
REMOVAL OF
NOZZLE WITH TUBE



VIEW A
ROTATED 90° CCW
DETAIL OF 5703M

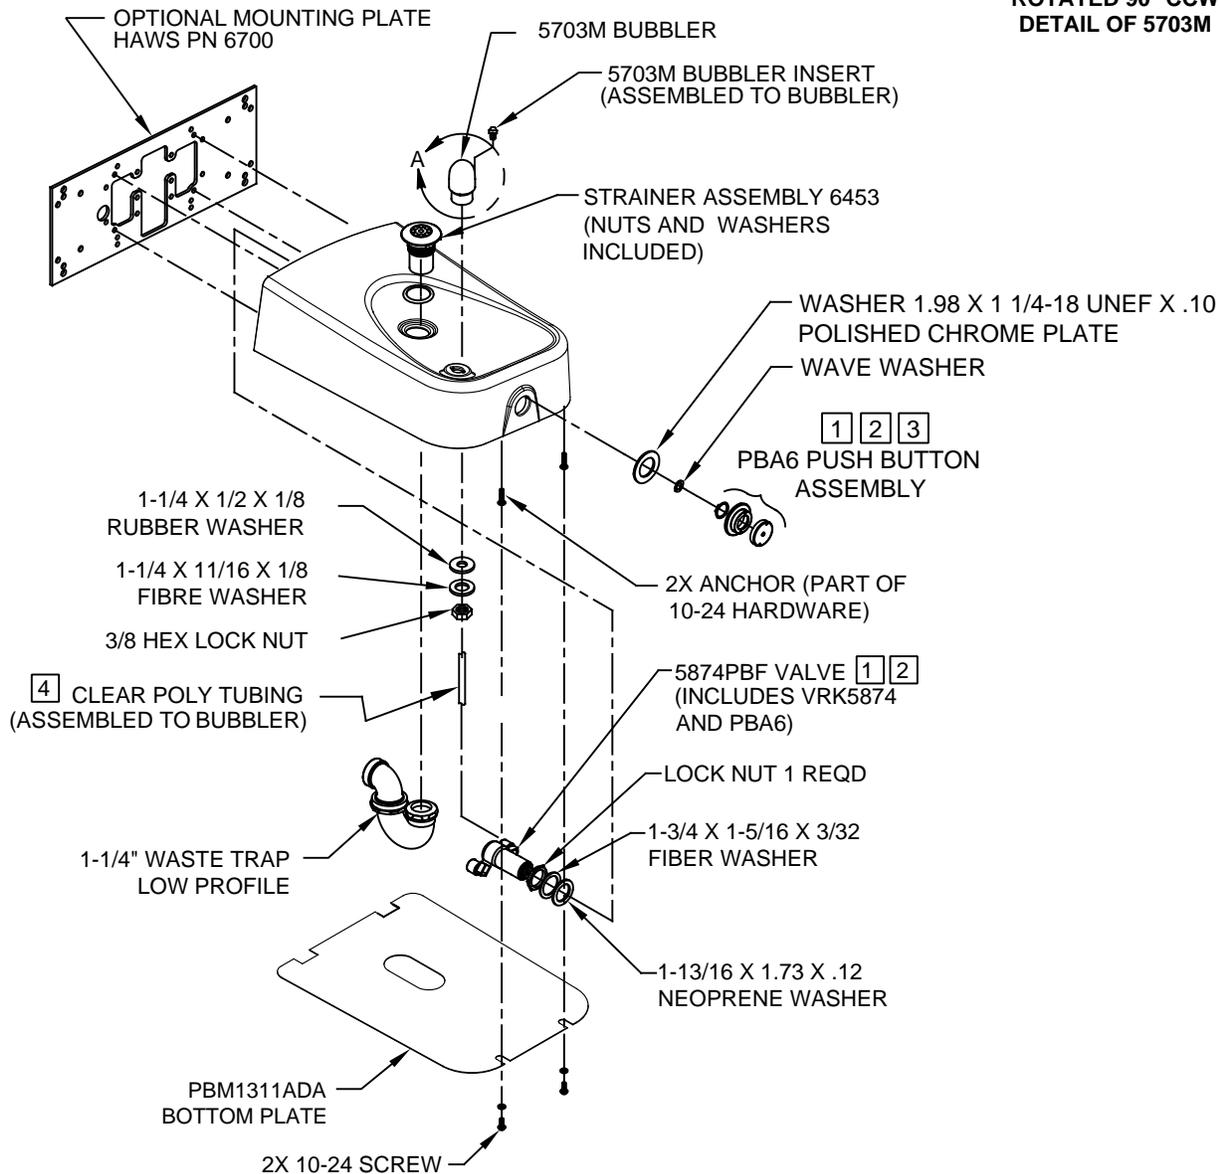

PARTS BREAKDOWN

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		ECN NO. 5010 ECN: 5258 DATE 08/25/15 APPROVED FV	REVISED PER GC DATE 11/23/17 CHECKED
WHEN ORDERING PARTS PLEASE SPECIFY MODEL NUMBER.			
SCALE: 1:4		DRAWING TYPE: PARTS BREAKDOWN	SIZE: A SHEET 1 OF 1