

FEATURES & BENEFITS

CONSTRUCTION

One-piece drinking fountains with low-profile design made of 14 gauge Type 304 stainless steel with 1/4" (.6 cm) thick stainless back plates welded in, and vandal-resistant stainless bottom plates. Satin finish resists stains and corrosion.

VANDAL RESISTANT

The bubbler heads, push button, drain strainers and bottom plates are locked in place, discouraging unwanted vandal tampering, and 30-second obstruction time-out to reduce tampering of sensor.

BUBBLER HEADS

Polished chrome-plated brass bubbler heads with integral 11/16" dia. basin shank and stainless anti-rotation roll pin for vandal resistance strength. Shielded, angled stream opening provides a steady, sanitary source of drinking water at .45 gpm.

FOUNTAIN VALVES

Fountain incorporates a touchless sensor operated stainless steel solenoid valve controlled by a transformer on one side and a push-button activated valve which offers the only all stainless steel valve body that is machined out of solid bar stock and is fully serviceable through the front of the push button assembly offering access to the water control cartridge and integral water supply strainer on the other.

ADA CONFIGURABLE

Supplied with a low profile bowl, individual adjustable panels, and multiple mounting positions, this fountain can be configured for adult and child ADA considerations.

INTEGRATED TRAP

All cast brass 1-1/4" NPT adjustable traps completely concealed inside bottom plates for easy installation and lack of unwanted access.



OPTIONS

- Bottle Filler: Model 1920HO, bottle filler can be a stand-alone station, or mounted above Haws 1117LHO series drinking fountain models.
- Bottle Filler Stand: Model BTL1107, add-on stainless steel stand to place bottle on when 1920 bottle filler is used.
- Cane Detection, Floor Mounted: Model SK6, floor mounted cane detection for the Haws Hi-Lo drinking fountains.
- Custom Logo Panel: Model 6475, Hydration By Haws™ logo panel with customization options.

For more information, visit www.hawscs.com or call (888) 640-4297.

SPECIFICATIONS

Model 1117LHO low profile ADA vandal-resistant wall mounted combination motion-activated/push-button adjustable drinking fountain shall include dual 14-gauge Type 304 Stainless Steel satin finish basins with integral 1/4" (.6 cm) thick stainless-steel back plates, touchless sensor operated solenoid valve with 30-second obstruction time-out on one side, and vandal-resistant push-button operated stainless steel valve with front-accessible cartridge and flow adjustment on the other, 100% lead free waterways, polished chrome-plated brass vandal-resistant bubbler heads, polished chrome-plated brass vandal-resistant waste strainers, vandal-resistant bottom plates, stainless steel satin finish back panel, adjustable mounting allowing either basin high or low, in-wall mounting plate, and 1-1/4" NPT concealed all cast-brass traps. The patented design allows the unit to be mounted to meet ADA or Child ADA specifications.

REQUIRES MODEL 6717 PRICED SEPARATELY.

FOR INDOOR USE ONLY

APPLICATIONS

Perfect for either public or private indoor settings, Model 1117LHO is a great fit in areas where aesthetics are important to the overall appeal of the architecture. Beautiful satin finish helps to maintain the fountains overall appeal. Specifically, this type of wall mounted drinking fountain may be placed in settings such as: schools and other locations in and around office buildings. Model meets all current Federal Regulations for the disabled including those in the Americans with Disabilities Act. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61- Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and 116876 (AB 100) "NSF/ANSI/CAN 61: Q ≤ 1".



NOTES:

1. HOLD ROUGH-IN DIMENSIONS $\pm \frac{1}{8}"$ (3.2MM).
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO. FOR INSTALLATION HEIGHTS OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY.
3. REFER TO 8874 SERIES OPERATION AND MAINTENANCE MANUAL FOR PUSH BUTTON AND VALVE INSTALLATION/MAINTENANCE INSTRUCTIONS.
4. ROUGH IN DIMENSIONS FOR FOUNTAIN HEIGHTS:

CHILD WHEELCHAIR HEIGHT: SEE SHT 3 FIG 1

WASTE: 28-1/4" (667mm)
SUPPLY: 26-1/8" (664mm)
MOUNTING HOLE: 24-13/16" (630mm)
FOUNTAIN: 24" (610mm)
BUBBLER: 29-7/8" (756mm)

ADULT WHEELCHAIR HEIGHT: SEE SHT 3 FIG 2



WASTE: 28-1/4" (743mm)
SUPPLY: 26-1/8" (740mm)
MOUNTING HOLE: 27-13/16" (706mm)
FOUNTAIN: 27" (686mm)
BUBBLER: 32-7/8" (832mm)

STANDING ADULT HEIGHT: SEE SHT 3 FIG 3

WASTE: 34-3/4" (883mm)
SUPPLY: 34-5/8" (879mm)
MOUNTING HOLE: 33-5/16" (846mm)
FOUNTAIN: 32-1/2" (828mm)
BUBBLER: 38-3/8" (972mm)




5. REFER TO MODEL 1117LHO INSTALLATION DRAWING SHEET 3 OF 3 (ON HAWS WEBSITE WWW.HAWS.CO.COM) FOR PERMISSIBLE BOWL MOUNTING PATTERNS. TWO WHEELCHAIR HEIGHT FOUNTAINS CANNOT BE MOUNTED SIDE BY SIDE PER ANSI A117.1.
6. REFER TO RKHO OR 2RKHO SERIES OPERATION INSTRUCTIONS FOR TRANSFORMER AND SENSOR SETUP.

NOTES CONTINUED ON SHEET 3 OF 3

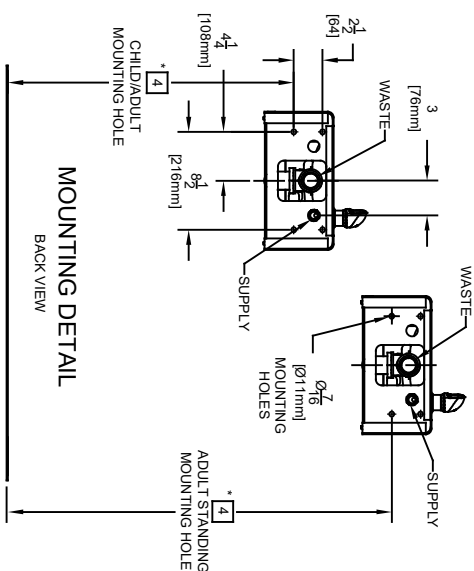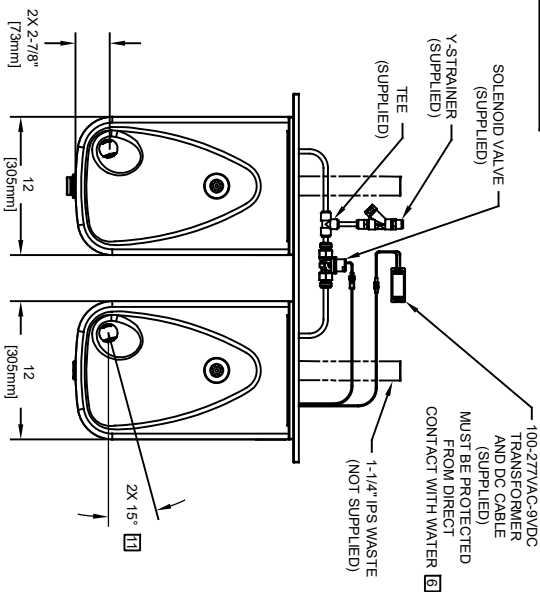

MOUNTING DETAIL


BACK VIEW

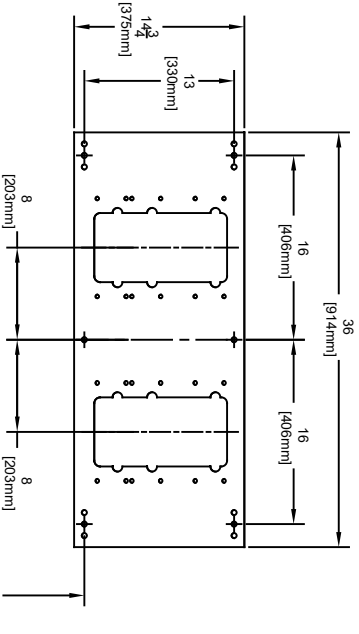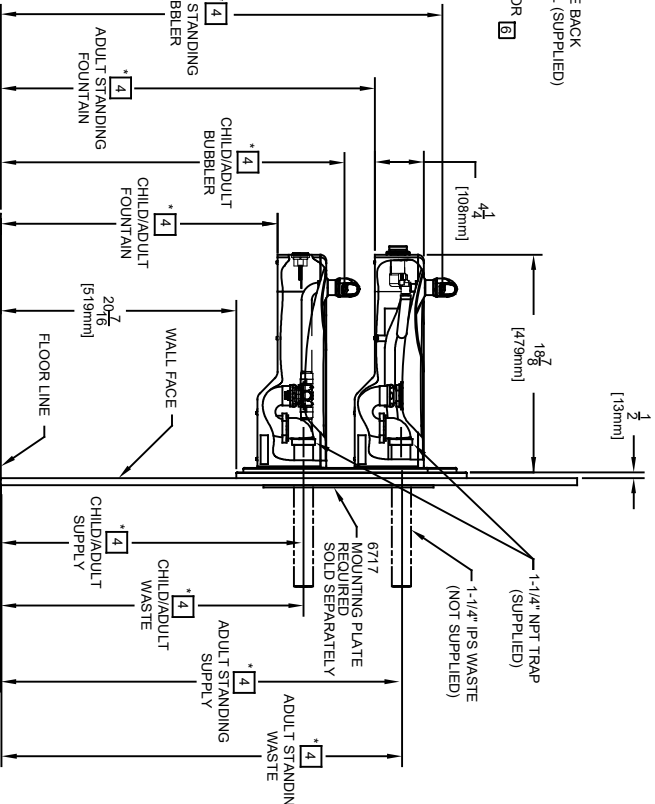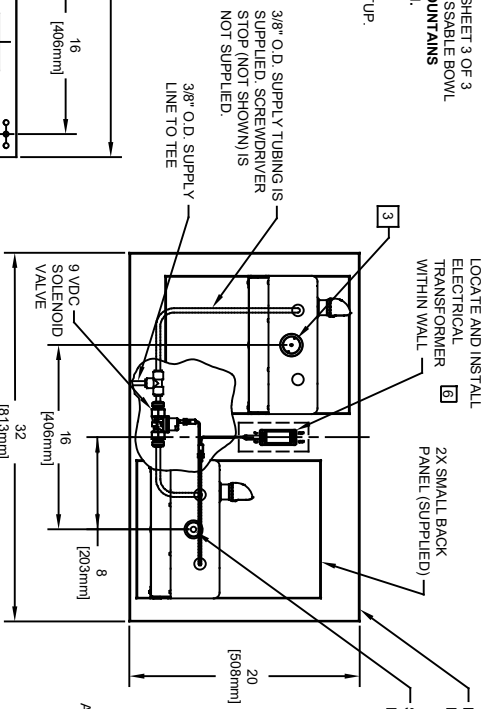

6717 MOUNTING PLATE

MUST BE INSTALLED BEFORE FINISH WORK
THIS PLATE IS REQUIRED - SOLD SEPARATELY.

SENSOR WIRING / SUPPLY PLUMBING SCHEMATIC

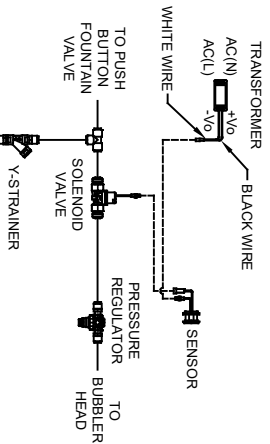

MODEL 1117LHO SHOWN
MODEL 1117LHO2 ON SHEET 2
(ROUGH-IN DIMENSIONS APPLY TO BOTH MODELS)



1456 KLEPPE LANE




SPARKS, NEVADA 89431

(775) 359-4712 FAX (775) 359-7424


E-MAIL: HAWS@HAWS.CO.COM

WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PERBY:	MODEL(S)	PART NUMBER
5712 1 ECN: 5993		0510001209.D
DRAWN: FV	DATE: 07/21/21	REVISION: 2
APPROVED: FV	DATE: 08/02/23	
SCALE: 1/2	DRAWING TYPE: INSTALLATION	SIZE: A
		SHEET 1 OF 3

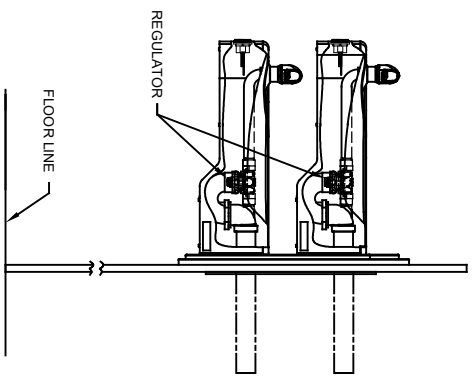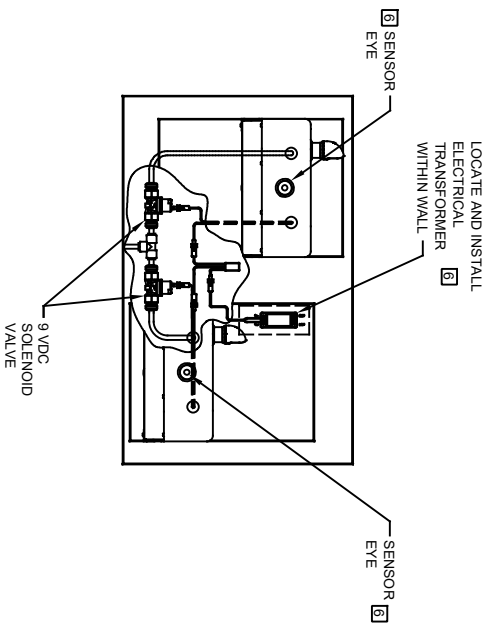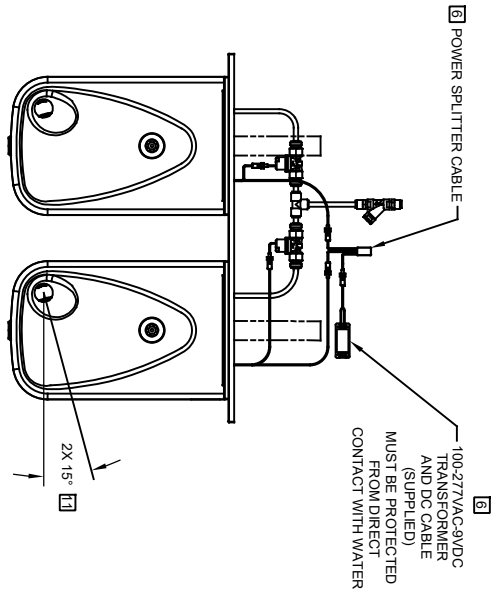

**SENSOR WIRING / SUPPLY
PLUMBING SCHEMATIC**

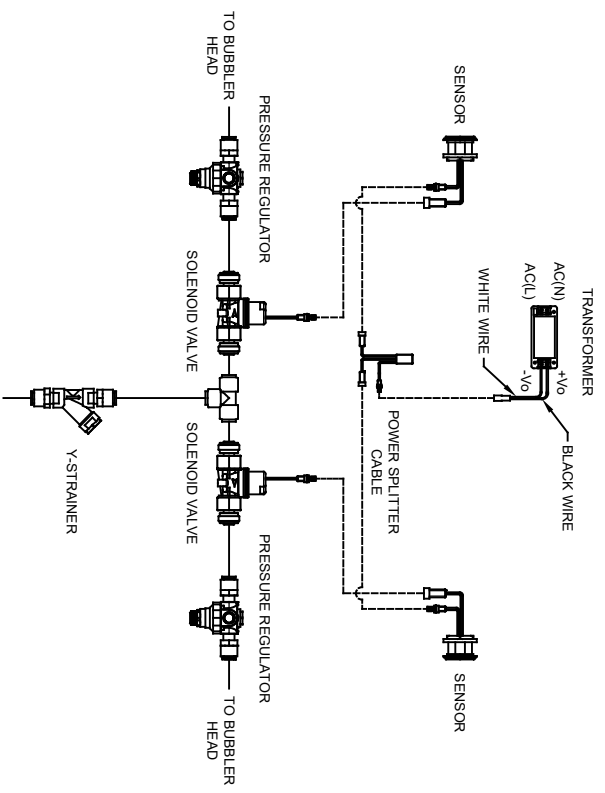

MODEL 1117LHO2 SHOWN
MODEL 1117LHO ON SHEET 1
(SEE SHEET 1 FOR APPLICABLE ROUGH-IN DIMENSIONS)

**Haws**[®]

1456 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PERBY: 5712 ECN 5993 FV
DRAWN: DATE: 07/21/21 CHKD: FV
FV DATE: 09/06/23
APPROVED: FV


MODEL(S) 1117LHO/1117LHO2

PART NUMBER 0510001209.D
REVISION 2

SCALE: 1/2 DRAWING TYPE: INSTALLATION SIZE: A SHEET 2 OF 3

NOTES:

- 8 FIGURES 1 AND 2 ARE REVERSIBLE. CAN BE RIGHT OR LEFT SIDE HIGH.
- 9 USE SHADED HOLES TO MOUNT AT INDICATED POSITIONS BASED ON COMBINATION
SELECTED (FIGS. 1 THRU 3).
- 10 MAXIMUM ADJUSTABLE RANGE IS 15° FROM PARALLEL TO BACK WALL.
- 11. REFER TO SHEET 1 OF 3, NOTE 4, FOR INSTALLED FOUNTAIN DIMENSIONS.

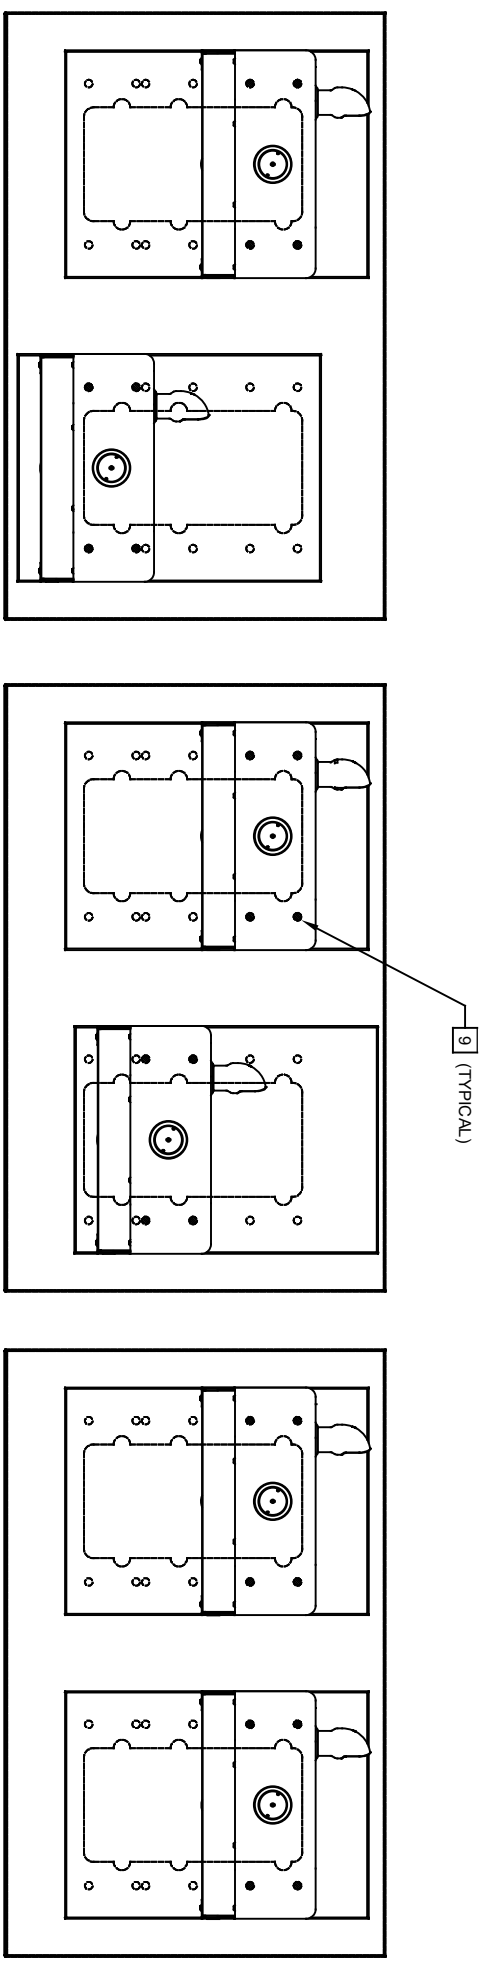

8

FIGURE 1.

ADULT STANDING/CHILD WHEELCHAIR

8

FIGURE 2.

ADULT STANDING/ADULT WHEELCHAIR

8

FIGURE 3.

ADULT STANDING/ADULT STANDING

BOWL MOUNTING PATTERNS

**Haws**[®]

1456 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PER BY: FV
5712 ECN: 5993 FV
DRAWN: DATE: CHK'D: FV
FV 07/21/21 KM
APPROVED: DATE: 09/06/23
SCALE: 1/2 DRAWING TYPE: INSTALLATION
SIZE: A SHEET 3 OF 3

MODEL(S)
1117LHO/1117LHO2
PART NUMBER
0510001209.D
REVISION
2