



**Haws**<sup>®</sup>  
Since 1906

# model H1011.8HPSH02

ADA Vandal-Resistant Chilled Motion-Activated Polished Fountain

## FEATURES & BENEFITS

### CONSTRUCTION

Rugged ADA accessible 18 gauge Type 304 high polished Stainless Steel swirl design bowl, 14 gauge Type 304 high polished Stainless Steel bracket, and a vandal-resistant bottom plate provides a long lasting unit with added peace of mind.

### VANDAL RESISTANT

The bubbler heads, round bowls, drain strainers and bottom plates are locked in place, discouraging unwanted vandal tampering.

### BUBBLER HEADS

Polished chrome-plated brass bubbler heads with integral laminar flow prevents splashing while providing a superior flow pattern. The integral 11/16" dia. basin shank and stainless anti-rotation roll pin for vandal resistance strength. Shielded, angled stream opening provides a steady source of drinking water at .45 gpm.

### DRINKING FOUNTAIN VALVES

Fountain incorporates touchless sensor operated stainless steel solenoid valves controlled by a transformer for hands free operation. A pressure regulator is used to adjust the bubbler flow according to incoming water pressures.

### MOUNTING

Heavy-duty 16-gauge galvanized steel mounting frame with welded-in heavy-duty 10 gauge mounting plate with pre-punched mounting holes. Further convenience is given to the chiller with the integral fold-out shelf.

### HANDS OFF

Touchless operation for safety and peace of mind.

## OPTIONS

- Bottle Filler: Model 1920HPSHO, bottle filler can be a stand-alone station, or mounted above Haws 1011HPSHO series drinking fountain models.
- Back Panel: Model BP32HPS, satin finish stainless steel 32" back panel for model 1920HPSHO bottle filler.
- Bottle Filler Stand: Model BTL1001, add-on stainless steel stand to place bottle on when 1920HO bottle filler is used.
- Custom Logo Panel: Model 6475, Hydration By Haws™ logo panel with customization options.

For more information, visit [www.hawsc.com](http://www.hawsc.com) or call (888) 640-4297.



## REQUIRED MODELS

Model H1011.8HPSHO2 electric vandal-resistant ADA wall mounted motion activated drinking fountain shall include dual 18 gauge Type 304 high-polished Stainless Steel basins with integral swirl design, 14gauge Type 304 Stainless Steel wall brackets, 100% lead-free waterways, touchless sensor operated stainless steel solenoid valves with 30-second obstruction time-out controlled by a transformer, polished chrome-plated brass vandal-resistant bubbler heads with integral laminar anti-squirt flow, chrome-plated brass vandal-resistant waste strainers, vandal-resistant bottom plates, high-polished stainless steel back panel and louvered intrusion-proof grill, high and low fountain mounting levels, and 1-1/4" O.D (3.2 cm) waste pipes. The R-134a refrigeration system is hermetically sealed and delivers a minimum of 8 gph (30.3 L) of water at 50° F (10° C) cooled from 80° F (26.7° C) inlet water at 90° F (32.2° C) ambient. 115 Volts, 60Hz, rated watts: 370, full load amps: 5

**REQUIRES MODEL HCR8 AND MTGFR.LG PRICED SEPARATELY.**



**FOR INDOOR USE ONLY**

## SPECIFICATIONS



Specifically, this type fountain may be placed in settings such as: schools, office buildings, shopping malls, and other indoor environments where there is a demand for a chilled water source and/or wheelchair access. Electric water coolers are not recommended or designed for outdoor applications or enclosed pool areas (chlorine). These conditions may void warranty. Model meets all current Federal Regulations for the disabled including those in the Americans with Disabilities Act. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61- Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and 116876 (AB 100) "NSF/ANSI/CAN 61: Q ≤ 1". Haws electric water coolers comply with ARI Standard 1010 and ANSI A117.1, and are listed by Underwriter Laboratories to U.S. and Canadian standards.





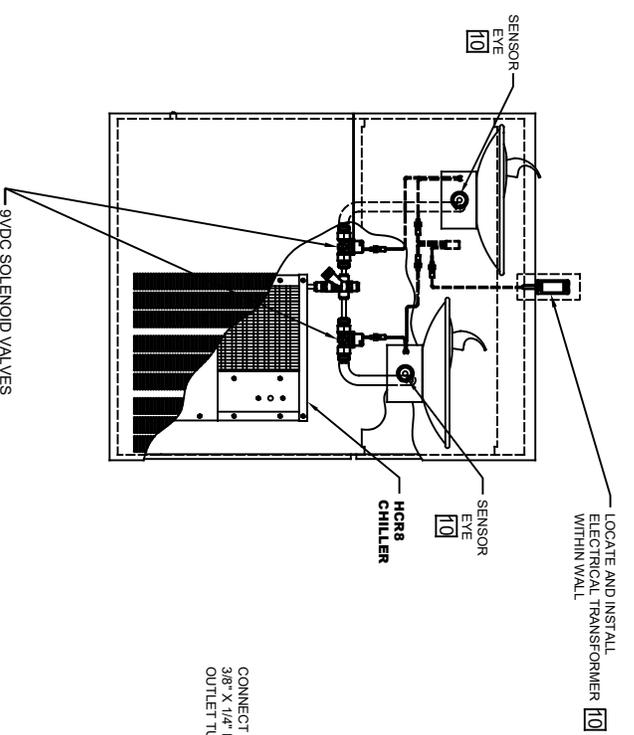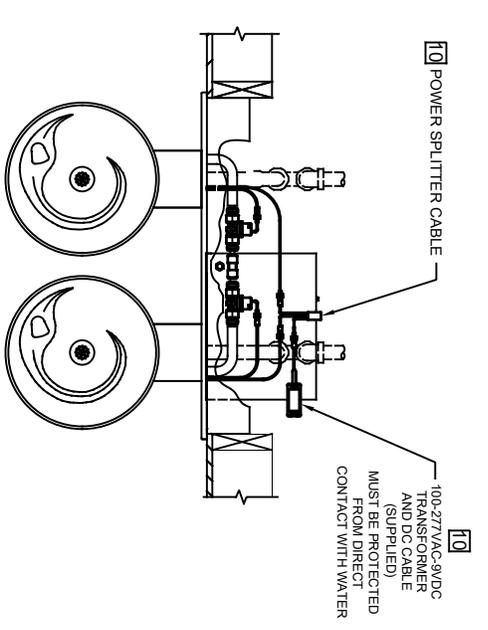

CONNECT 3/8" PUSH-TO-CONNECT TEE TO 3/8" X 1/4" REDUCER THEN TO 1/4" DIAMETER OUTLET TUBE ON HCR8 WATER CHILLER

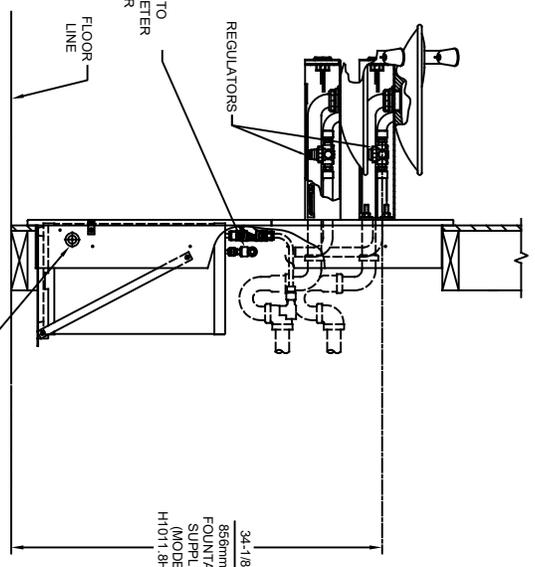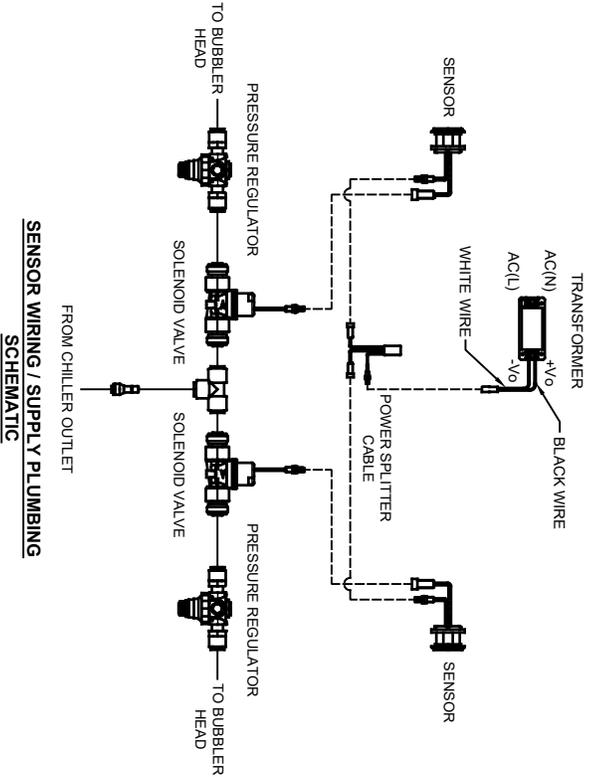

MODEL H1011.8HO2 SHOWN  
MODEL H1011.8HO ON SHEET 1  
(SEE SHEET 1 FOR APPLICABLE ROUGH-IN DIMENSIONS)

		<b>MODEL(S)</b>	
1456 KLEPPE LANE SPARKS, NEVADA, 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM		H1011.8HO/H1011.8HO2	
ECN NO. REVISED PER BY:	DATE:	CHKD:	DP:
ECN: 5698	07/22/20		
DRAWN:	DATE:	CHKD:	DP:
FV			
APPROVED:	DATE:	SCALE:	DRAWING TYPE:
BJM	09/30/21	NA	INSTALLATION
PART NUMBER		REVISION	
0002080250.D		28	