

model **1920HO**

Vandal-Resistant Motion-Activated Bottle Filler

FEATURES & BENEFITS

CONSTRUCTION

Unit is made of 14 gauge Type 304 stainless steel with a satin finish that resists stains and corrosion, and has soft rounded corners. Unit features vandal-resistant bottom plate and dispensing nozzle.

BOTTLE FILLER VALVE

Bottle filler incorporates a touchless sensor operated stainless steel solenoid valve controlled by a transformer for handsfree operation. A pressure regulator is used to adjust the bubbler flow according to incoming water pressures.

TAMPER RESISTANT

30-second obstruction time-out to reduce tampering of sensor, and vandal-resistant bottom plate.

LAMINAR FLOW

Adjustable, splash-free, 1 gpm (3.78 L) laminar water flow.

EFFICIENT & FLEXIBLE INSTALLATION

Unit is designed for retrofit or new construction applications. No drain required for mounting over existing drinking fountain.

MOUNTING OPTIONS

Select from mounting plate and back panel options to complete installation. Unit can mount on various wall types.

OPTIONS

- Water Filter: Model 6480 filter kit with 3000 gallon carbon block filter, filter head, and mounting bracket.
- Mounting Plate: Model 6700 in-wall mounting plate is used with the 1920 series bottle fillers for single or dual fountain retrofit installations.
- Mounting Plate: Model 6700R on-wall mounting plate is used with the 1920 series bottle fillers for single or dual fountain retrofit installations.
- Back Panel: Model BP15, satin finish stainless steel 15 inch back panel for Model 1920 over single fountains.
- Back Panel: Model BP32, satin finish stainless steel 32" back panel for model 1920 over dual fountains.

For more information, visit <u>www.hawsco.com</u> or call (888) 640-4297.



SPECIFICATIONS

Model 1920HO motion-activated wall mounted vandal-resistant bottle filler shall include 100% lead-free waterways, satin stainless-steel construction, vandal-resistant sensor operated stainless steel solenoid valve controlled by a transformer, vandal-resistant bottom plate and 1 gpm (3.78 L) laminar flow. It can be used as a stand-alone station or mounted above the Haws® 1001, 1011, 1107L, 1109, 1117L, and 1119 series drinking fountains.

This product requires a mounting plate; either the Haws model 6700 in-wall or the 6700R on-wall support plate.

FOR INDOOR USE ONLY


APPLICATIONS

This type of indoor wall mounted bottle filler may be placed in settings such as schools and other locations in and around office buildings. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CSA 61-Section 9, NSF/ANSI/CSA 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and 116876 (AB 100) "NSF/ANSI/CAN 61: $0 \le 1$ "




0510001063.D


PAGE 5 of 12

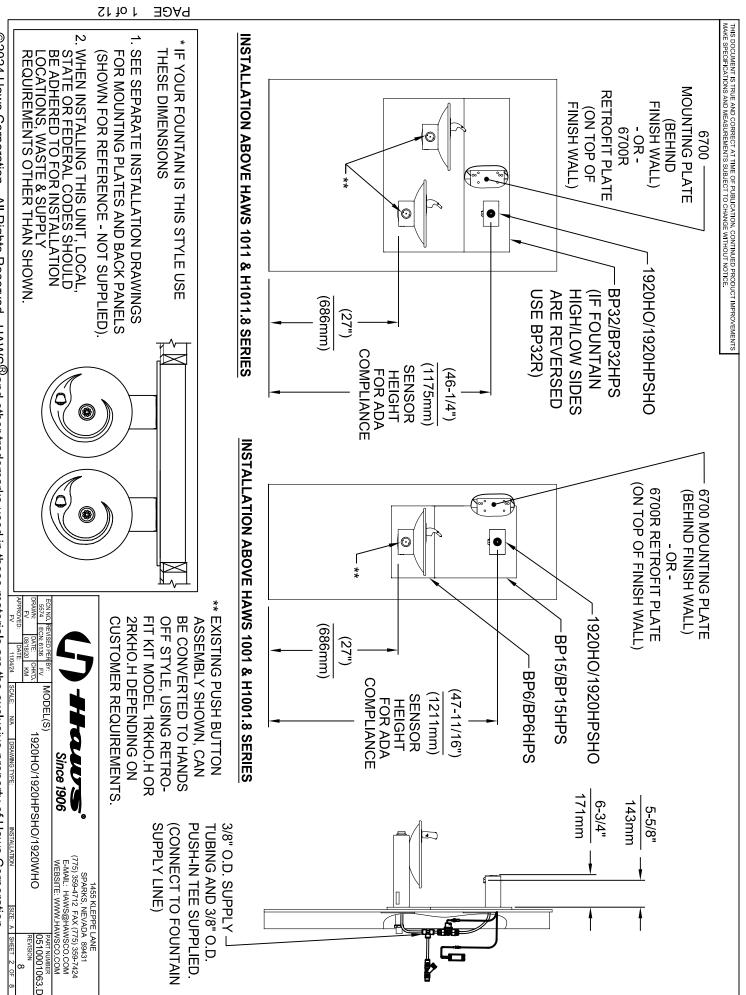



PAGE 6 of 12

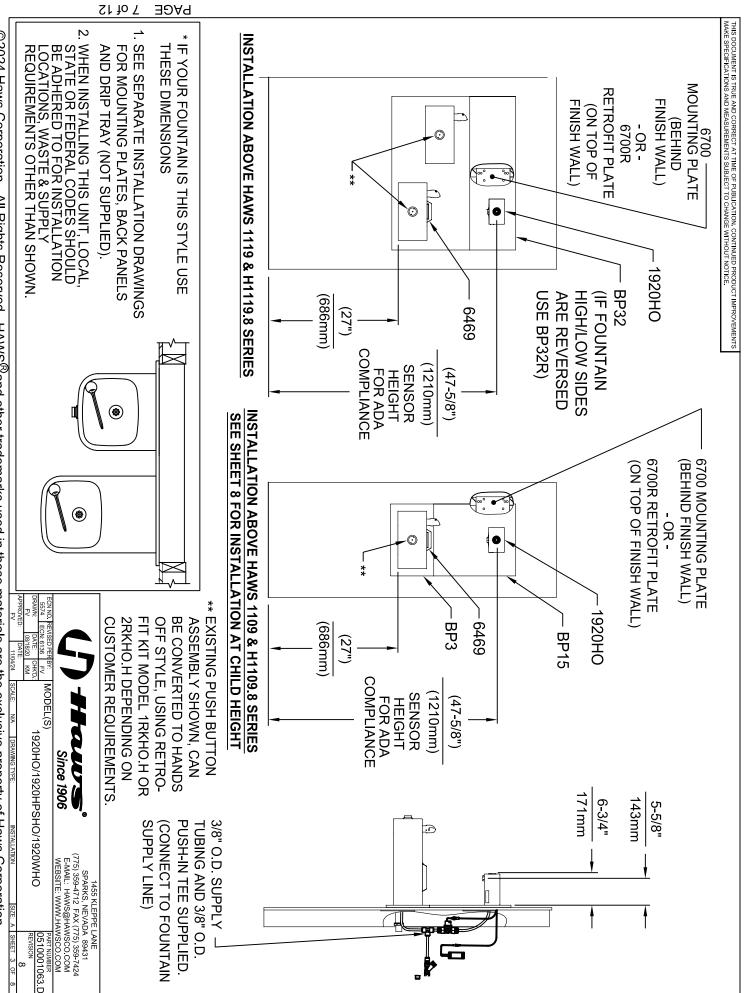

PAGE 7 of 12

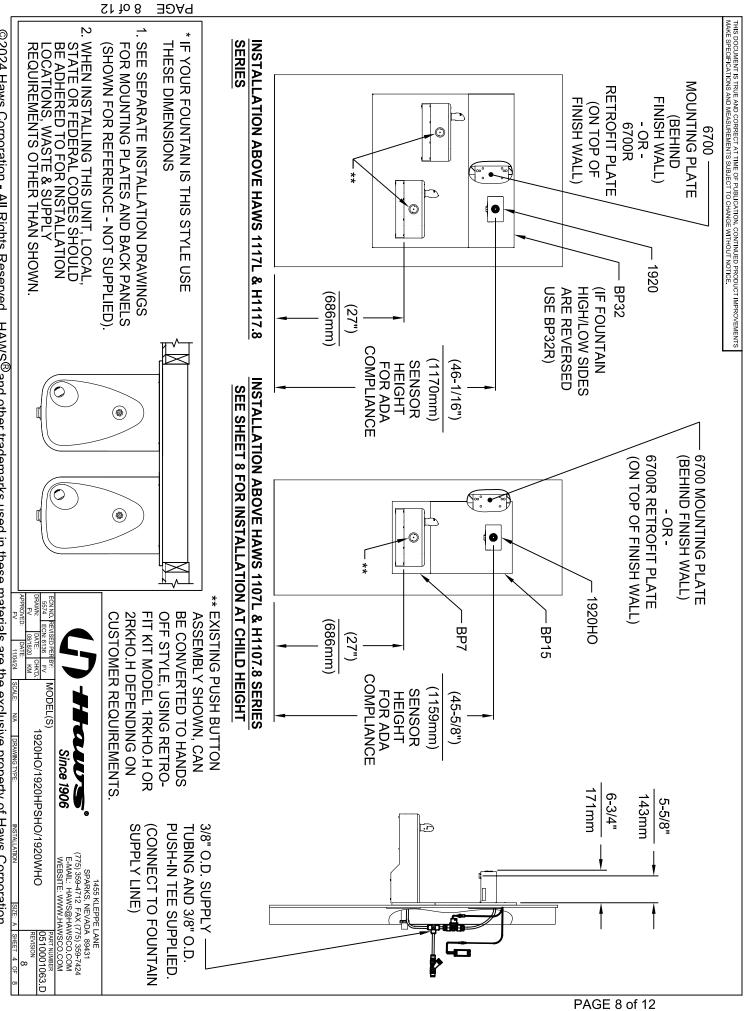

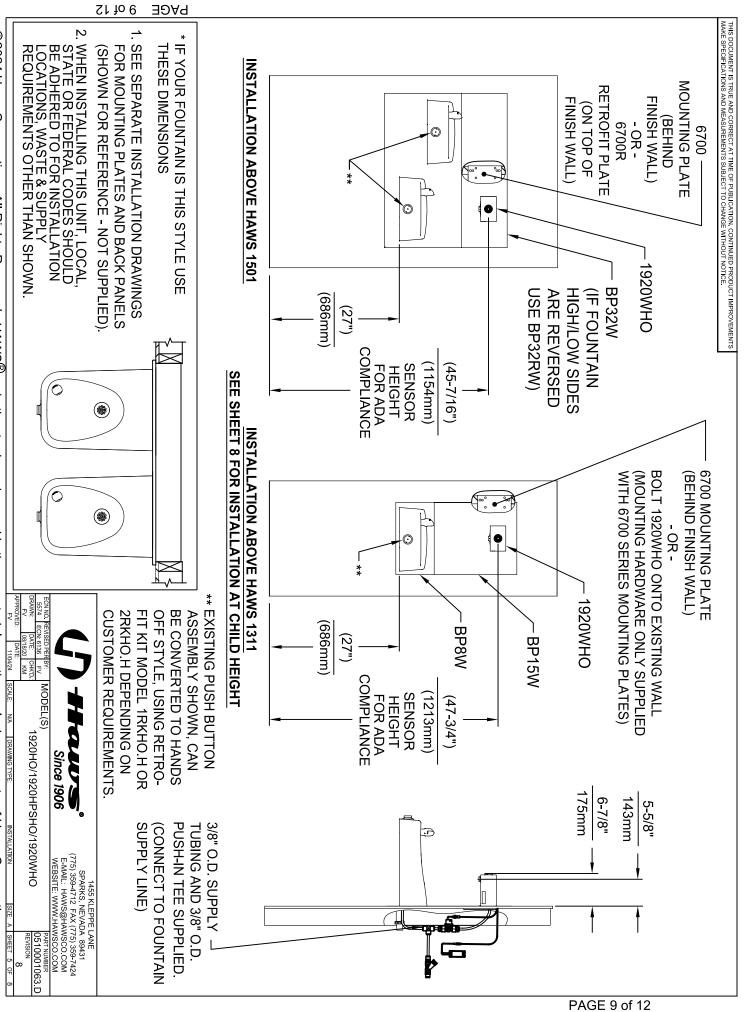

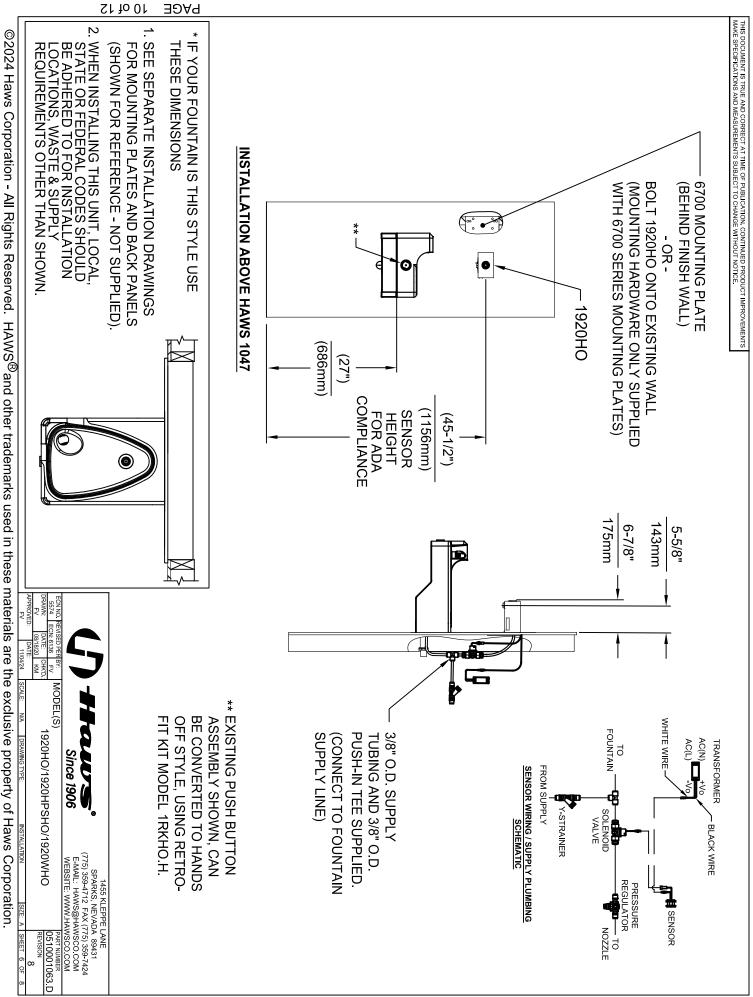

PAGE 10 of 12

PAGE 11 of 12

PAGE 12 of 12

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

6700 MOUNTING PLATE

(BEHIND FINISH WALL)

6700R RETROFIT PLATE

7-1/4"

143mm 5-5/8"

BOLT 1920 ONTO EXISTING WALL

(BEHIND FINISH WALL)

6700 MOUNTING PLATE