

FEATURES & BENEFITS

CONSTRUCTION

Rugged ADA accessible 18 gauge Type 304 Stainless Steel swirl design bowls, 14 gauge Type 304 Stainless Steel brackets, and a vandal-resistant bottom plate provides a long lasting unit with added peace of mind.

BOTTLE FILLER

14-gauge Type 304 stainless steel bottle filler housing with touchless operation and 1 gpm (3.78 L) laminar flow with 30-second obstruction time-out.

VANDAL RESISTANT

The bubbler heads, push button, round bowls, drain strainers and bottom plates are locked in place, discouraging unwanted vandalism, and 30-second obstruction time-out to reduce tampering of sensor.

BUBBLER HEADS

Polished chrome-plated brass bubbler heads with integral laminar flow prevents splashing while providing a superior flow pattern. The integral 11/16" dia. basin shank and stainless anti-rotation roll pin for vandal resistance strength. Shielded, angled stream opening provides a steady source of drinking water at .45 gpm.

FOUNTAIN VALVES

Fountain incorporates touchless sensor operated stainless steel solenoid valves controlled by a transformer on the bottle filler and on one side of the fountain, and a push-button activated valve which offers the only all stainless steel valve body that is machined out of solid bar stock and is fully serviceable through the front of the push button assembly offering access to the water control cartridge and integral water supply strainer on the other.

MOUNTING

3/16" (.47 cm) thick steel mounting plate is larger, thicker and stronger than any other plate in the industry, and shall include the all-thread studs, nuts, and washers which allows for easy installation to a framed wall.

OPTIONS

- Support Frame: Model 6800 In-wall floor mounted fixture support legs, welded steel 4-bolt floor flanges, and supplied with 'U' bolts and hardware.
- Mounting Plate: Model 6700R, on-wall mounting plate for model 1920.
- Mounting Plate: Model 6700, in-wall mounting plate for model 1920.
- Access Panel: Model 6603HPS, high-polished stainless steel access panel. Includes frame and screws.

For more information, visit www.hawsco.com or call (888) 640-4297.



REQUIRED MODELS

1011HPSHO / 6700.4 / 1920HPSHO / BP32HPS

Order these items to make up Model 1011HPSHO-1920HPSHO fountain with stainless steel back panel, bottle filler with stainless steel back plate, and fountain mounting plate shown above.


FOR INDOOR USE ONLY

SPECIFICATIONS

Model 1011HPSHO-1920HPSHO wall mounted ADA vandal-resistant combination motion-activated/push button drinking fountain and bottle filler shall include dual 18 gauge Type 304 high-polished stainless steel basins with integral swirl design, 14 gauge Type 304 high-polished stainless steel wall brackets and bottle filler bracket, 100% lead-free waterways, touchless sensor operated solenoid valves with 30-second obstruction time-out on bottle filler and on one side of fountain, and vandal-resistant push-button operated stainless steel valve with front-accessible cartridge and flow adjustment on the other, 1 gpm (3.78 L) bottle filler laminar flow, polished chrome-plated brass vandal-resistant bubbler heads with integral laminar anti-squirt flow, chrome-plated brass vandal-resistant waste strainers, vandal-resistant bottom plates, polished stainless steel back panel, high and low fountain mounting levels, and 1-1/4" O.D. (3.2 cm) waste pipes. (P-trap and stop require rear access) Manufactured to be lead-free by all known definitions including NSF/ANSI/CAN 61-Section 9, NSF/ANSI/ CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and NSF/ANSI/CAN 61: Q ≤ 1.

The bottle filler requires a mounting plate; either the Haws model 6700 in-wall or the 6700R on-wall support plate.



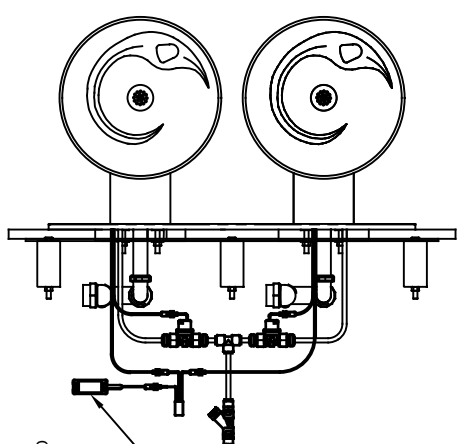


100-277VAC 9VDC TRANSFORMER AND HO CABLE (SUPPLIED) MUST BE PROTECTED FROM DIRECT CONTACT WITH WATER [6]

LOCATE AND INSTALL ELECTRICAL TRANSFORMER [6] WITHIN WALL


[6] SENSOR EYE

POWER SPLITTER CABLE [6]

SENSOR EYE [6]

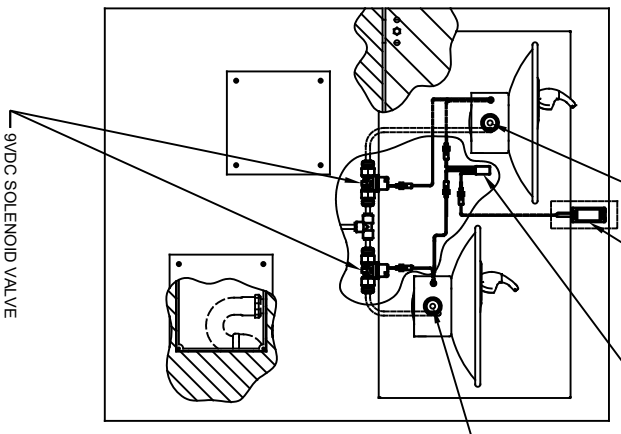


9VDC SOLENOID VALVE

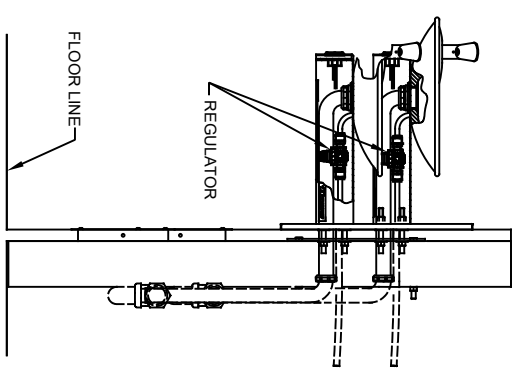

REGULATOR

FLOOR LINE

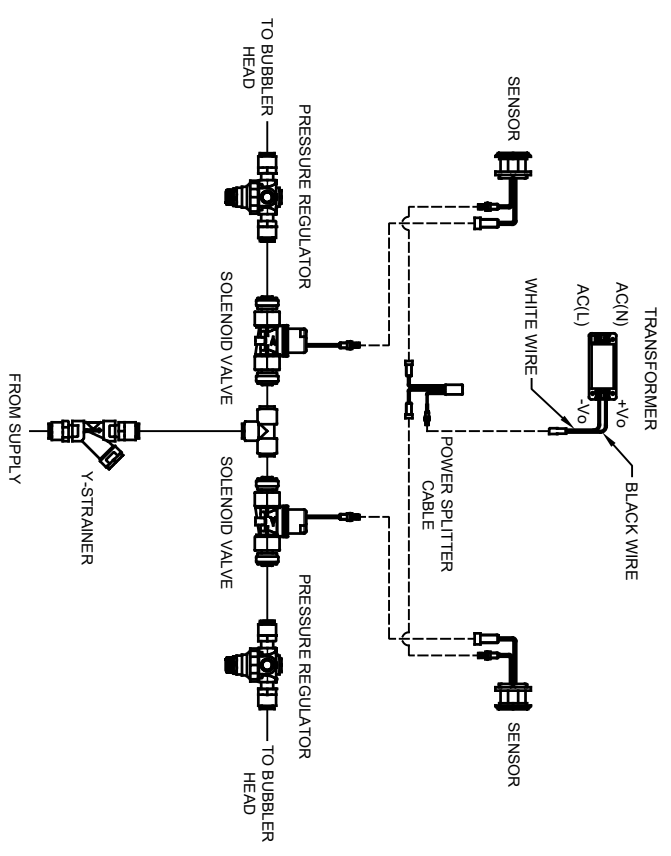




SENSOR WIRING / SUPPLY PLUMBING SCHEMATIC




Haws

1456 KLEPPE LANE
SPARKS, NEVADA, 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO. REVISED PERBY:	MODEL(S)	1011HO/1011HO2/1011HPSHO/1011HPSHO2
5579	ECN: 5978	DP
DATE: 09/15/20	CHKD:	
FV	FV	
APPROVED: BJM	SCALE: 1:1	DRAWING TYPE: INSTALLATION
DATE: 04/23/21	SIZE: A	SHEET: 2 OF 2
		REVISION: 2
		PART NUMBER: 0510001066.D

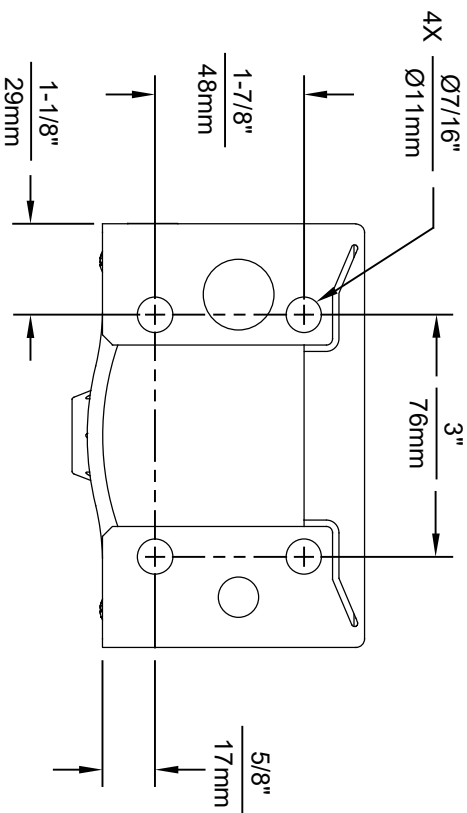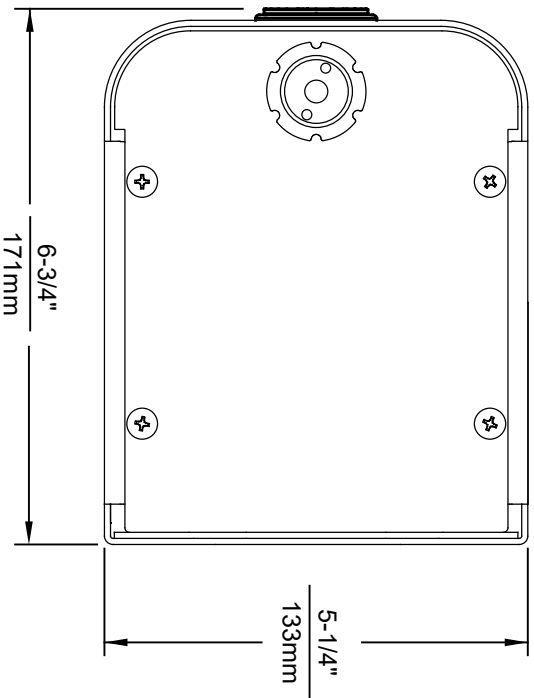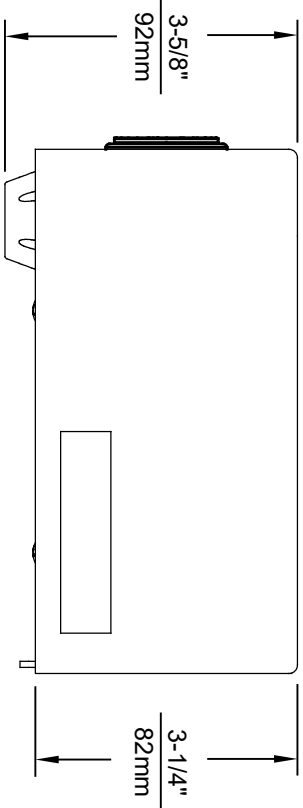

1920HO SERIES MOUNTING HOLE LOCATIONS
(3/8\"-16 UNC MOUNTING HARDWARE NOT SUPPLIED)

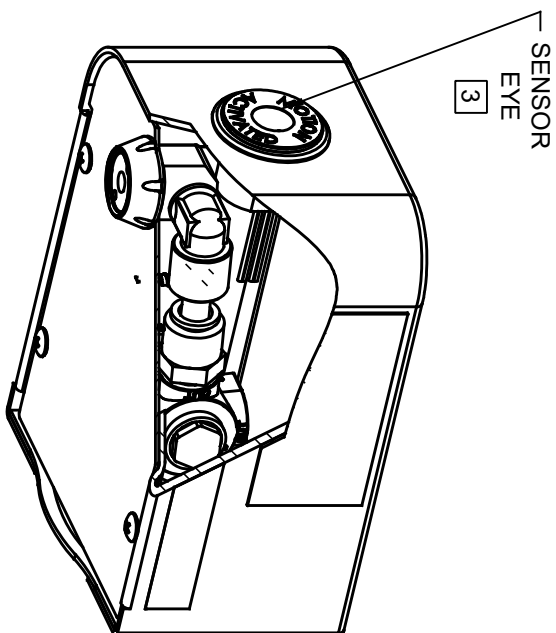

NOTES:

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACKPANELS
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE AND SUPPLY REQUIREMENTS OTHER THAN SHOWN.
3. REFER TO 1RKHO.H OPERATION & MAINTENANCE INSTRUCTIONS FOR SENSOR SETUP.





Haws

1459 KLEPPE LANE
SPARKS, NEVADA, 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM


ECN NO. 5574	REVISION PER BY: FV	DATE: 08/18/20	MODEL(S) 1920HO/1920HPPSHO/1920WH0	PART NUMBER 0510001063.D
ECN NO. 5681	REVISION PER BY: FV	DATE: 05/12/21	SCALE: N/A	INSTALLATION: SHEET 1 OF 6
APPROVED: BJM	DATE: 05/12/21	SCALE: N/A	DRAWING TYPE:	REVISION: 4

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

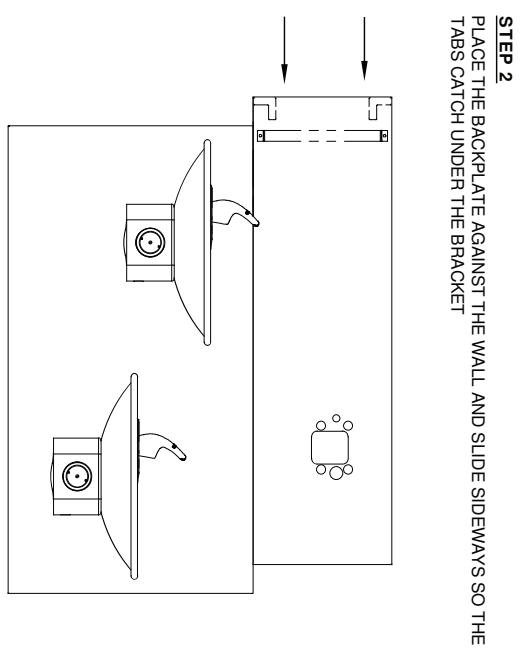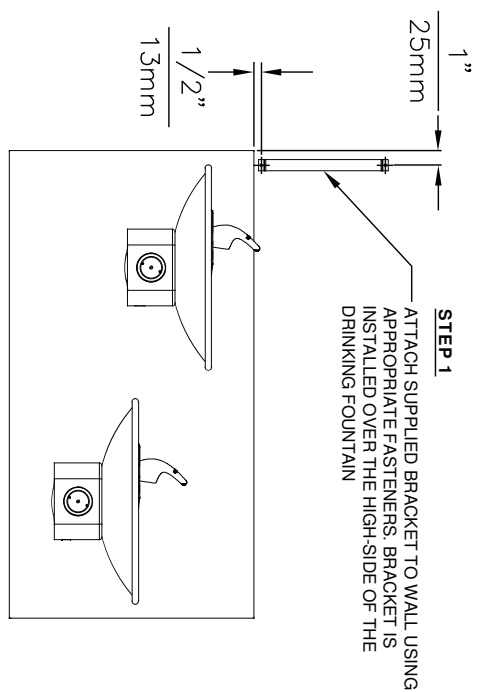

STEP 3
INSTALL THE BOTTLE FILLER PER THE INSTRUCTIONS SUPPLIED WITH THE UNIT

NOTES:
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO.

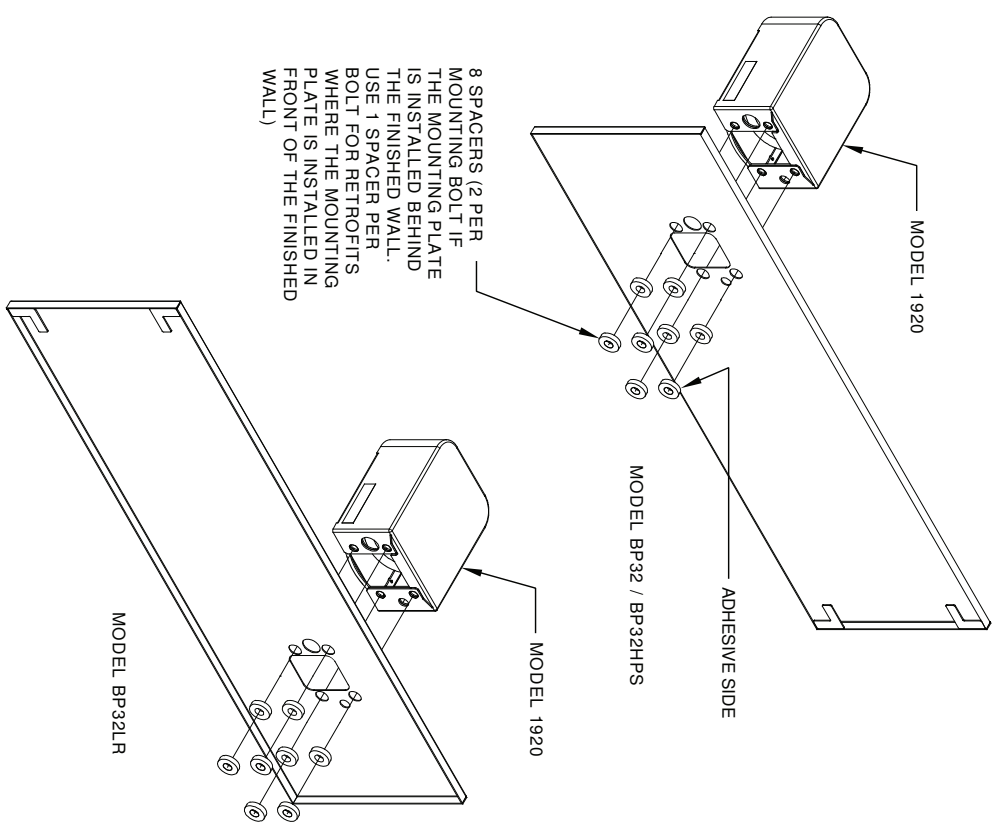


INSTALLATION OVER DOUBLE FOUNTAIN
SHOWN FROM REAR

1455 KILPERE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

EQ'NO	REVISED	REF BY	DATE	MODEL(S)
DRAWN	ENGR	CHK'D	DATE	DRAWING, BACK PANEL SPACER INST, BF
MA		FV	02/02/17	
APPROVED:			DATE:	SCALE: 1:1
FV			02/27/17	DRAWING TYPE: INSTALLATION
				SIZE: A
				SHEET 2 OF 2
				REVISION 2
				PART NUMBER 0310000493.D

©2017 Haws Corporation - All Rights Reserved. HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.


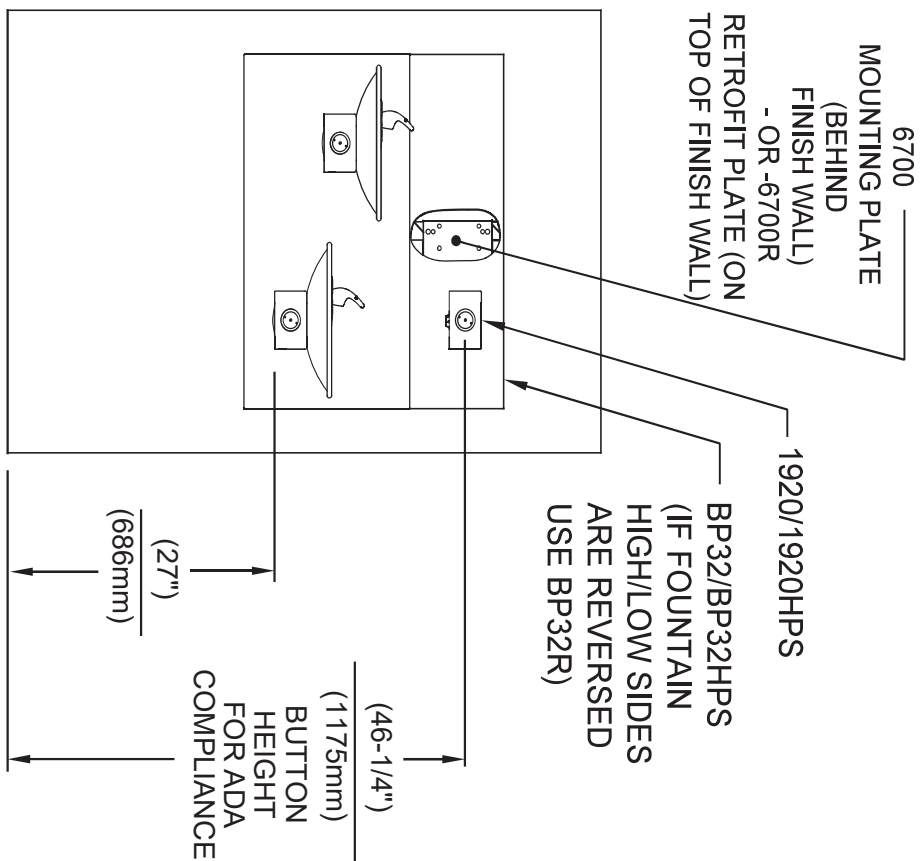


INSTALLATION ABOVE HAWS 1011, 1011HPS, 1011HPSMS, 1011MS, H1011.8, H1011.8HO, H1011.8HPS

* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACKPANELS

2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

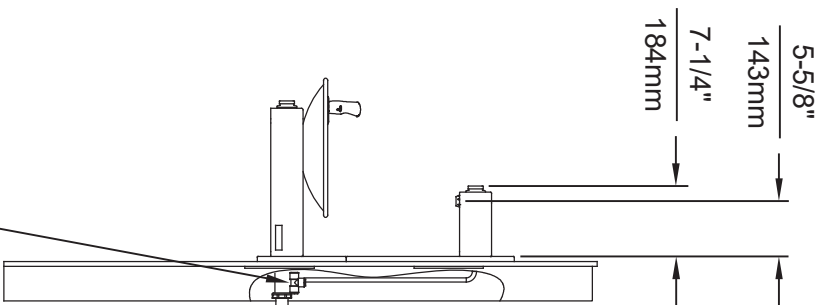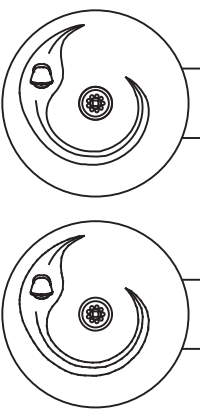

3/8" O.D. SUPPLY TUBING AND 3/8" O.D. PUSH-IN TEE SUPPLIED. (CONNECT TO FOUNTAIN SUPPLY LINE)

Haws

1456 KLEPPE LANE
 SPARKS, NEVADA 89431
 (775) 359-4712 FAX (775) 359-7424
 E-MAIL: HAWS@HAWS.CO.COM
 WEBSITE: WWW.HAWS.CO.COM

EQ. NO.	REVISED PER BY	MODEL(S)
5081	EQ. 5850	1011-1920
DRAWN	DATE	DATE
1	01/15/07	05/14/20
APPROVED:	DATE	SCALE: N/A
F.V.	05/14/20	DRAWING TYPE: INSTALLATION
		SIZE: A
		SHEET 2 OF 6
		REVISION
		6