

model 1107LHO-1920HO

ADA Vandal-Resistant Low Profile Motion-Activated Fountain and Bottle Filler

FEATURES & BENEFITS

CONSTRUCTION

One-piece stamped basin with low-profile design made of 14-gauge Type 304 stainless steel with integral 1/4" (.6 cm) mounting plate, and vandal-resistant bottom plate. Satin finish resists stains and corrosion.

BOTTLE FILLER

14-gauge Type 304 stainless steel bottle filler housing with touchless operation and 1 gpm (3.78 L) laminar flow with 30-second obstruction time-out.

VANDAL RESISTANT

The bubbler head, sensor, drain strainer and bottom plate are locked in place, discouraging unwanted vandal tampering, and 30-second obstruction time-out to reduce tampering of sensor.

BUBBLER HEAD

Polished chrome-plated brass bubbler head with integral 11/16" dia. basin shank and stainless anti-rotation roll pin for vandal resistance strength. Shielded, angled stream opening provides a steady, sanitary source of drinking water at .45 gpm.

FOUNTAIN VALVES

Fountain incorporates touchless sensor operated stainless steel solenoid valves controlled by a transformer for hands-free operation. A pressure regulator is used to adjust the bubbler flow according to incoming water pressures.

ACCESS

Low-prole designed bowl and integral trap allow for knee clearance for adult or child ADA access (when installed at appropriate heights).

OPTIONS

For more information, visit www.hawsco.com or call (888) 640-4297.



REQUIRED MODELS

1107LH0 / BP7 / 1920H0 / BP15

Order these items to make up the Model 1107LHO- 1920HO fountain with stainless steel back panel, bottle filler with stainless steel back plate.


FOR INDOOR USE ONLY


SPECIFICATIONS


Model 1107LHO-1920HO wall-mounted vandal-resistant ADA motion activated drinking fountain and bottle filler shall include a 14-gauge Type 304 Stainless Steel satin-finish basin with integral 1/4" stainless steel mounting plate, 14 gauge bottle filler bracket, touchless sensor operated solenoid valves with 30-second obstruction time-out controlled by a transformer, 100% lead-free waterways, polished chrome plated brass vandal-resistant bubbler head, 1 gpm (3.78 L) laminar flow bottle filler, polished chrome-plated brass vandal-resistant waste strainer, vandal-resistant bottom plates, and 1-1/4" NPT integral trap. Unit can be mounted to meet ADA or Child ADA specifications. Manufactured to be lead-free by all known definitions including NSF/ANSI/CAN 61-Section 9, NSF/ANSI/ CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and 116876 (AB 100) "NSF/ANSI/CAN 61: Q \leq 1".

The botte filler requires a mounting plate; either the Haws model 6700 in-wall or the 6700R on-wall support plate.




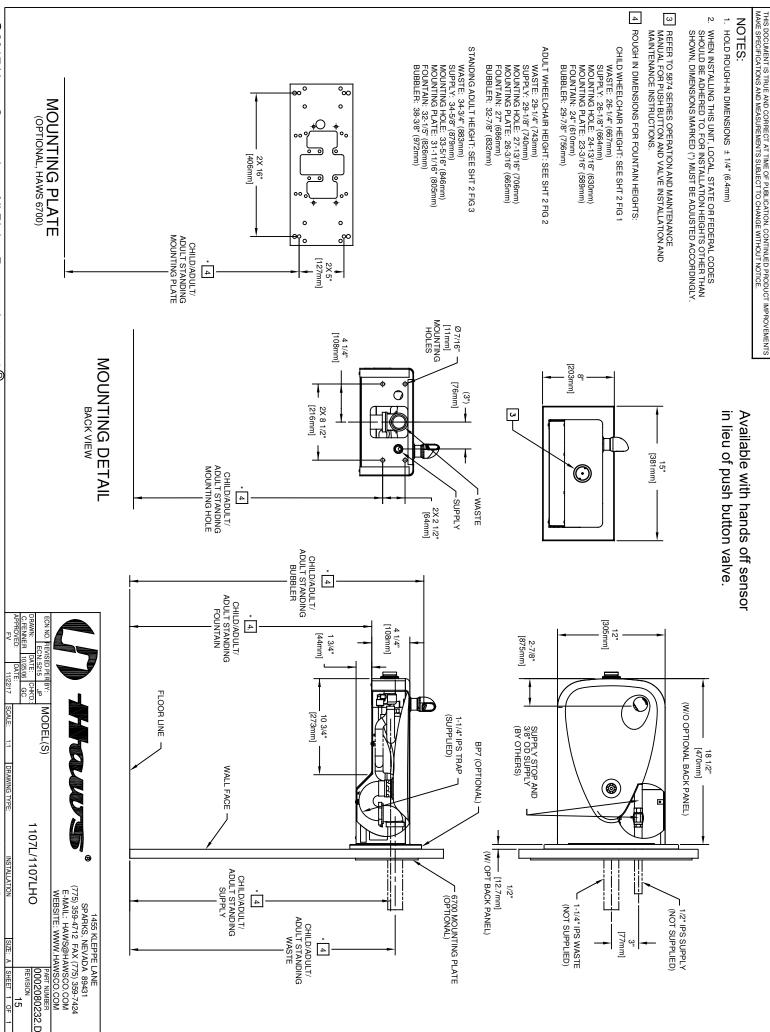

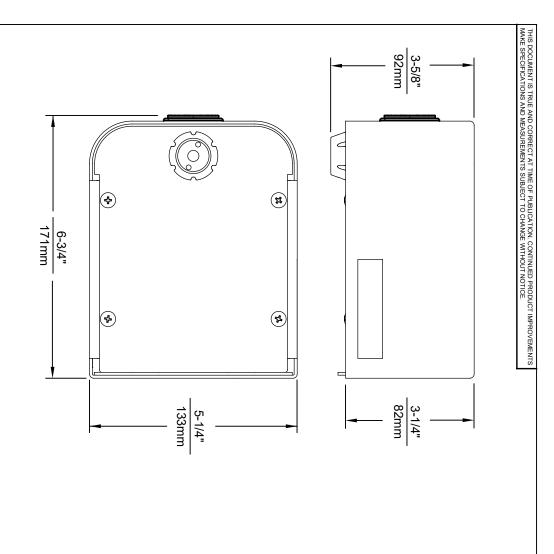

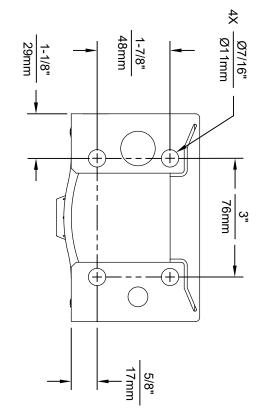

1920HO SERIES MOUNTING HOLE LOCATIONS (3/8"-16 UNC MOUNTING HARDWARE NOT SUPPLIED)

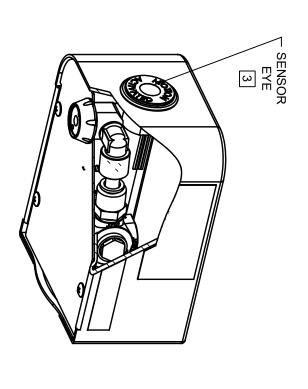

NOTES:

- SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACKPANELS
- 2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE AND SUPPLY REQUIREMENTS OTHER THAN SHOWN.
- [3] REFER TO 1RKHO.H OPERATION & MAINTENANCE INSTRUCTIONS FOR SENSOR SETUP.



