



INSTALLATION:

1. ON AN 1107 OR 1117 SERIES FOUNTAIN, REMOVE THE FOLLOWING:
 - BOTTOM PLATE W/ SCREWS (NEEDS 5/32" PINNED HEX KEY)
 - P-TRAP BEND (NEEDS WRENCH)
 - 1-5/8" DRAIN STRAINER NUT (NEEDS WRENCH)
 - BRASS & RUBBER DRAIN WASHERS
 - DRAIN STRAINER
2. PLACE THE BOTTLE STAND BASE AS SHOWN OVER THE STRAINER HOLE, THEN RE-INSERT THE STRAINER, ROTATING IT SO A DRAIN OPENING FACES THE FRONT.
3. REINSTALL THE DRAIN WASHERS AND THE STRAINER NUT (FINGER-TIGHT ONLY HERE).
4. INSTALL THE BOTTLE STAND PLATFORM WITH THE 4 SUPPLIED FLAT SCREWS (NEEDS 3/32" HEX KEY). ADJUST THE ROTATION OF THE BOTTLE STAND AS NEEDED FOR BEST FIT, THEN FULLY TIGHTEN THE STRAINER NUT.
5. REASSEMBLE THE REMAINDER AND CHECK FOR LEAKS.

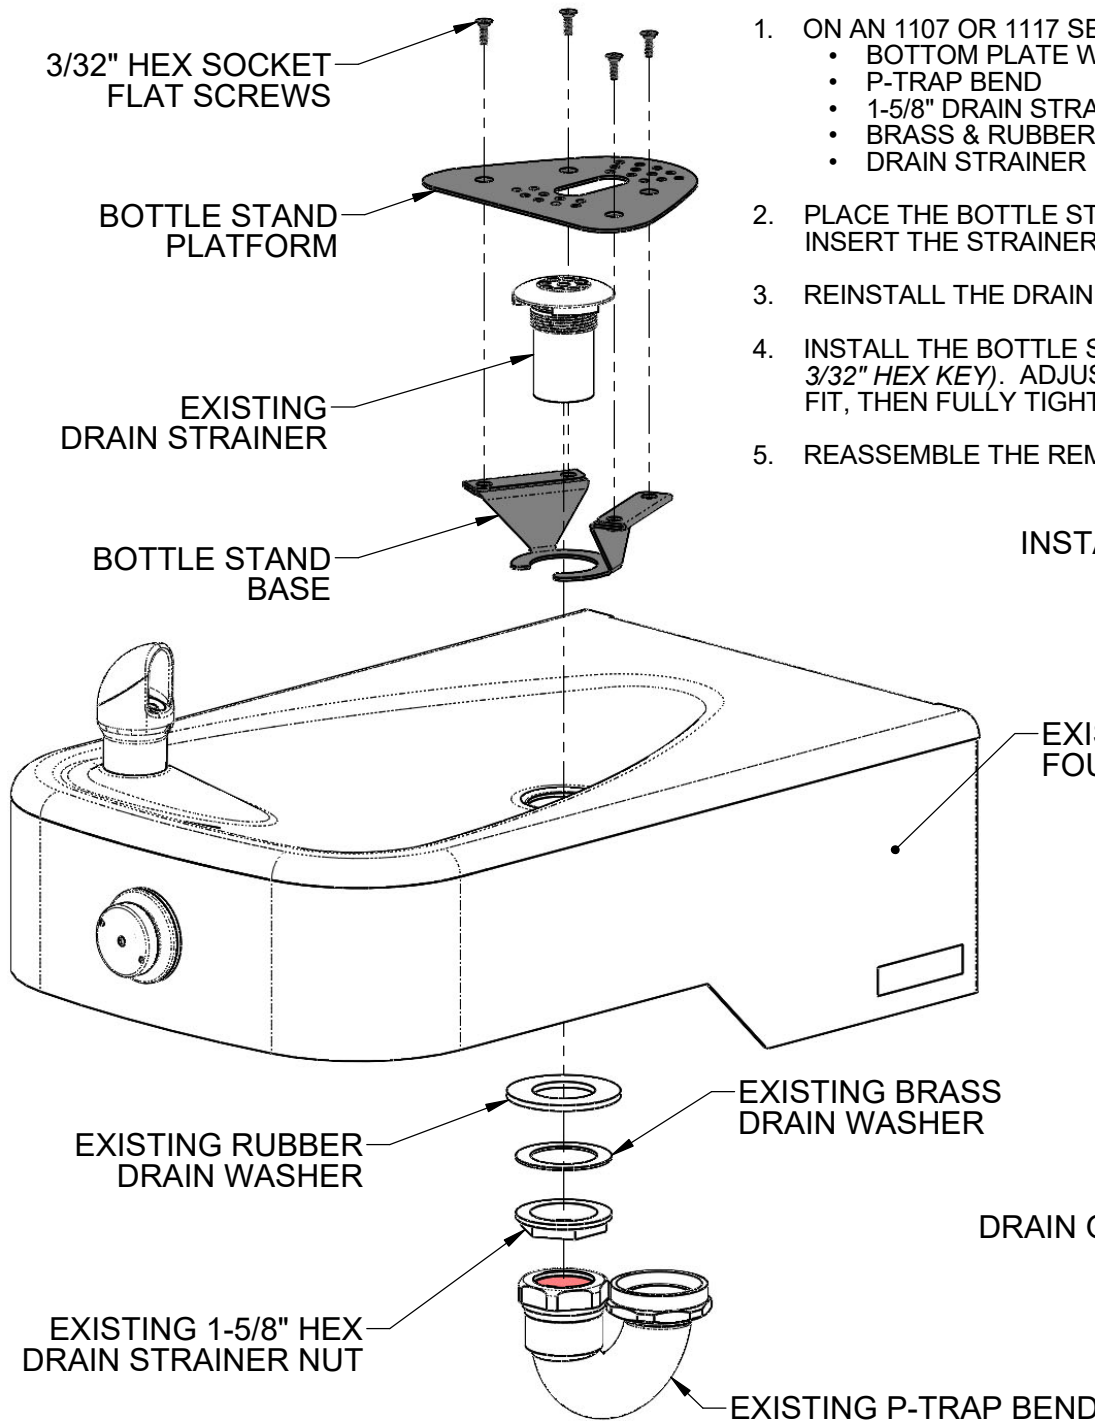

INSTALLED BOTTLE STAND

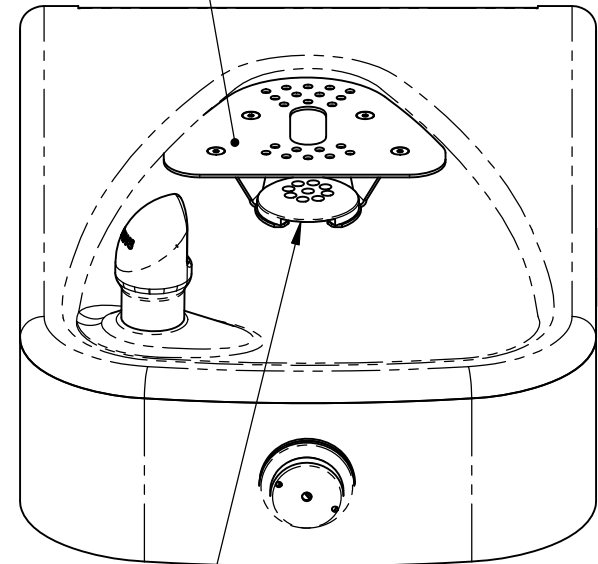

EXISTING FOUNTAIN

DRAIN OPENING IN STRAINER

EXISTING BRASS DRAIN WASHER

EXISTING RUBBER DRAIN WASHER

EXISTING 1-5/8" HEX DRAIN STRAINER NUT

EXISTING P-TRAP BEND

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSO.COM WEBSITE: WWW.HAWSO.COM	
		ECN: 5784 REV. ECN: 6148 DRAWN: JL APPROVED: FV	BY: JG CHKD: JG DATE: 01/27/22 DATE: 02/18/25
© 2025 Haws Corporation - All Rights Reserved. HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.		SCALE: 1:4 DRAWING TYPE: INSTALLATION SIZE: A	SHEET 1 OF 1