

## FEATURES & BENEFITS

### CONSTRUCTION

One-piece drinking fountain with low-profile design made of 14 gauge Type 304 stainless steel with 1/4" (.6 cm) thick stainless back plate welded in, and vandal-resistant stainless bottom plate. Satin finish resists stains and corrosion.

### ACCESS

Low profile designed bowl and integral trap allow for knee clearance for adult or child ADA access (when installed at appropriate heights).

### BUBBLER HEAD

Polished chrome-plated brass bubbler head with integral 11/16" dia. basin shank and stainless anti-rotation roll pin for vandal resistance strength. Shielded, angled stream opening provides a steady, sanitary source of drinking water at .45 gpm.

### FOUNTAIN VALVE

The push-button activated valve offers the only all stainless steel valve body that is machined out of solid bar stock, is fully serviceable through the front of the push button assembly offering access to the water control cartridge and integral water supply strainer, and with front access to the water stream height adjustment for easy maintenance without having to remove the valve. Operating pressure range of 30 to 90 psi (2.1 to 6.2 bar).

### INTEGRATED TRAP

All cast brass 1-1/4" NPT adjustable trap completely concealed inside bottom plate for easy installation and access.

## OPTIONS

- Water Filter: Model 6480 filter kit with 3000 gallon carbon block filter, filter head, and mounting bracket.
- Back Panel: Model BP7 decorative 15" x 9" (38 x 23 cm) satin stainless steel panel.
- Support Frame: Model 6800 In-wall floor mounted fixture support legs, welded steel 4-bolt floor flanges, and supplied with 'U' bolts and hardware.

For more information, visit [www.hawscow.com](http://www.hawscow.com) or call (888) 640-4297.



## SPECIFICATIONS

Model 1107 wall mounted vandal-resistant, barrier-free drinking fountain shall include a 14 gauge Type 304 Stainless Steel satin finish basin with integral 1/4" (.6 cm) thick stainless steel back plate, push-button operated stainless steel valve with front-accessible cartridge, in-line strainer and flow adjustment provides 100% lead free waterways, polished chrome-plated brass vandal-resistant bubbler head, polished chrome-plated brass vandal-resistant waste strainer, stainless steel satin finish back panel, vandal-resistant stainless bottom plate, and a 1-1/4" NPT concealed all cast-brass trap. Unit can be mounted to meet ADA or Child ADA specifications. In extreme environments related to heat and cold, product(s) must be protected from damage/exposure due to these extreme conditions.

## APPLICATIONS

Perfect for either public or private indoor/outdoor settings, the 1107 is a great fit in areas where aesthetics are important to the overall appeal of the architecture. Beautiful satin finish helps to maintain the fountains overall appeal. Specifically, this type of wall mounted drinking fountain may be placed in settings such as: schools and other locations in and around office buildings where the temperature remains above freezing. Model meets all current Federal Regulations for the disabled including those in the Americans with Disabilities Act. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61-Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and 116876 (AB 100) "NSF/ANSI/CAN 61: Q ≤ 1".



NOTES:

1. HOLD ROUGH-IN DIMENSIONS  $\pm 1/4"$  (6.4mm)
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO. FOR INSTALLATION HEIGHTS OTHER THAN SHOWN, DIMENSIONS MARKED (\*) MUST BE ADJUSTED ACCORDINGLY.
3. REFER TO 5874 SERIES OPERATION AND MAINTENANCE MANUAL FOR PUSH BUTTON AND VALVE INSTALLATION AND MAINTENANCE INSTRUCTIONS.

4. ROUGH IN DIMENSIONS FOR FOUNTAIN HEIGHTS:

CHILD WHEELCHAIR HEIGHT: SEE SHT. 2 FIG. 1

WASTE: 26-1/4" (667mm)

SUPPLY: 26-1/8" (664mm)

\*\* FOUNTAIN (ONLY) HOLE: 24-13/16" (630mm)

\*\*\* MOUNTING PLATE HOLE: 23-3/16" (589mm)

FOUNTAIN: 24" (610mm)

BUBBLER: 29-7/8" (756mm)

ADULT WHEELCHAIR HEIGHT: SEE SHT. 2 FIG. 2

WASTE: 29-1/4" (743mm)

SUPPLY: 29-1/8" (740mm)

\*\* FOUNTAIN (ONLY) HOLE: 27-13/16" (706mm)

\*\*\* MOUNTING PLATE HOLE: 26-3/16" (665mm)

FOUNTAIN: 27" (686mm)

BUBBLER: 32-7/8" (832mm)

STANDING ADULT HEIGHT: SEE SHT. 2 FIG. 3

WASTE: 34-3/4" (883mm)

SUPPLY: 34-5/8" (879mm)






\*\* FOUNTAIN (ONLY) HOLE: 33-5/16" (846mm)

\*\*\* MOUNTING PLATE HOLE: 31-11/16" (805mm)

FOUNTAIN: 32-1/2" (826mm)

BUBBLER: 38-9/8" (972mm)

5. MAXIMUM ADJUSTABLE RANGE IS 15" FROM PARALLEL TO BACK WALL.

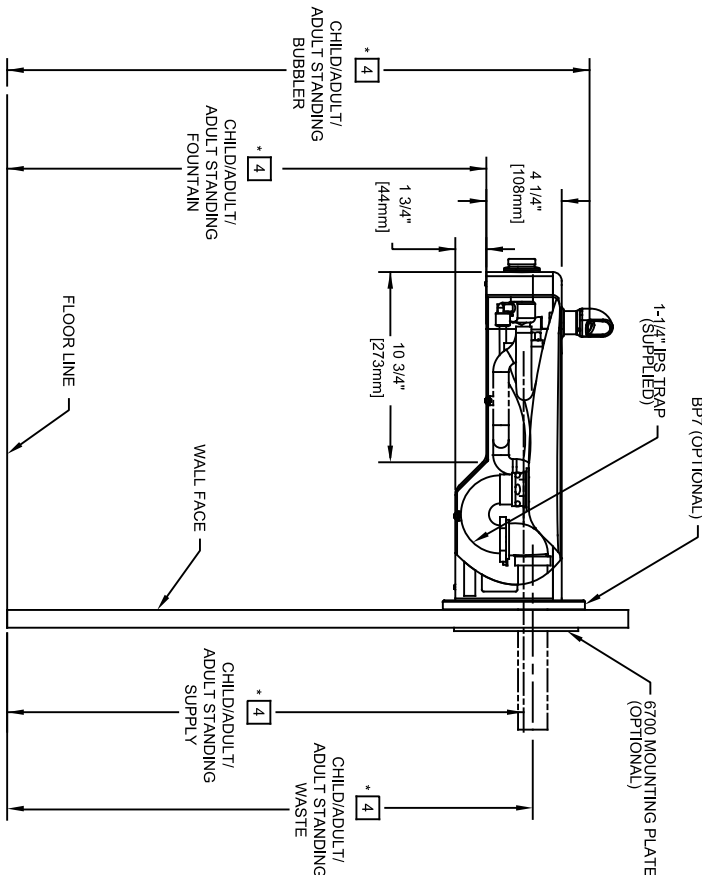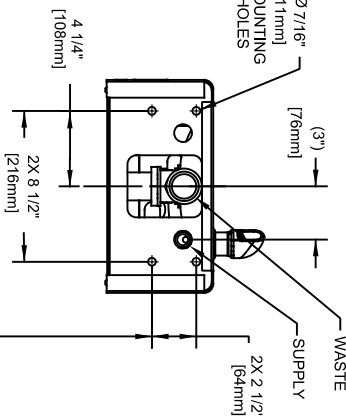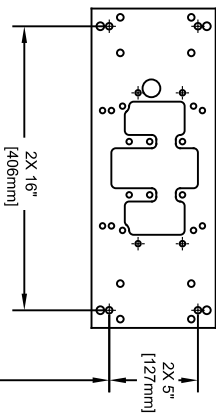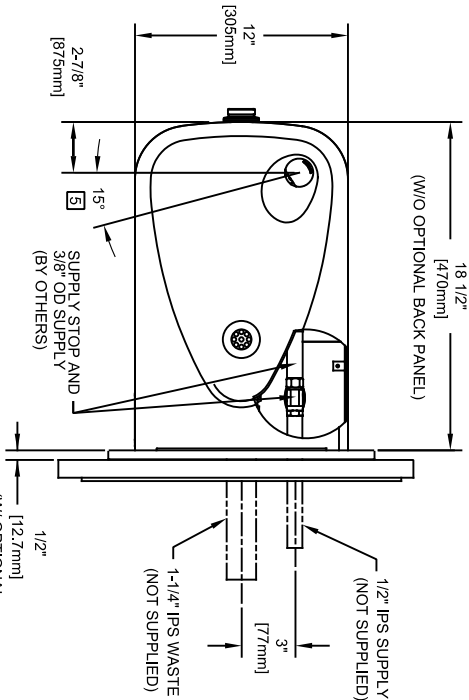

\*\* FOUNTAIN (ONLY) HOLE

LOCATION DETAIL

(FOR USE WITHOUT OPTIONAL MOUNTING PLATE MODEL 6700)

BACK VIEW



ECN NO. REUSED PERBY	MODEL(S)	1107	1455 KLEPPE LANE
DRAWN: ECN 6148 J.G.	DATE: CHD	REVISION	SPARKS, NEVADA 89431
C.FENNER 102506 J.G.	DATE: J.G.	REVISION	(775) 359-4712 FAX (775) 359-7424
APPROVED: FV	DATE: 02/11/25	SCALE: 1:1	E-MAIL: HAWS@HAWS.CO.COM
		DRAWING TYPE: INSTALLATION	WEBSITE: WWW.HAWS.CO.COM
		SIZE: A	PART NUMBER 0002080232 D
		SHEET 1 OF 1	18