

FEATURES & BENEFITS

CONSTRUCTION

Rugged ADA accessible 18-gauge Type 304 Stainless Steel with satin finish bowls, 14 gauge Type 304 Stainless Steel bottle filler that resists stains and corrosion, soft rounded corners, stainless steel satin-finish back panels, vandal resistant bottom plate, and 1-1/4" integral trap.

BOTTLE FILLER

Vandal-resistant, 14-gauge Type 304 stainless steel bottle filler housing with push button operation and 1 gpm (3.78L) laminar flow.

BUBBLER HEADS

Polished chrome-plated brass bubbler heads with integral 11/16" dia. basin shank and stainless anti-rotation roll pin for vandal resistance strength. Shielded, angled stream opening provides a steady, sanitary source of drinking water at .45 gpm.

FOUNTAIN VALVES

The push-button activated valves have all stainless steel bodies, with chrome plated brass push button assemblies which allow for front access to water stream adjustment, water control cartridge, and water supply strainer replacement without having to go through the bottom plate. Operating pressure range of 30 to 90 psi (2.1 to 6.2 bar).

VANDAL RESISTANT

The bubbler heads, push buttons, drain strainers and bottom plates are locked in place, discouraging unwanted vandal tampering.

MOUNTING

Heavy-duty galvanized steel mounting frame provides the sturdy hidden support needed for the Hi-Lo configuration of this unit. Further convenience is given to the chiller with the integral fold-out shelf, along with an in-wall 3/16" thick steel mounting plate for the bottle filler,

OPTIONS

- Water Filter: Model 6480 filter kit with 3000 gallon carbon block filter, filter head, and mounting bracket.
- Mounting Plate: Model 6700R, on-wall mounting plate for model 1920.

For more information, visit www.hawscow.com or call (888) 640-4297.



SPECIFICATIONS


H1119.8 / MTGFR.LG / HCR8 / 6469 / 1920 / 6700 / BP32

Order these items to make up the Model H1119.8-1920 fountain with stainless steel back panel and grille, bottle filler with stainless steel back plate, and remote chiller shown above.


APPLICATIONS

Model H1119.8-1920 vandal-resistant wall-mounted ADA water cooler and bottle filler shall include dual 18-gauge Type 304 Stainless Steel satin-finish basins, 14 gauge bottle filler bracket, 16 gauge galvanized steel in-wall mounting frame with welded-in heavy-duty 10 gauge mounting plate, vandal-resistant push button operated stainless steel valves with front accessible cartridge, in-line strainer and flow adjustment provide 100% lead free waterways, in-wall 3/16" thick steel mounting plate for the bottle filler, polished chrome-plated brass vandal-resistant bubbler heads, 1 gpm (3.78 L) laminar flow bottle filler, polished chrome-plated vandal-resistant waste strainers, vandal-resistant bottom plates, stainless steel satin-finish back panel and louvered intrusion-proof grill, high and low fountain mounting levels, and 1-1/4" NPT traps. The refrigeration system is hermetically sealed and delivers a minimum of 8 gph (30.3 L) of water at 50° F (10° C) cooled from 80° F (26.7° C) inlet water at 90° F (32.2° C) ambient. 115 Volts, 60Hz, rated watts: 370, full load amps: 5. Haws electric water coolers comply with ARI Standard 1010 and ANSI A117.1, and are listed by Underwriter Laboratories to U.S. and Canadian standards. Manufactured to be lead-free by all known definitions including NSF/ ANSI/CAN 61-Section 9, NSF/ANSI/ CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and 116876 (AB 100) "NSF/ANSI/CAN 61: Q ≤ 1".



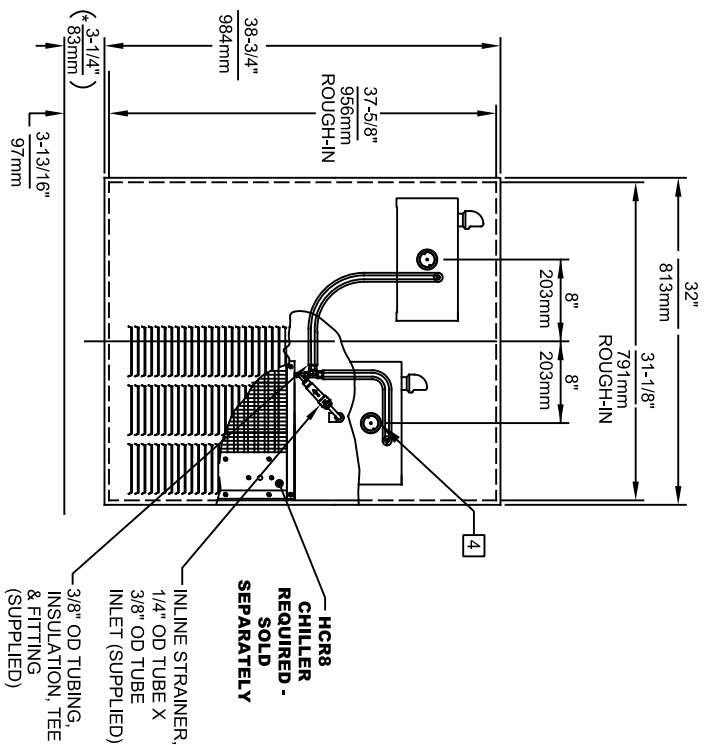

- [illegible]



					
Haws®					
<i>Since 1906</i>					
1455 KLEPPE LANE SPARKS, NEVADA 89431					
(775) 359-4712 FAX (775) 359-7424					
E-MAIL: HAWS@HAWS.CO.COM					
WEBSITE: WWW.HAWS.CO.COM					
ECON NO.	REINSED PERBY:	MODEL(S)			
DRAWN:	JG	CHKD:	JG	1119.8	
F. VASQUEZ	09-01-98	DATE:	JG		
APPROVED:		DATE:	02/1/25		
REV	SCALE:	1:19	DRAWING TYPE:	INSTALLATION	SIZE: A
					SHEET 1 OF 1
					24
				PART NUMBER	0002080262.D
				REVISION	

CALLOUT LEGEND	
A	1/4" OD WATER OUTLET
B	3/8" OD WATER INLET
C	TEMPERATURE CONTROL
D	JUNCTION BOX
E	ELECTRICAL WIRING OPENING

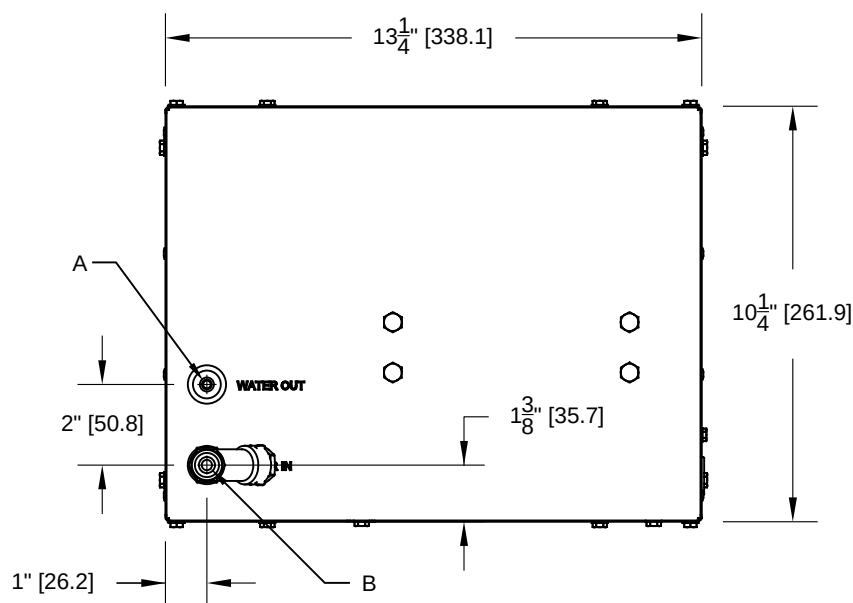


FIG. 2

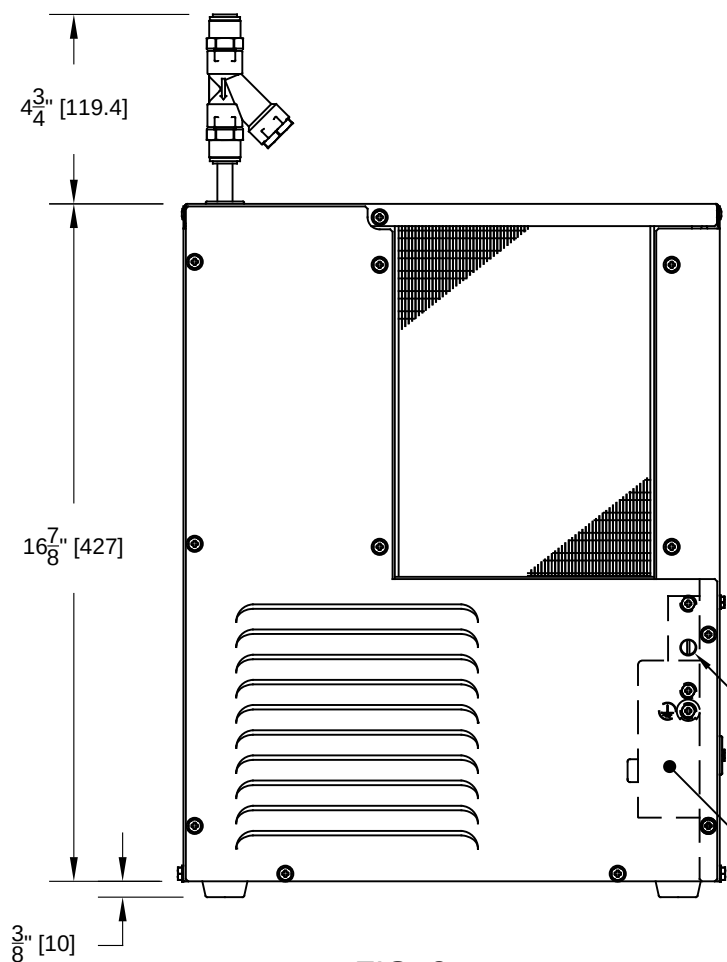


FIG. 3


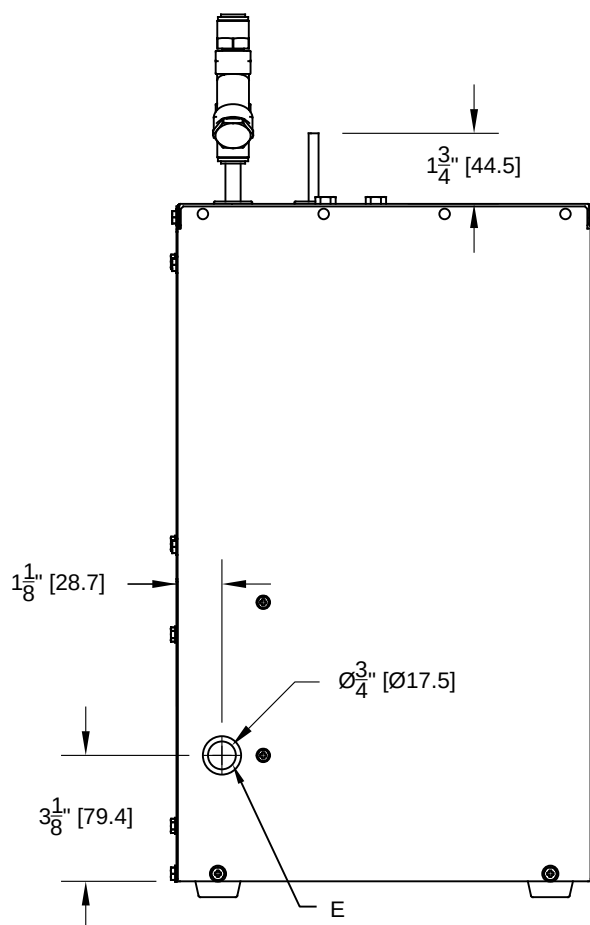


FIG. 4



		Haws®		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		ECN NO. 4997 ECN: 5401 DATE 01/25/16 DATE 02/05/19		MODEL(S) HCR8 REMOTE CHILLER	
DRAWN VWC APPROVED JL		REVISION 4		PART NUMBER 0580000134.D	
SCALE: NA		DRAWING TYPE: INSTALLATION		SIZE: A	
SHEET 1 OF 2		SHEET 1 OF 2		SHEET 1 OF 2	

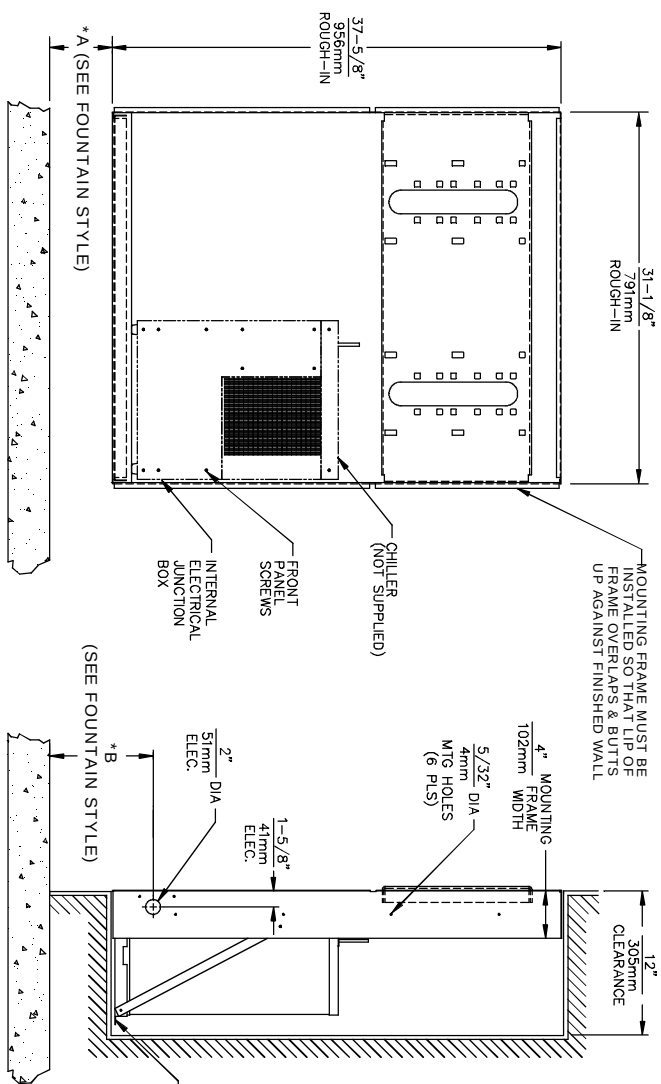

- CHILLER ELECTRICAL INSTALLATION**
1. ENSURE ELECTRICAL POWER IS OFF AND POWER MATCHES VOLTAGE, PHASE AND CYCLE LISTED ON CHILLER LABEL.
 2. REMOVE FRONT PANEL TO GAIN ACCESS TO INTERNAL JUNCTION BOX.
 3. HARDWIRE CHILLER THROUGH ITS SIDE. WIRE IN ACCORDANCE WITH LOCAL, STATE OR FEDERAL CODES.
 4. REPLACE FRONT PANEL. DO NOT APPLY POWER UNTIL WATER SUPPLY IS CONNECTED AND ON.


MOUNTING FRAME INSTALLATION

1. THIS FRAME IS USED WITH SEVERAL DIFFERENT MODELS. SEE INSTALLATION INSTRUCTIONS RECEIVED WITH THE FOUNTAIN FOR PROPER LOCATIONS OF 5/16"-18 PANEL NUT RETAINERS. FOR ROUGH-IN USE THE APPROPRIATE DIMENSIONS SHOWN ABOVE. WASTE AND SUPPLY HEIGHTS ARE ALSO DETAILED ON THE FOUNTAIN INSTALLATION INSTRUCTIONS.
2. HOLD ROUGH-IN DIMENSIONS $\pm 1/8"$ (3.2mm).
3. WHEN INSTALLING THIS UNIT LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO. FOR DIFFERENT INSTALLATION HEIGHTS, OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY.
4. ALIGN HOLES IN CHILLER SUPPORT TRAY WITH HOLES IN FRAME AND FASTEN IN PLACE WITH #10 SHEET-METAL SCREWS SUPPLIED WITH UNIT.
5. FOUNTAIN REMOVAL: FIRST REMOVE SCREWS AND THEN SQUEEZE CLIPS ON NUT RETAINER TO POP OUT. INSTALL IS REVERSE OF REMOVAL.
6. HOLE COMBINATION SHOWN ABOVE IS FOR USE WITH LOW FOUNTAIN ON THE RIGHT AND HIGH FOUNTAIN ON THE LEFT. USE OPPOSITE HOLES FOR HIGH ON RIGHT AND LOW ON LEFT.
7. IMPORTANT: A L.H. LOW (OPTIONAL) CONFIGURATION WILL REQUIRE A DIFFERENT BACK PANEL AND THE WASTE AND SUPPLY DIMENSIONS SHOWN (*) MUST BE REVERSED.

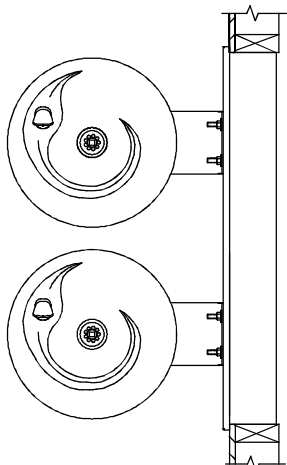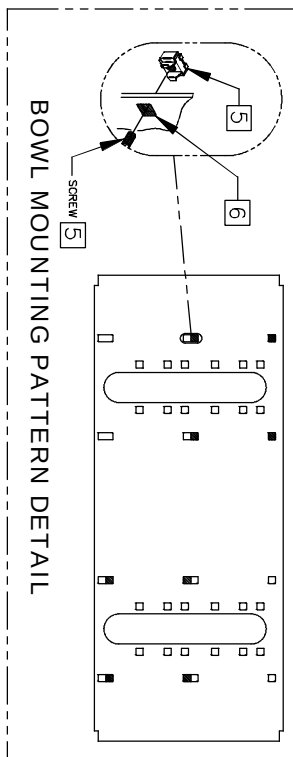

* IF YOUR FOUNTAIN IS THIS STYLE
USE THESE DIMENSIONS

A	B
2-1/4" (57mm)	5-3/4" (146mm)

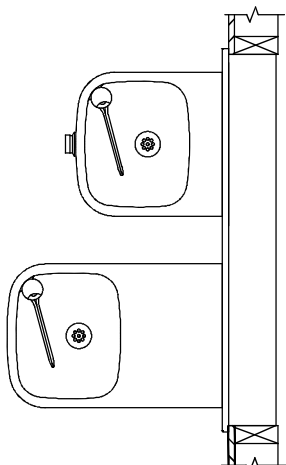

* IF YOUR FOUNTAIN IS THIS STYLE
USE THESE DIMENSIONS

A	B
3-15/16" (100mm)	7-7/16" (189mm)

Haws Corporation

INFO FAX : 1-888-FAX-HAWS (1-888-329-4297)

1455 Kleppe Ln, Sparks, NV 89431

Phone: 775-359-4712 Fax: 775-359-7424

Haws Ag Bochemweg 3 CH-3401 Burgdorf, Switzerland

Haws Wfg Pte Ltd 74 Sungai Kadut Loop Singapore 729531

e-mail: Haws@hawsco.com website: www.hawsco.com

FOR YOUR INFORMATION: 0002080318

DATE: 06/97

SCALE: 1:10

DRAWING TYPE: INSTALLATION/FABRACK

SIZE: A 1 of 1

1920 INDEX

INSTALLATION WITH:	TYPICAL USES	SEE SHEET...
1001/1011 BOWLS	HAWS SERIES 1001, H1001.8X, 1011, 1011.8X STYLE FOUNTAINS	3 OF 9
1109/1119 BOWLS		4 OF 9
1107/1117 BOWLS		5 OF 9
1311/1501 BOWLS		6 OF 9
1047		7 OF 9
6468		8 OF 9
CHILD HEIGHT	HAWS 1107P STD CONFIG CHILD HEIGHT, 1109P STD CONFIG CHILD HEIGHT, 1311P STD CONFIG CHILD HEIGHT	9 OF 9





1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO. REVISED PER BY: J.G.
DRAWN BY: DATE: CHK'D: J.G.
APPROVED: DATE: 11/2/24



MODEL(S)
1920/1920HPS/1920W

PART NUMBER
0510000490.D
REVISION
13

SCALE: N/A DRAWING TYPE: INSTALLATION SIZE: A SHEET 1 OF 9

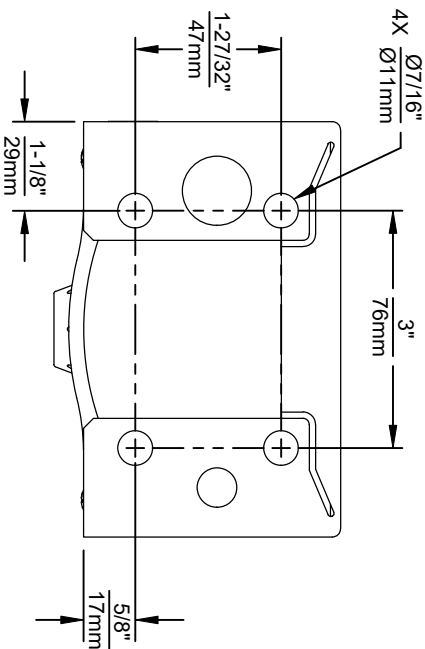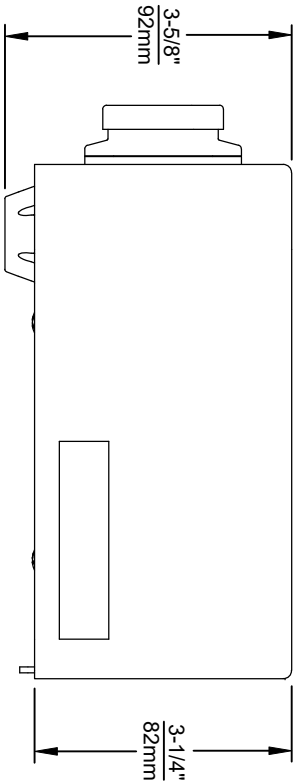

1920 SERIES MOUNTING HOLE LOCATIONS
(3/8"-16 UNC MOUNTING HARDWARE NOT SUPPLIED)

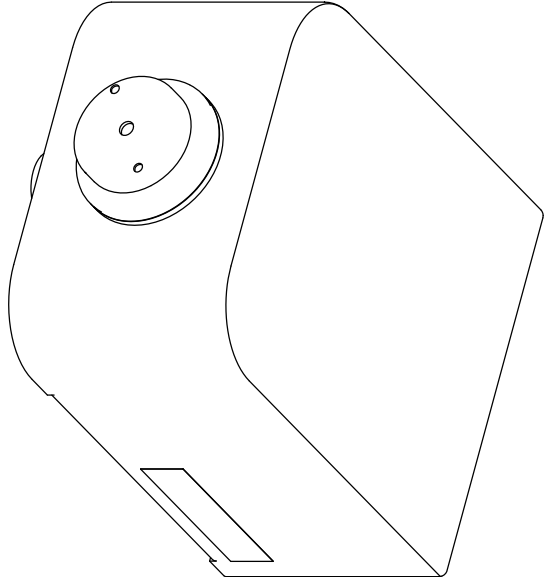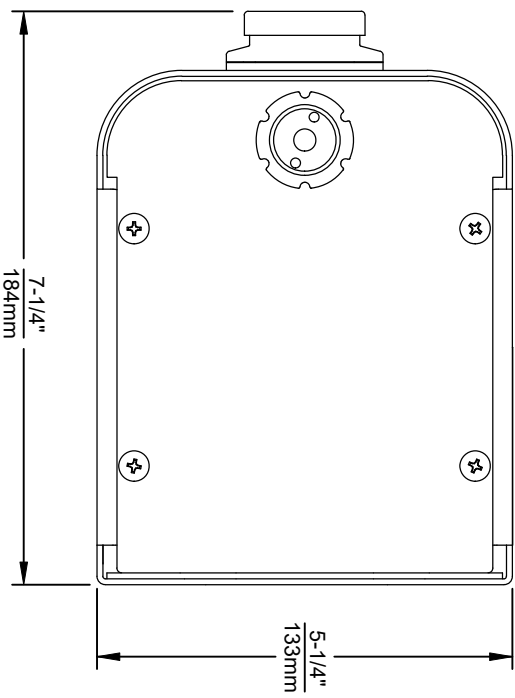

NOTES:

1. SEE SHEETS 2 THRU 7 FOR BOTTLE FILLER ADULT ADA HEIGHT APPLICATIONS AND SHEET 8 FOR CHILD ADA HEIGHT APPLICATIONS.
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.



Haws
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

EON NO. REVISED PER BY:		MODEL(S)	
5041	EON 6131 J.G.	1920/1920HPS/1920W	
DRAWN	DATE	CHKD	
1855/6	J.G.		
APPROVED:		SCALE: N/A	
RH	DATE	DRAWING TYPE	INSTALLATION
	11/2/24		SIZE: A
		SHEET 2 OF 9	

PART NUMBER
0510000490.D

REVISION
13

COUNTING PLATE
(BEHIND
FINISH WALL)

6700R

RETROFIT PLATE

(ON TOP OF
FINISH WALL)

1920

BP32

(IF FOUNTAIN
HIGH/LOW SIDES

ARE REVERSED
USE BP32R)

6469

(47-5/8")

(1210mm)

FOR ADA
COMPLIANCE

6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATTING
(ON TOP OF FINISH WALL)

(BEHIND FINISH WALL)
-OR-
-

6700R RETROFIT PLATE

(ON TOP OF FINISH WALL)

1920

BP15

(47-5/8")

(1210mm)

FOR ADA
COMPLIANCE

(686mm)

A line drawing of the front panel of the device. It features a power switch on the left side and a power jack on the right side. The power jack is labeled with a power symbol and the text 'DC IN'. The power switch is labeled with a power symbol and the text 'POWER'. Arrows point from the text labels to the corresponding components on the front panel.

A schematic diagram of the control panel. It features a power switch on the left, an emergency stop button in the center, and a speed selector knob on the right. Arrows point from the text labels to these components: 'Power switch' to the left switch, 'Emergency stop button' to the center button, and 'Speed selector knob' to the right knob. A separate inset shows a close-up of the speed selector knob with a scale from 0 to 100 and a central dot.

5-5/8"

5-1/4"

1/4"

143mm

7-1/4"

184mm


INSTALLATION ABOVE HAWS 1119 & H1119.8 SERIES

**INSTALLATION ABOVE HAWS 1109 & H1109.8 SERIES
SEE SHEET 8 FOR INSTALLATION AT CHILD HEIGHT**


* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).

2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.


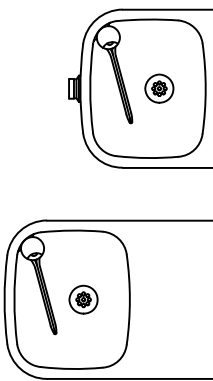


3/8" O.D. SUPPLY TUBING AND 3/8" O.D. PUSH-IN TEE SUPPLIED. (CONNECT TO FOUNTAIN SUPPLY LINE)



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWSCO.COM

MODEL(S)		PART NUMBER	
ECN NO.	ECN REV. PER. BY.	0510000490.D	
5081	ECN 6131		
DRAWN:	DATE:	REVISION	
MM	07/30/17	13	
DATE:	SCALE:	DRAWING TYPE:	SIZE: A
11/26/24	N/A		SHEET 4 OF 9
APPROVED:	INSTALLATION		
RH			

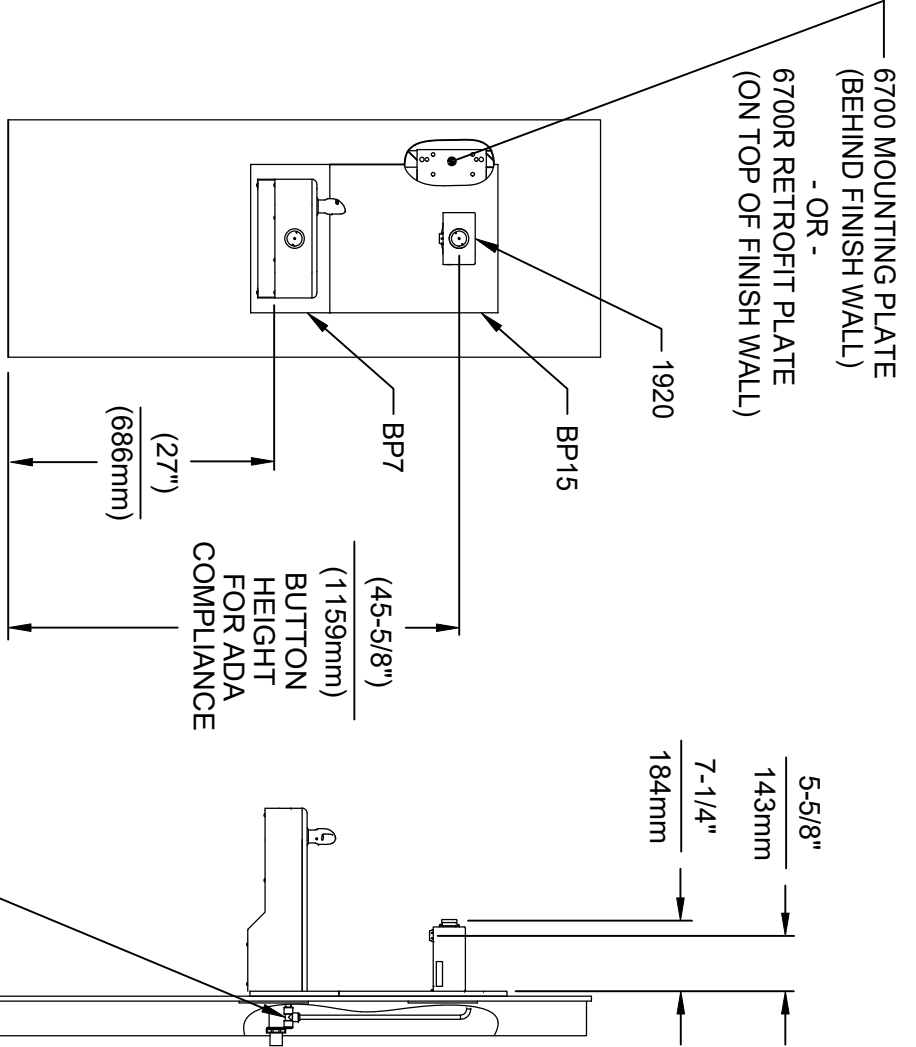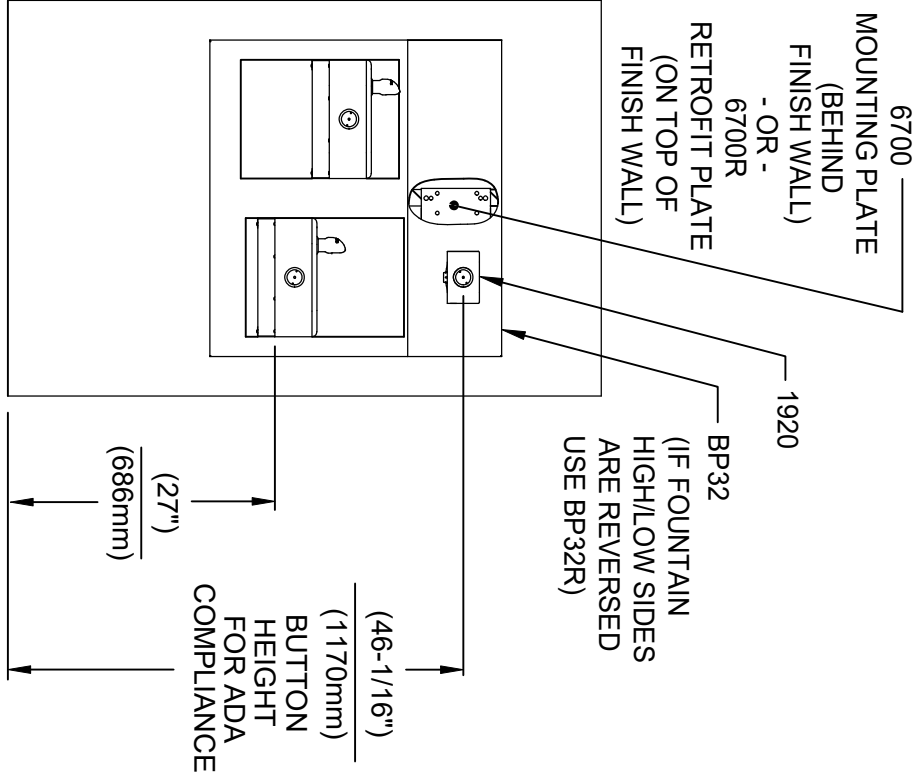


INSTALLATION ABOVE HAWS 1117L & H1117.8 SERIES

**INSTALLATION ABOVE HAWS 1107L & H1107.8 SERIES
SEE SHEET 8 FOR INSTALLATION AT CHILD HEIGHT**

* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).

2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.



3/8" O.D. SUPPLY TUBING AND 3/8" O.D. PUSH-IN TEE SUPPLIED. (CONNECT TO FOUNTAIN SUPPLY LINE)






Haws
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO.	REVISED PER	BY	MODEL(S)
5081	ECN 6131	J.G.	
DRAWN	DATE	CHKD	
W	09/07	J.G.	
APPROVED	DATE		
RH	11/29/24		
SCALE	N/A	DRAWING TYPE	INSTALLATION
SIZE	A	SHEET	5 OF 9

PART NUMBER
0510000490.D
REVISION
13

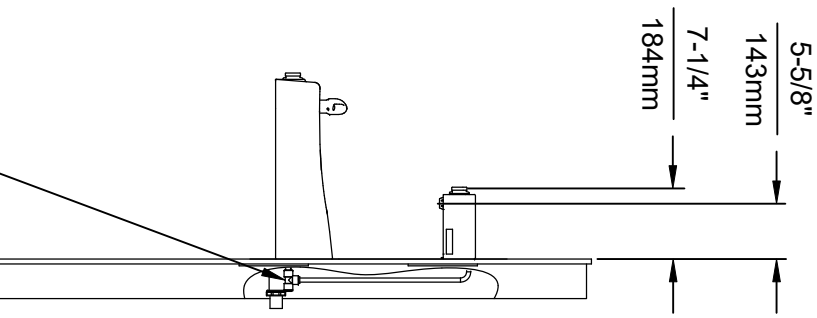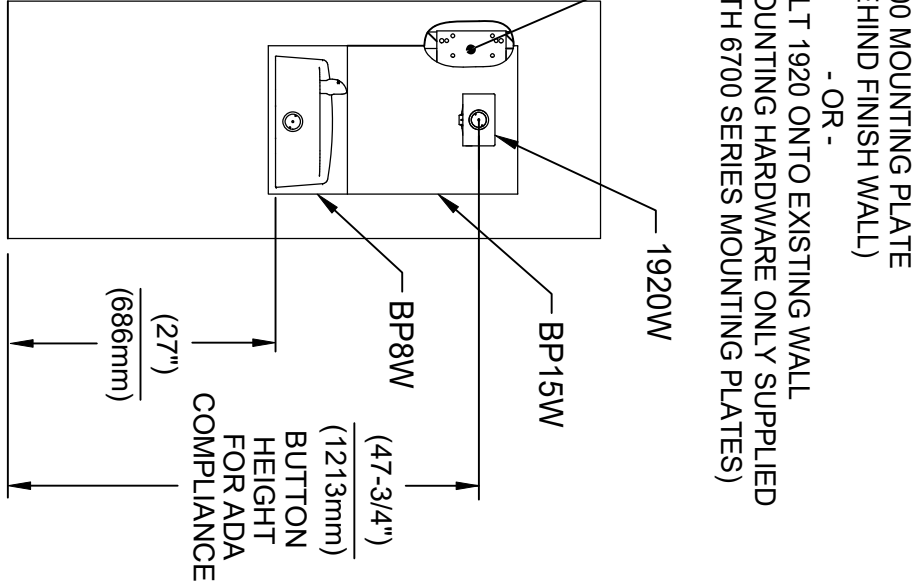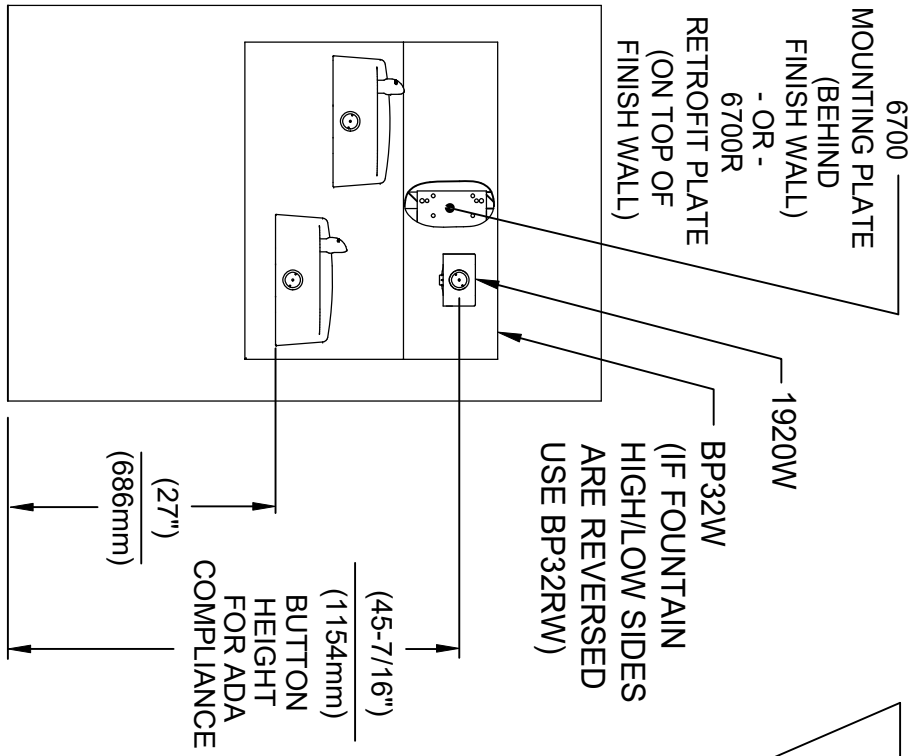


INSTALLATION ABOVE HAWS 1501

**INSTALLATION ABOVE HAWS 1311
SEE SHEET 8 FOR INSTALLATION AT CHILD HEIGHT**

* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

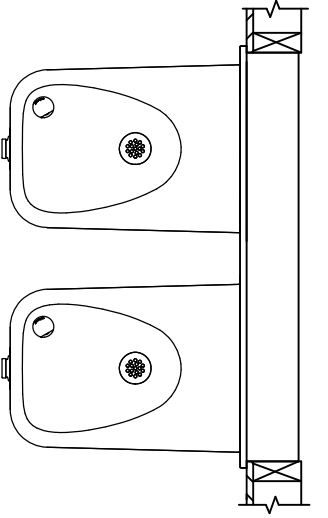

3/8" O.D. SUPPLY TUBING AND 3/8" O.D. PUSH-IN TEE SUPPLIED.
(CONNECT TO FOUNTAIN SUPPLY LINE)




Haws
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO.	REVISED PER BY	MODEL(S)	PART NUMBER
5081	ECN 6131 J.G.	1920/1920HPS/1920W	0510000490.D
DRAWN	DATE	CHKD	REVISION
W	02/25/17	J.G.	13
APPROVED:	DATE	SCALE	SIZE
RH	11/29/24	N/A	A
DRAWING TYPE		INSTALLATION	SHEET 6 OF 9



6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
BOLT 1920 ONTO EXISTING WALL
(MOUNTING HARDWARE ONLY SUPPLIED
WITH 6700 SERIES MOUNTING PLATES)

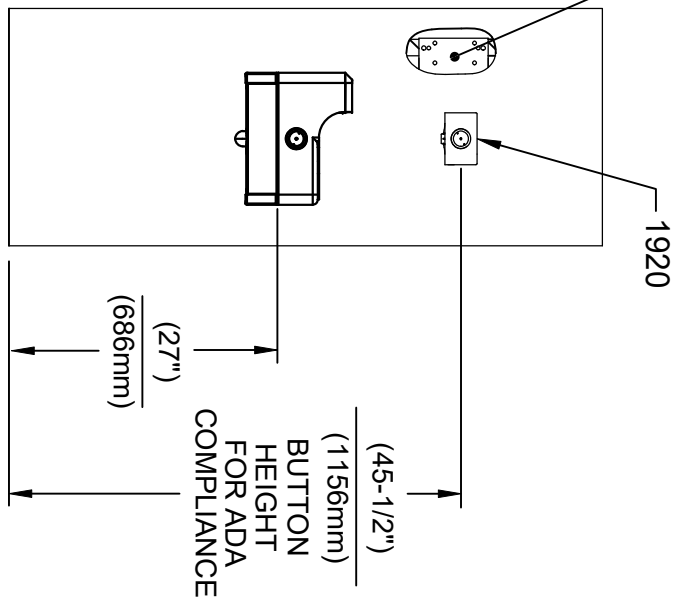


INSTALLATION ABOVE HAWS 1047

* IF YOUR FOUNTAIN IS THIS STYLE USE
THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS
FOR MOUNTING PLATES AND BACK PANELS
(SHOWN FOR REFERENCE - NOT SUPPLIED).
2. WHEN INSTALLING THIS UNIT, LOCAL,
STATE OR FEDERAL CODES SHOULD
BE ADHERED TO FOR INSTALLATION
LOCATIONS, WASTE & SUPPLY
REQUIREMENTS OTHER THAN SHOWN.

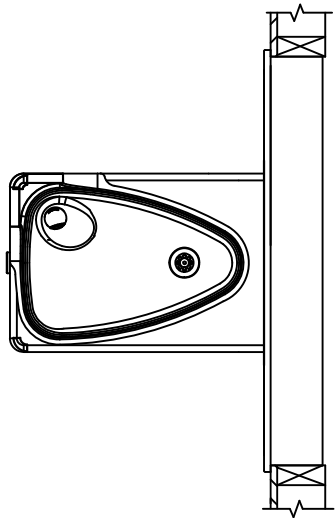

3/8" O.D. SUPPLY
TUBING AND 3/8" O.D.
PUSH-IN TEE SUPPLIED.
(CONNECT TO FOUNTAIN
SUPPLY LINE)

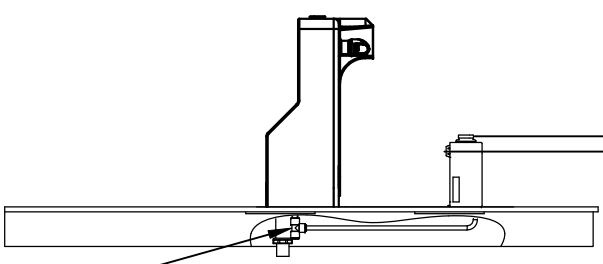




Haws
Since 1906

1455 KLEPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO.	REVISED PER BY	MODEL(S)	PART NUMBER
5220	ECN 6131 J.G.	1920/1920HPS/1920W	0510000490.D
DRW P	DATE	CHG	REVISION
RH	11/29/24	J.G.	13
APPROVED:	SCALE: N/A	DRAWING TYPE: INSTALLATION	SHEET 7 OF 9

* MODELS 1920 (BOTTLE FILLER), BP15, BP6 (BACK PANELS) AND 6468 (WASTE DRIP TRAY) ARE ALL AVAILABLE TOGETHER AS MODEL 1922.

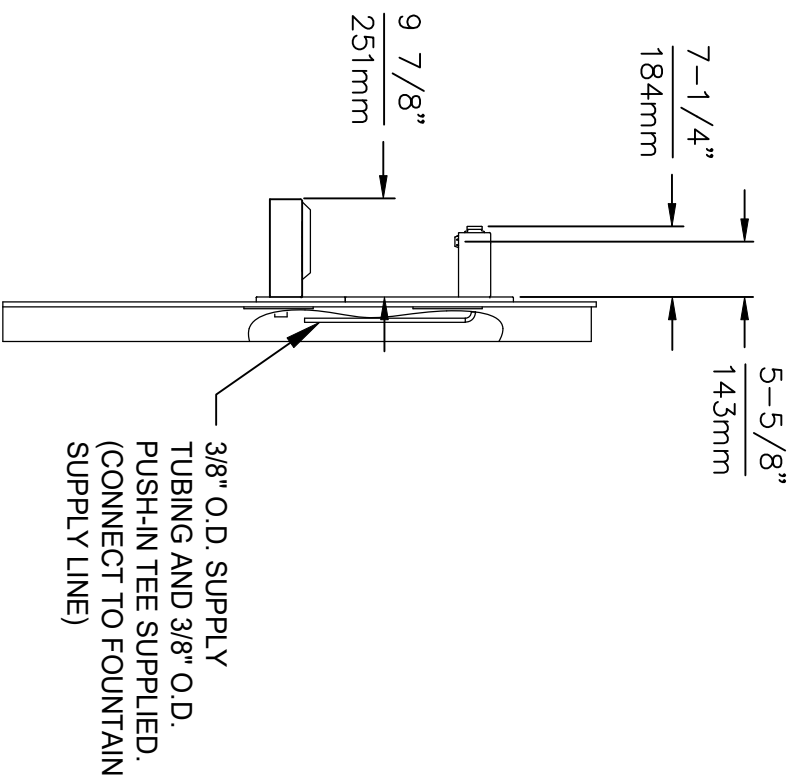

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATE, WASTE DRIP TRAY AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

ECN NO. 5807
 DRAWN: DP
 APPROVED: RH

REVISION: 0510000490.D
 REVISION: 13

RECEIVED PARBY: JG
 DATE: 10/27/00
 DATE: 11/26/04

MODEL(S): 1920/1920HPS/1920W


SCALE: N/A
 DRAWING TYPE: INSTALLATION
 SIZE: A
 SHEET 8 OF 9

PART NUMBER: 13




HAWSCO
 Since 1906

1455 KLEPPE LANE
 SPARKS, NEVADA 89431
 (775) 359-4712 FAX (775) 359-7424
 E-MAIL: HAWSCO@HAWSCO.COM
 WEBSITE: WWW.HAWSCO.COM

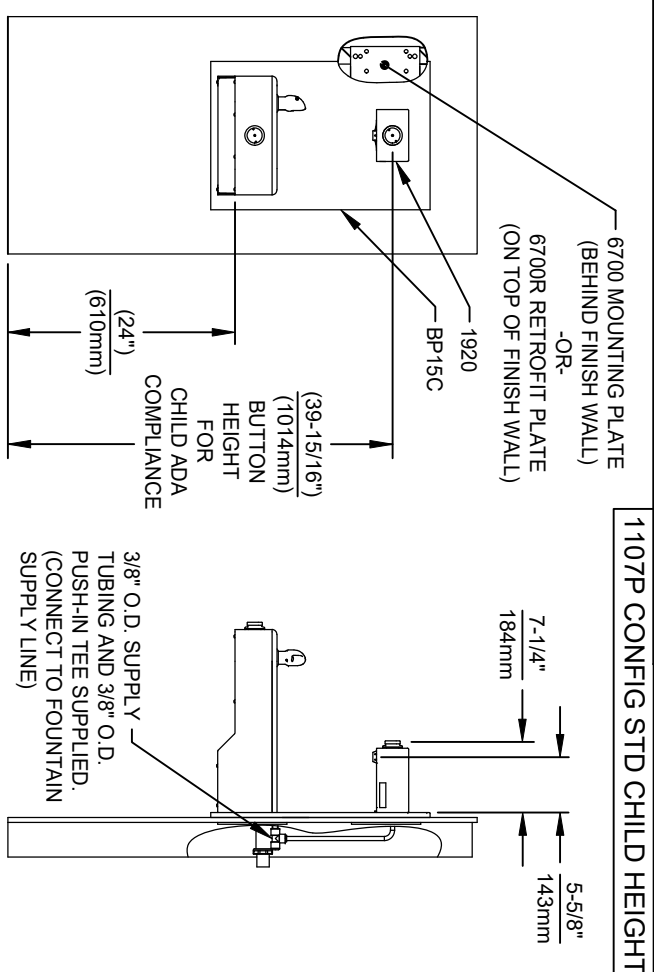


INSTALLATION FOR 1107P CONFIG STD CHILD HEIGHT

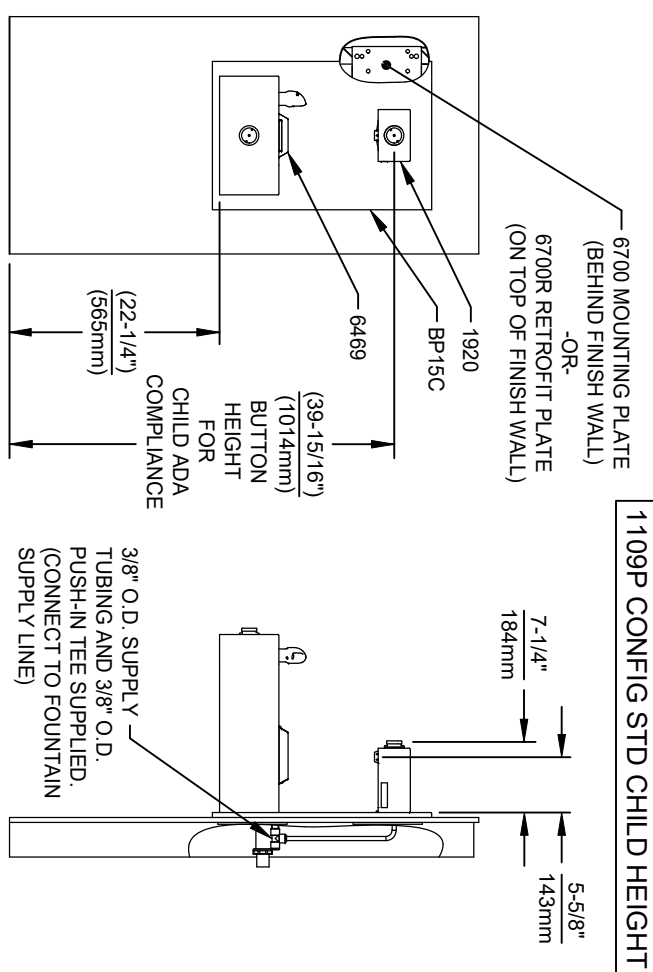

1109P CONFIG STD CHILD HEIGHT

INSTALLATION FOR 1109P CONFIG STD CHILD HEIGHT
MUST USE PARALLEL APPROACH WITH THIS BOWL COMBINATION

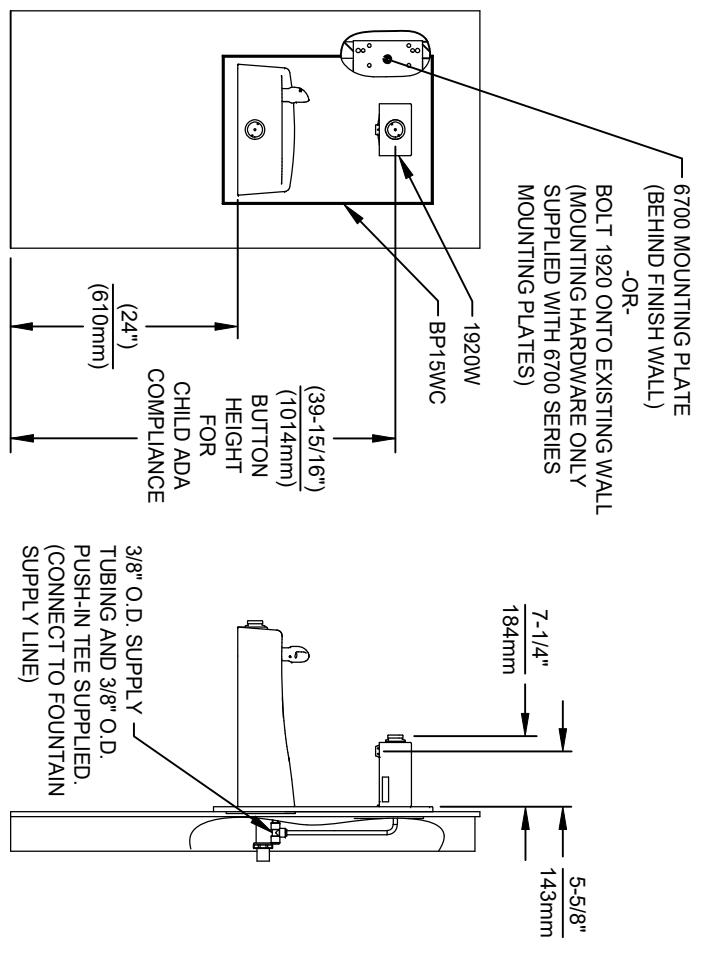

INSTALLATION FOR 1311P CONFIG STD CHILD HEIGHT

- NOTES:
1. HEIGHT DIMENSIONS SHOWN ARE FOR CHILD ADA APPLICATIONS:
 - BOTTLE FILLER HEIGHT AT 40" MAX.
 - DRINKING FOUNTAIN BUBBLER HEIGHT AT 30" MAX. (SEE SHEETS 3, 4 & 5 FOR ADULT ADA HEIGHT DIMENSIONS)
 2. SEE SEPARATE 6700 DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - SOLD SEPERATELY OR PART OF A BUNDLED PRODUCT).
 3. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.



Haws
Since 1906

EQ'NO. REVISED PERBY: J.G.
DRAWN BY: J.G.
DATE: 11/29/24
APPROVED: RH




MODEL(S)
1920/1920HPS/1920W

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

PART NUMBER
0510000490.D
REVISION
13

6469 STRAINER DRIP TRAY INSTALLATION

- 1 THE 6469 STRAINER DRIP TRAY ALLOWS THE INSTALLATION OF THE 1920 SERIES BOTTLE FILLER OVER HAWS 1109/1119 SERIES MODEL DRINKING FOUNTAINS. CENTER THE LOWER DRAIN PAN ALONG THE CENTERLINE OF THE FOUNTAIN.
- 2 EXTEND THE FRONT EDGE OF THE LOWER DRAIN PAN OVER THE EDGE OF THE FOUNTAIN BOWL BY APPROXIMATELY 1/4" (6mm). IT IS RECOMMENDED TO TEMPORARILY TAPE THE DRAIN PAN IN PLACE, INSTALL THE TOP COVER, AND ACTIVATE THE BOTTLE FILLER TO VERIFY THE WATER STREAM IS ALIGNED TO THE INLET HOLE. VERIFY THE LIP OF THE TOP COVER HANGS OVER THE EDGE OF THE FOUNTAIN BOWL.
- 3 MARK THE DRAIN PAN HOLE LOCATIONS ON THE FOUNTAIN. THE DRAIN PAN CAN NOW BE PERMANENTLY INSTALLED USING AN APPROPRIATE FASTENING METHOD (FASTENERS NOT SUPPLIED). FASTENING OPTIONS INCLUDE THRU BOLTS, RIVETS, TACK WELDS, AND DOUBLE-SIDED FOAM TAPE. INSTALL THE TOP COVER AND SECURE TO THE DRAIN PAN WITH THE SUPPLIED 4-40 FLAT HEAD SCREWS (QTY. 2).

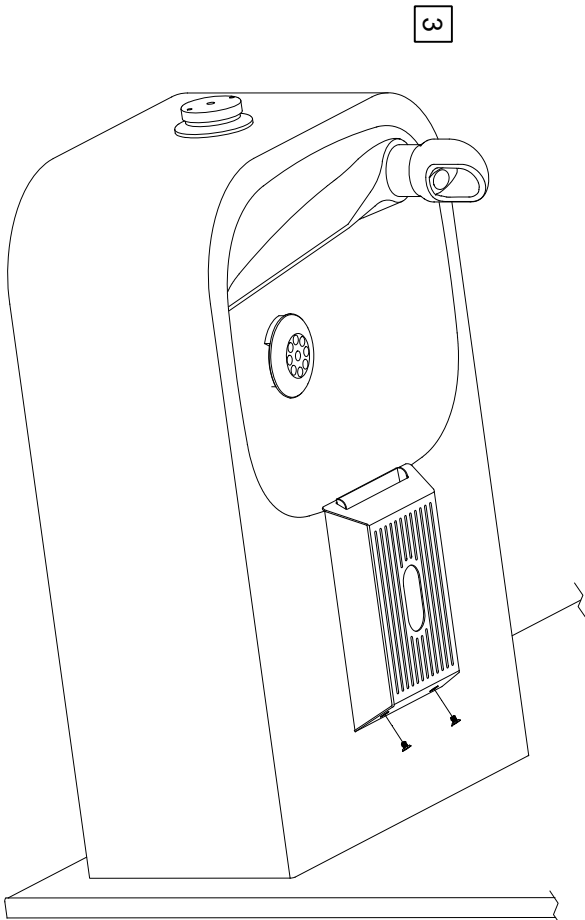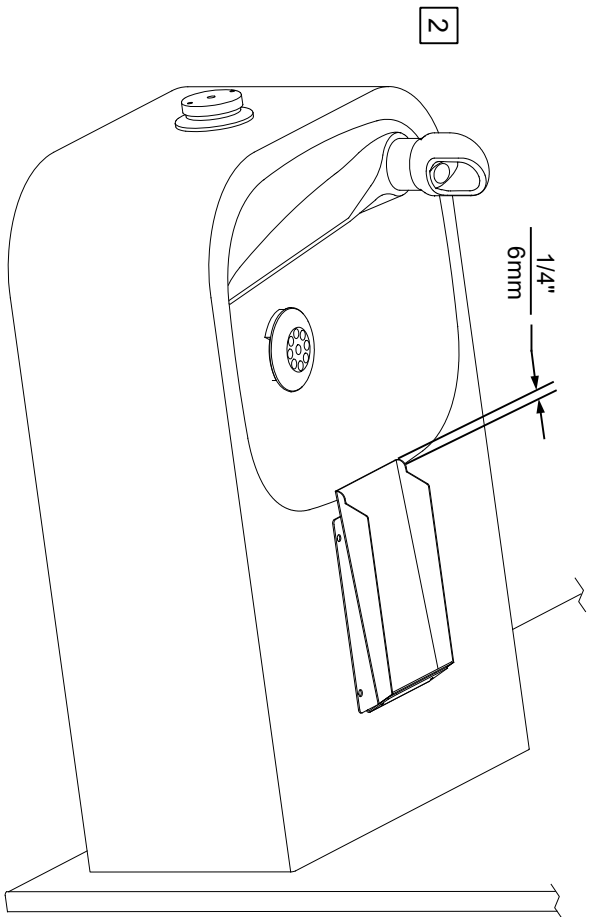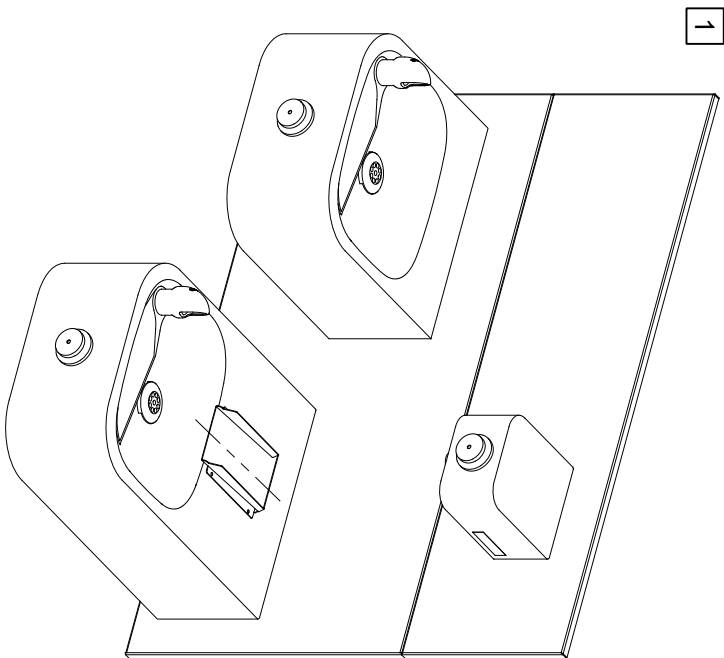

1455 KLEPPE LANE

SPARKS, NEVADA, 89431

(775) 359-4712 FAX (775) 359-7424


E-MAIL: HAWS@HAWS.CO.COM

WEBSITE: WWW.HAWS.CO.COM



ECN NO. 5150 REVISED PER BY: FV MODEL(S) 6469 PART NUMBER 0510000657.D

DRAWN: MJ DATE: 01/10/17 CHK'D: JS


APPROVED: FV DATE: 07/08/22 SCALE: 1:4 DRAWING TYPE: INSTALLATION SIZE: A SHEET 1 OF 1

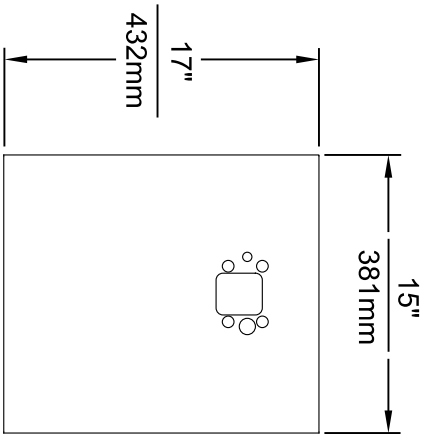

MODEL BP15 / BP15HPS / BP15W

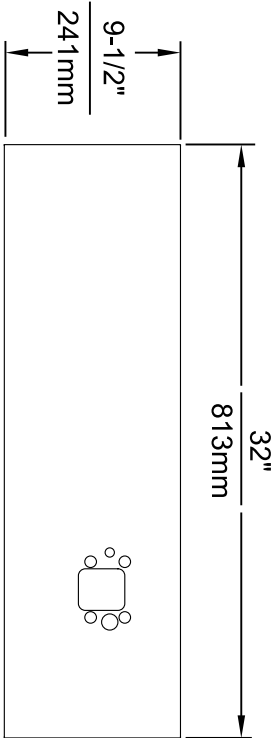

MODEL BP32 / BP32HPS / BP32W

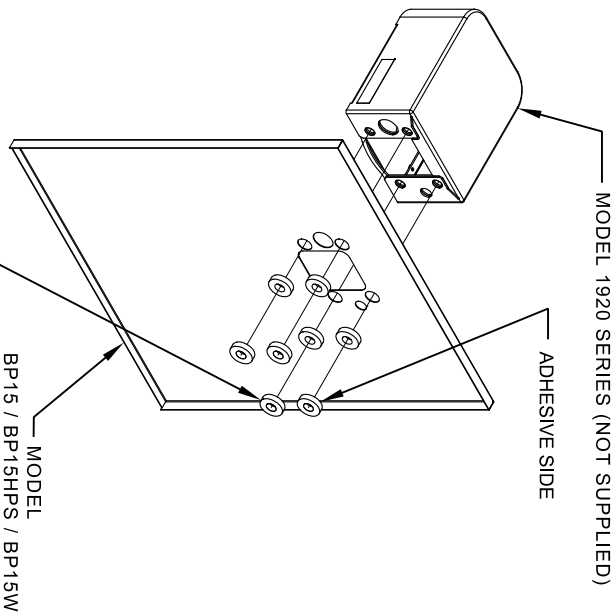

8 SPACERS (2 PER MOUNTING
BOLT IF THE MOUNTING PLATE (MODEL
6700 - NOT SUPPLIED) IS INSTALLED
BEHIND THE FINISHED WALL. USE 1
SPACER PER BOLT FOR RETROFITS
WHERE THE MOUNTING PLATE (MODEL
6700R - NOT SUPPLIED) IS INSTALLED
IN FRONT OF THE FINISHED WALL)

INSTALLATION OVER SINGLE FOUNTAIN

SHOWN FROM REAR


(SEE SHEET 3 OF 3 FOR INSTALLATION OF SPACERS
ON COMBINATION BOTTLE FILLER AND FOUNTAIN
BACK PANELS FOR CHILD HEIGHT APPLICATIONS -
MODELS BP15C & BP15WC)

- NOTES:
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL
CODES SHOULD BE ADHERED TO.
 2. BOTTLE FILLER SHOWN FOR REFERENCE ONLY (NOT SUPPLIED).

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
EQU. NO. REVISED PER BY: J.G.		MODEL(S)	
DRAWN BY: J.G.		DRAWING, BACK PANEL, SPACER INSTALLATION	
CHECKED BY: J.G.		FOR BP15 SERIES & BP32 SERIES, BOTTLE FILLER	
APPROVED BY: J.G.		SCALE: 1" = 1"	
DATE: 02/11/25		DRAWING TYPE: INSTALLATION	
FV		SIZE: A	
		SHEET 1 OF 3	
		PART NUMBER: 0510000493	
		REVISION: 6	


STEP 1

ATTACH SUPPLIED BRACKET TO WALL USING
APPROPRIATE FASTENERS. BRACKET IS
INSTALLED OVER THE HIGH-SIDE OF THE
DRINKING FOUNTAIN

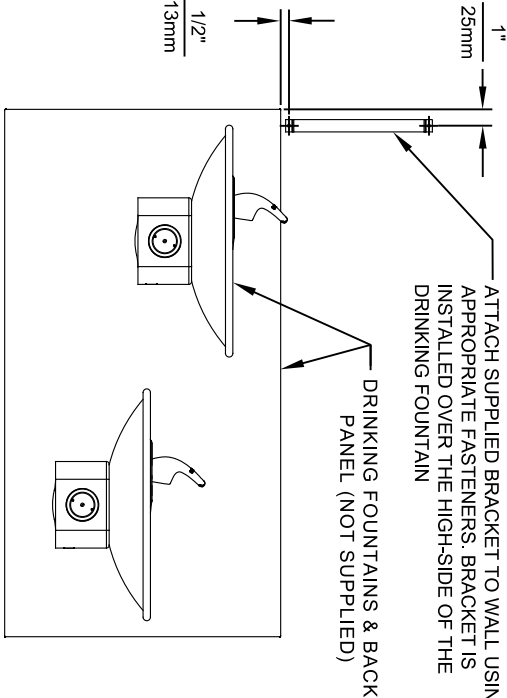

STEP 2

PLACE THE BACKPLATE AGAINST THE WALL AND SLIDE SIDEWAYS SO THE
TABS CATCH UNDER THE BRACKET.

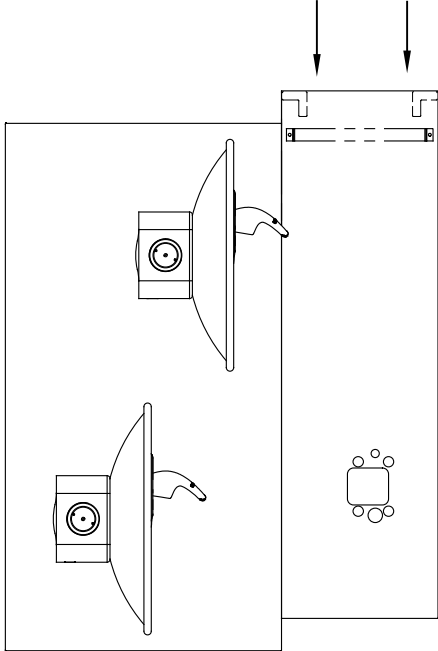


STEP 3

INSTALL THE BOTTLE FILLER (NOT SUPPLIED) PER THE INSTRUCTIONS
SUPPLIED WITH THE UNIT.

NOTES:

1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL
CODES SHOULD BE ADHERED TO.
2. BOTTLE FILLERS, DRINKING FOUNTAINS & DRINKING FOUNTAIN BACK
PANELS SHOWN FOR REFERENCE ONLY (NOT SUPPLIED).

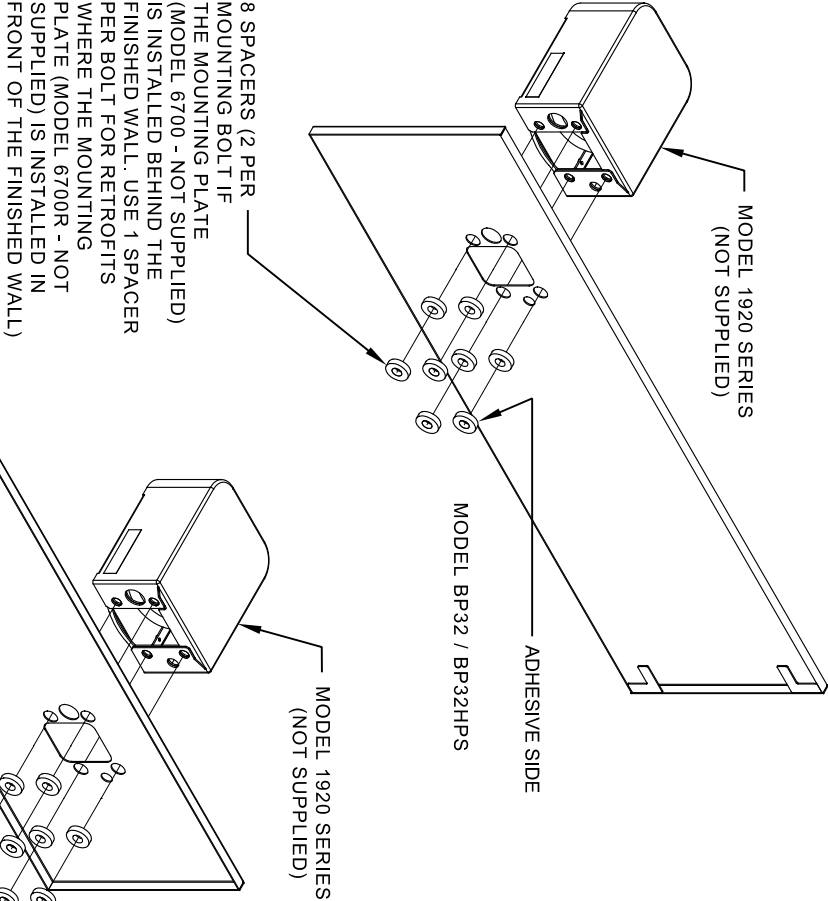


INSTALLATION OVER DOUBLE FOUNTAIN

SHOWN FROM REAR


EQN. NO. REQUESTED PER BY:		MODEL(S)	
EQN. NO.	EQN. 6148	J.G.	
DRAWN BY	10/05/17	CHNO.	
APPROVED:	DATE	J.G.	
F.V.	02/11/25	SCALE:	1:1
DRAWING, BACK PANEL, SPACER INSTALLATION		PART NUMBER	
FOR BP15 SERIES & BP32 SERIES, BOTTLE FILLER		0510000493	
REVISION		6	
SHEET 2 OF 3			



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

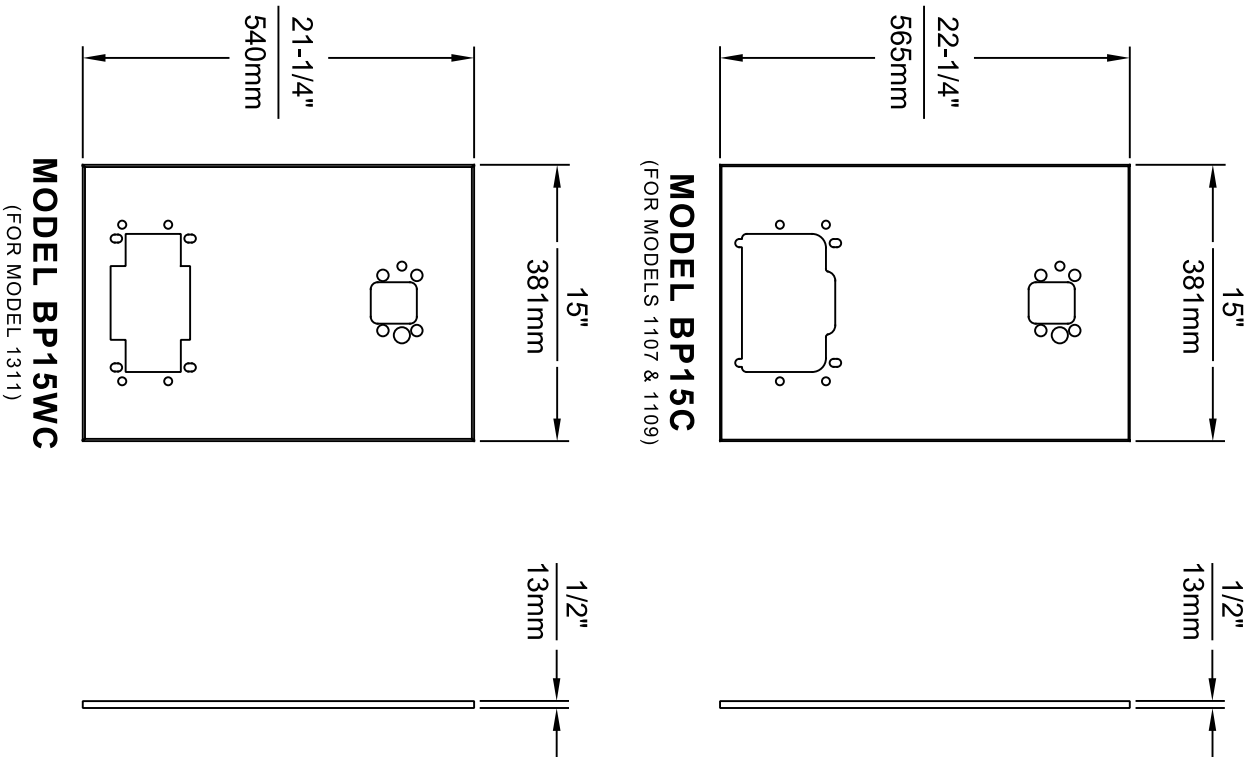

- NOTES:
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO.
 2. BOTTLE FILLER AND DRINKING FOUNTAIN SHOWN FOR REFERENCE ONLY (NOT SUPPLIED).

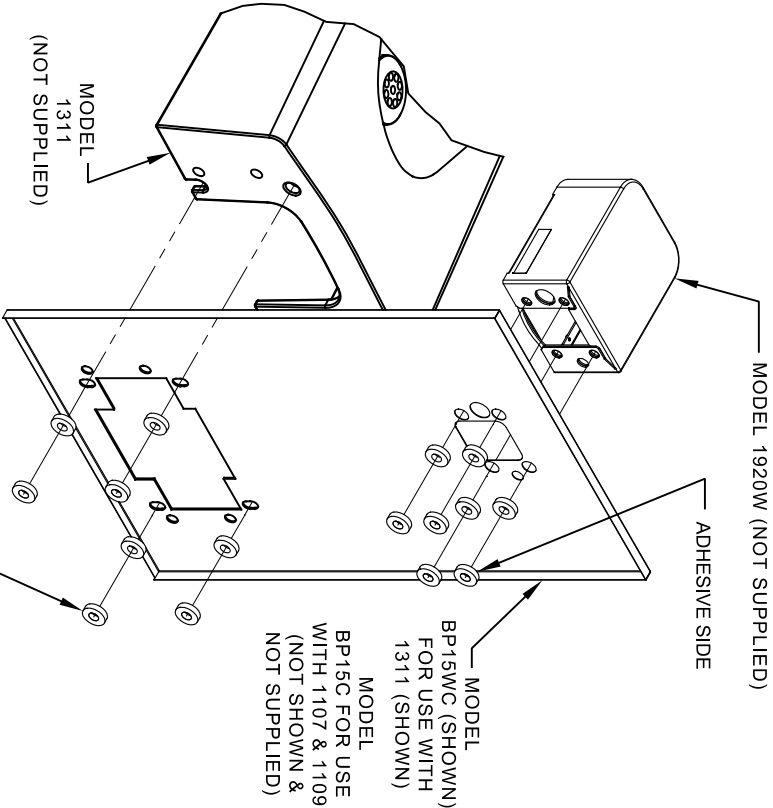

ONE PIECE INSTALLATION ON SINGLE FOUNTAIN

SHOWN FROM REAR

(MODEL BP15C & BP15WC ARE COMBINATION BOTTLE
FILLER AND FOUNTAIN BACK PANELS USED FOR CHILD
HEIGHT APPLICATIONS ONLY ON MODELS 1107, 1109 & 1311
- BOTTLE FILLER & DRINKING FOUNTAIN NOT SUPPLIED)

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
EON NO.	REMOVED PER BY:	MODEL(S)	PART NUMBER
SIZE	EON 6146 N.J.G.	DRAWING, BACK PANEL, SPACER INSTALLATION	0510000493
DRAWN BY	10/15/23 J.G.	FOR BP15 SERIES & BP32 SERIES, BOTTLE FILLER	REVISION
APPROVED:	DATE	SCALE: 11	SIZE A
FV	02/11/25	DRAWING TYPE: INSTALLATION	SHEET 3 OF 3

6700 INDEX

INSTALLATION WITH:	TYPICAL USES	SEE SHEET ...
GENERAL INSTALLATION	IMPORTANT INFORMATION FOR ALL INSTALLATIONS	3 OF 6
1001 BOWLS	HAWS SERIES 1001X, 1001.8X	3 OF 6
1107 BOWLS	HAWS SERIES 1107X, 1107.8X	3 OF 6
1109 BOWLS	HAWS SERIES 1109X, 1109.8X	3 OF 6
1047 BOWLS	HAWS SERIES 1047	4 OF 6
1011 BOWLS	HAWS SERIES 1011X, 1011.8X	4 OF 6
1119 BOWLS	HAWS SERIES 1119X, 1119.8X	4 OF 6
1117 BOWLS	HAWS SERIES 1117X, 1117.8X	5 OF 6
1311 BOWLS	HAWS SERIES 1311	5 OF 6
1501 BOWLS	HAWS SERIES 1501	5 OF 6
CHILD HEIGHT	HAWS 1107PCH, 1109PCH, 1311PCH	6 OF 6



Haws





Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO. REVISED PER BY: ECN: 6148 JG
DRAWN: JG DATE: 10/03/24 CHK'D: JG
APPROVED: FV DATE: 02/11/25

MODEL(S)
67/00

PART NUMBER
0002080016
REVISION
26

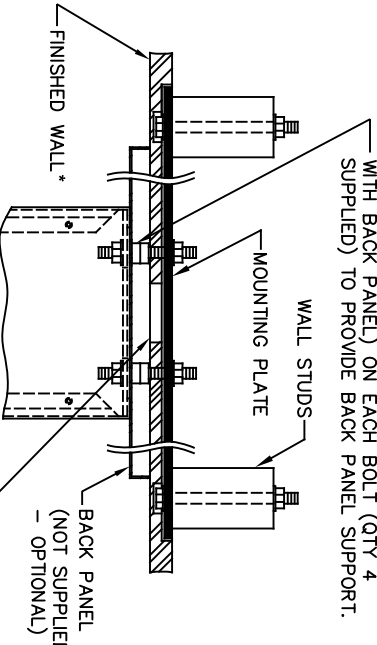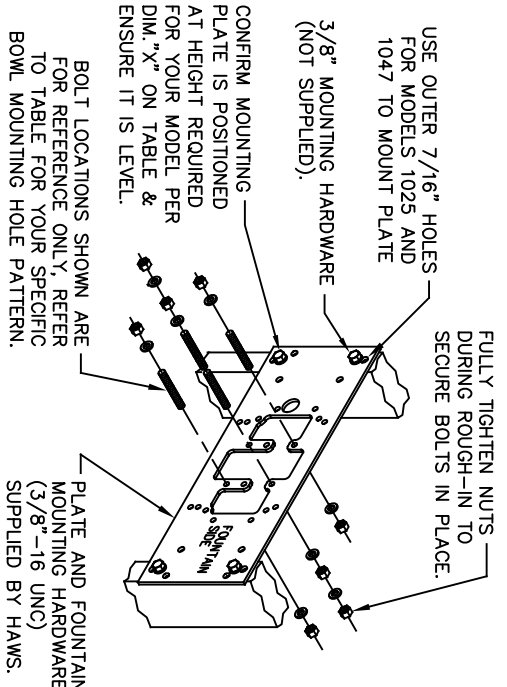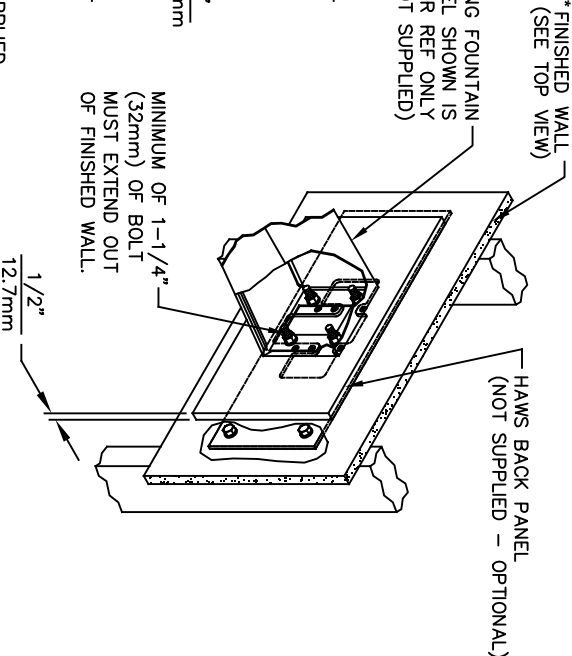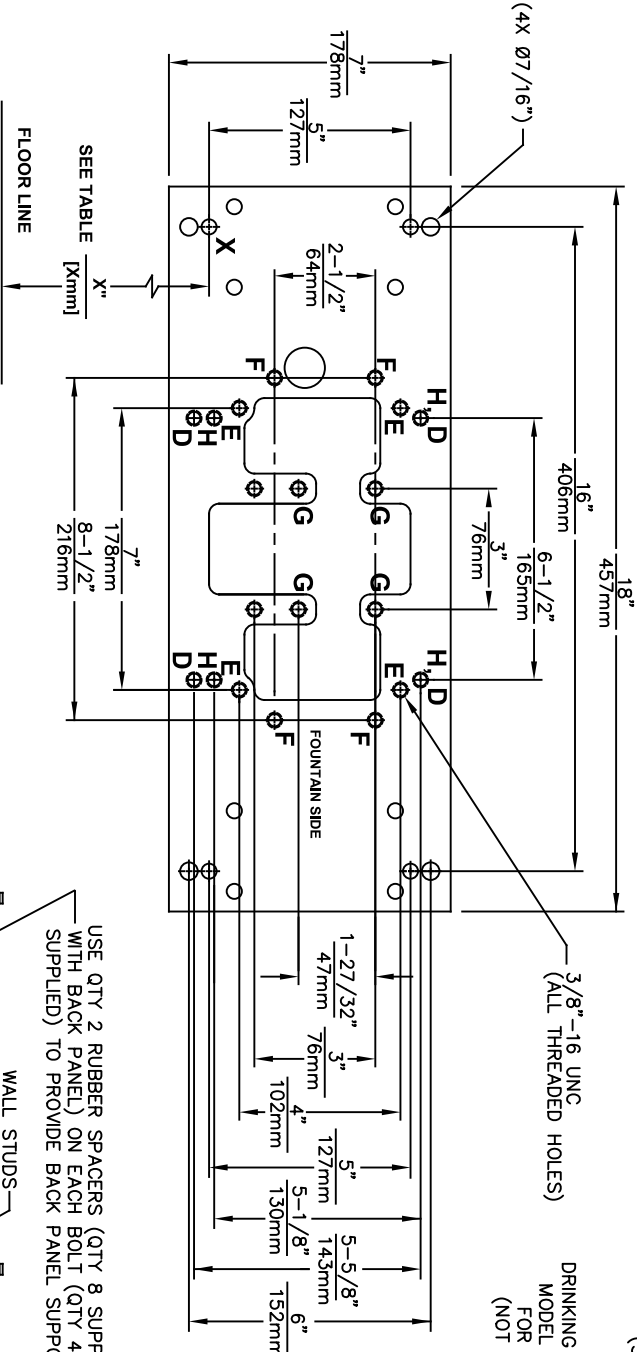

DRINKING FOUNTAIN (ONLY) AT 27" ADULT HEIGHT (SEE SPECIFIC MODEL O&M'S FOR OTHER HEIGHTS)			
MODEL	USE BOWL MTG. HOLE PATTERN	USE "X" DIM. BELOW TO POSITION MOUNTING PLATE HOLE "X"	
1001	"G"	25-3/8" [645mm]	
1025	"D"	28-1/8" [714mm]	
1047	"E"	24-3/8" [619mm]	
1105	"H"	34-5/16" [872mm]	
1107	"F"	26-3/16" [665mm]	
1109	"H"	27-5/16" [694mm]	
1109.14	"H"	27-5/16" [694mm]	
1109FR	"H"	27-5/16" [694mm]	
1311	"E"	26-3/4" [679mm]	
WASTE DRIP TRAY (ONLY) AT 27" ADULT HEIGHT			
6468	"G"	25-3/8" [645mm]	
1922	"G"	25-3/8" [645mm]	

6700 MOUNTING PLATE
FOR USE WITH
DRINKING FOUNTAINS
AND WASTE DRIP TRAYS
AT 27" ADULT HEIGHT
(SEE SHEETS 2 - 5 FOR USE WITH
BOTTLE FILLER 1920/1920HO SERIES
AND CHILD HEIGHT APPLICATIONS)

****FINISH WALL OVER MOUNTING PLATE AND BEHIND BACK PANEL. MAKE SURE THAT FINISHED WALL EXTENDS WITHIN THE BRACKET/BOWL MOUNTING HOLES (TO PROVIDE SURFACE AREA FOR RUBBER SPACERS TO CONTACT).**

CAUTION

REGARDING CONCRETE/MASONRY WALL MOUNTING: DO NOT SECURE MOUNTING PLATE TO SAME SIDE OF WALL AS FOUNTAIN. AVOID COMPROMISING INTEGRITY OF WALL WHEN ANCHORING FOUNTAIN. IT IS RECOMMENDED THAT INSTALLER CALL TECHNICAL SUPPORT IF THERE ARE ANY QUESTIONS AS TO HOW TO OBTAIN A PROPER ANCHOR IN CONCRETE/MASONRY WALLS. 1-800-766-5612



Haws®
Since 1906

ECN NO. REVISED PERBY: 6700
DRAWN: JG
DATE: 09-20-23
CHKD: JG
CUL: JG





MODEL(S)
6700


SCALE: N/A
DRAWING TYPE: INSTALLATION
SIZE: A
SHEET: 2 OF 6

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM



PART NUMBER
0002080016

REVISION
26

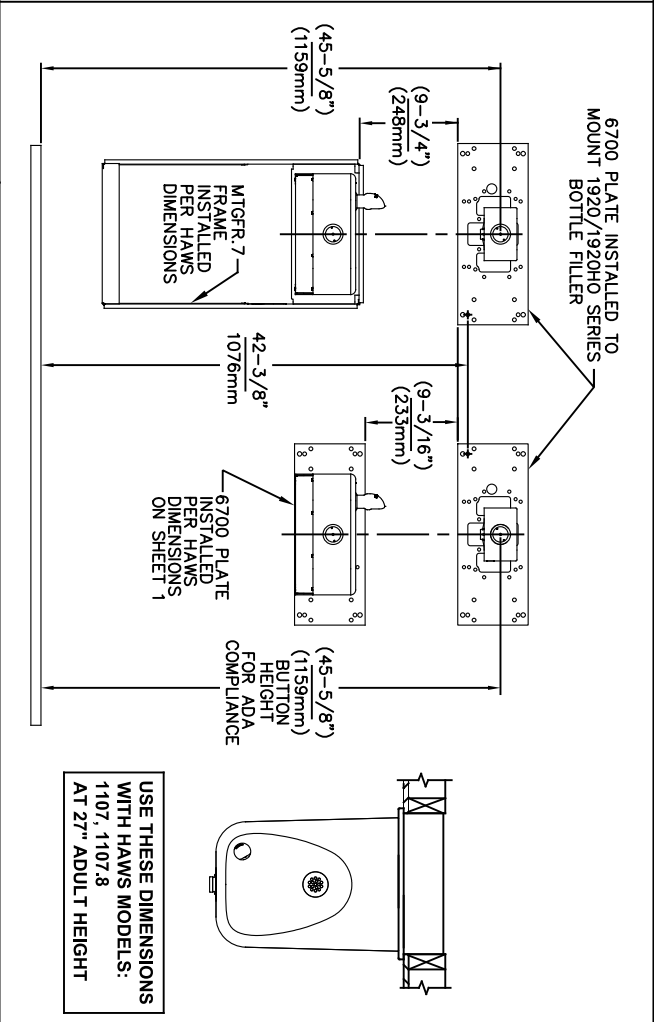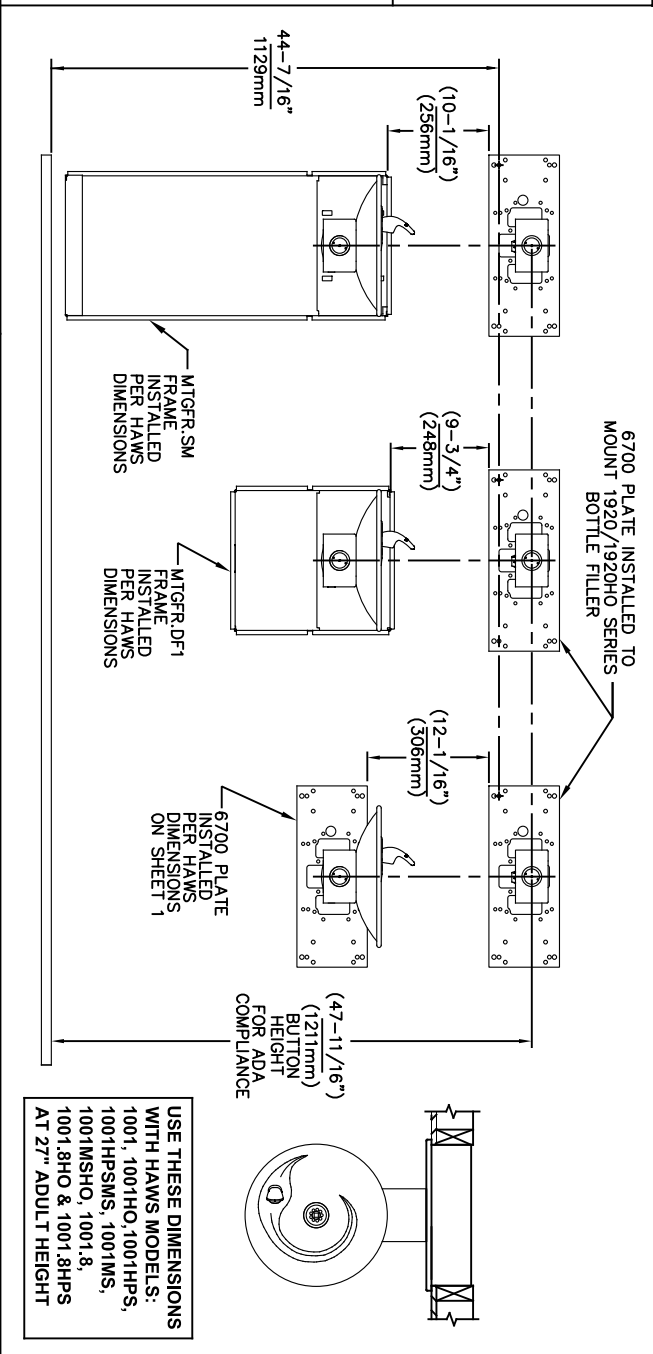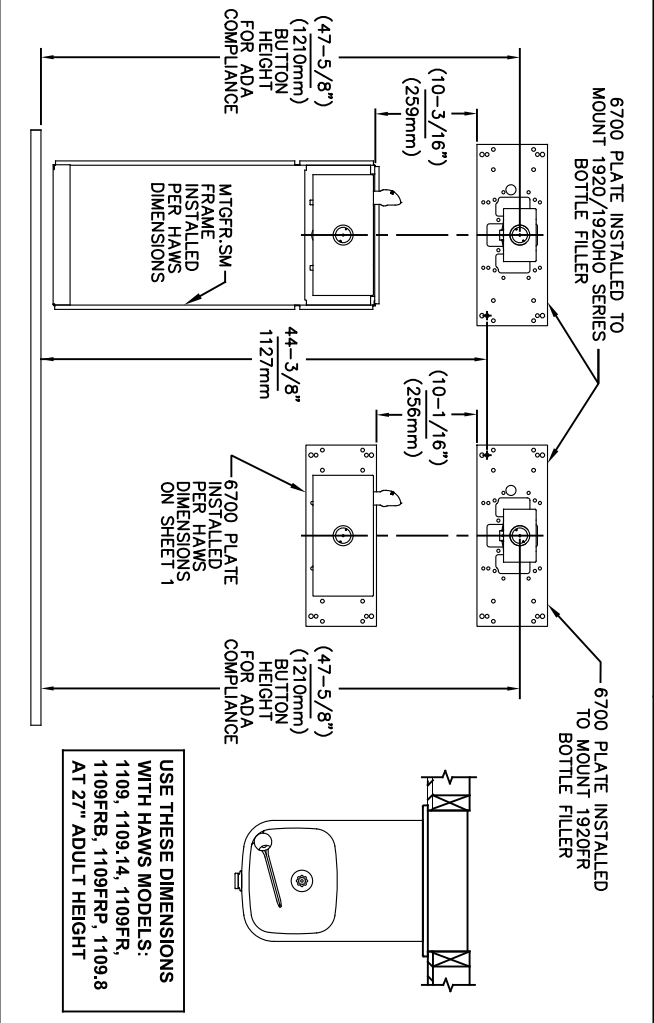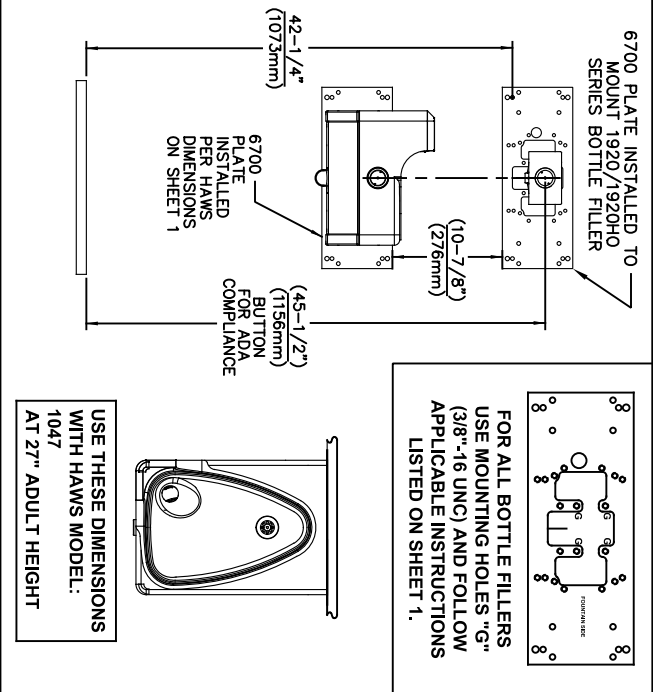


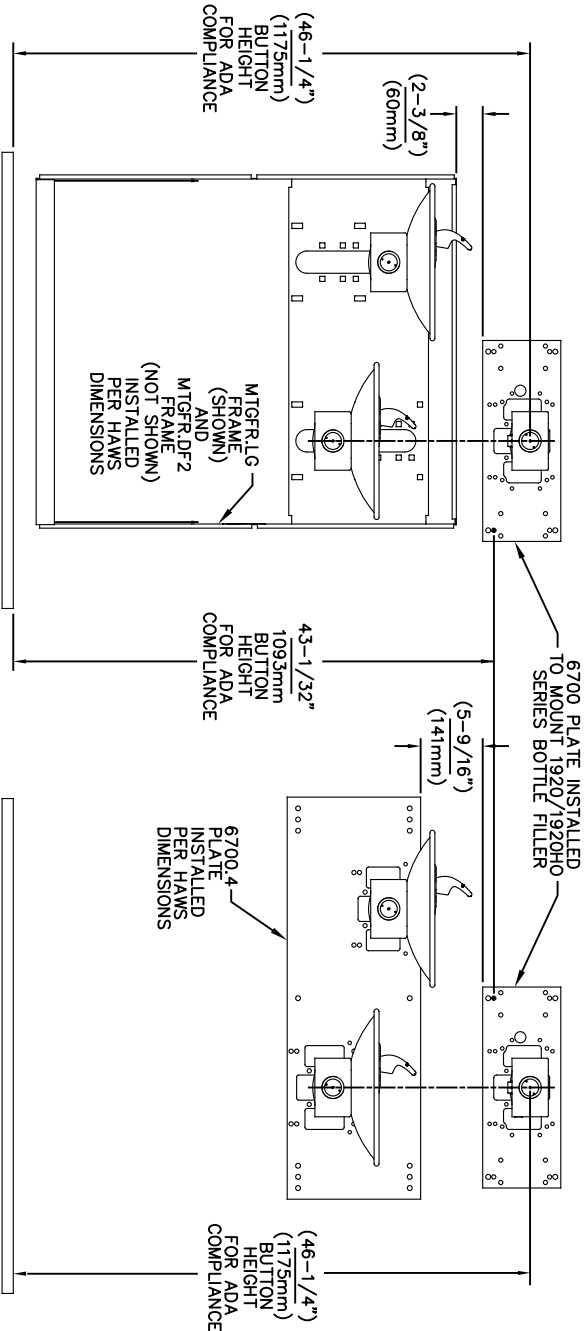

USE THESE MOUNTING DIMENSIONS IF INSTALLING OVER HAWS FOUNTAIN
MODEL: 1011, 1011HO, 1011HO2, 1011HPS, 1011HPSHO, 1011HPSHO2, 1011HPSMS, 1011HMS, 1011MSHO, 1011MSHO2, 1011.8, 1011.8HO, 1011.8HO2 & 1011.8HPSM AT 27" ADULT HEIGHT
INSTALL THE 6700 ABOVE THE FOUNTAIN MOUNTING PLATE OR FRAME AT THE DIMENSION SHOWN FOR CORRECT BACKPANEL SPACING
BACK PANELS FOR BOTTLE FILLERS (NOT SUPPLIED - OPTIONAL) ARE NOT SHOWN FOR CLARITY.

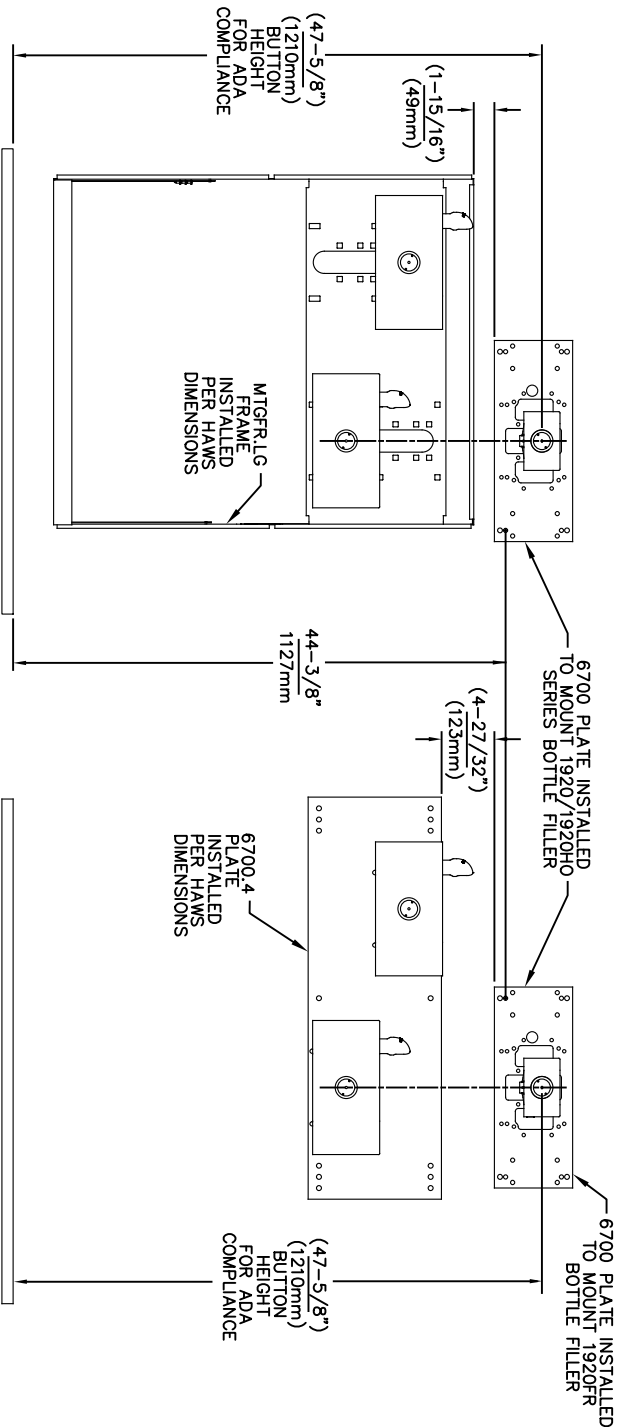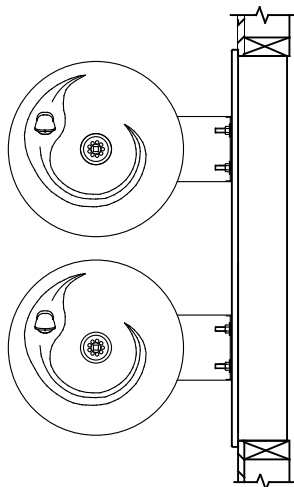

USE THESE MOUNTING DIMENSIONS IF INSTALLING OVER HAWS FOUNTAIN
MODEL: 1119, 1119.14, 1119.14HO, 1119.14HO2, 1119FR, 1119FRB, 1119FRP, 1119HO, 1119HO2 & 1119.8 AT 27" ADULT HEIGHT
INSTALL THE 6700 ABOVE THE FOUNTAIN MOUNTING PLATE OR FRAME AT THE DIMENSION SHOWN FOR CORRECT BACKPANEL SPACING
BACK PANELS FOR BOTTLE FILLERS (NOT SUPPLIED - OPTIONAL) ARE NOT SHOWN FOR CLARITY.

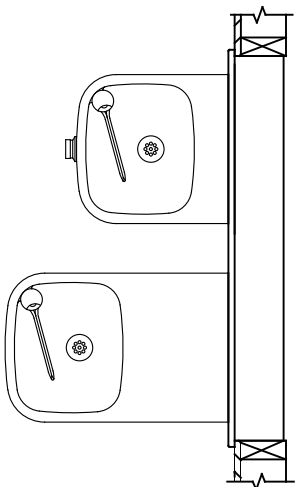

- NOTES:
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO.
 2. BACK PANELS (OPTIONAL) NOT SHOWN FOR CLARITY.



6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER
(SEE SHEET 1 FOR USE WITH
DRINKING FOUNTAINS)






Since 1906

1456 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PERBY:	MODEL(S)
5550 ECN 6148 JG	6700
DRAWN: DATE: CHKD. JG	
FV 05/14/20 JG	
APPROVED: DATE: 02/11/25	
SCALE: 1:13	DRAWING TYPE: INSTALLATION
SHEET 4 OF 6	REVISION: 26

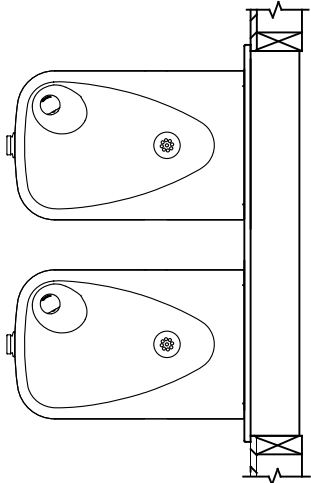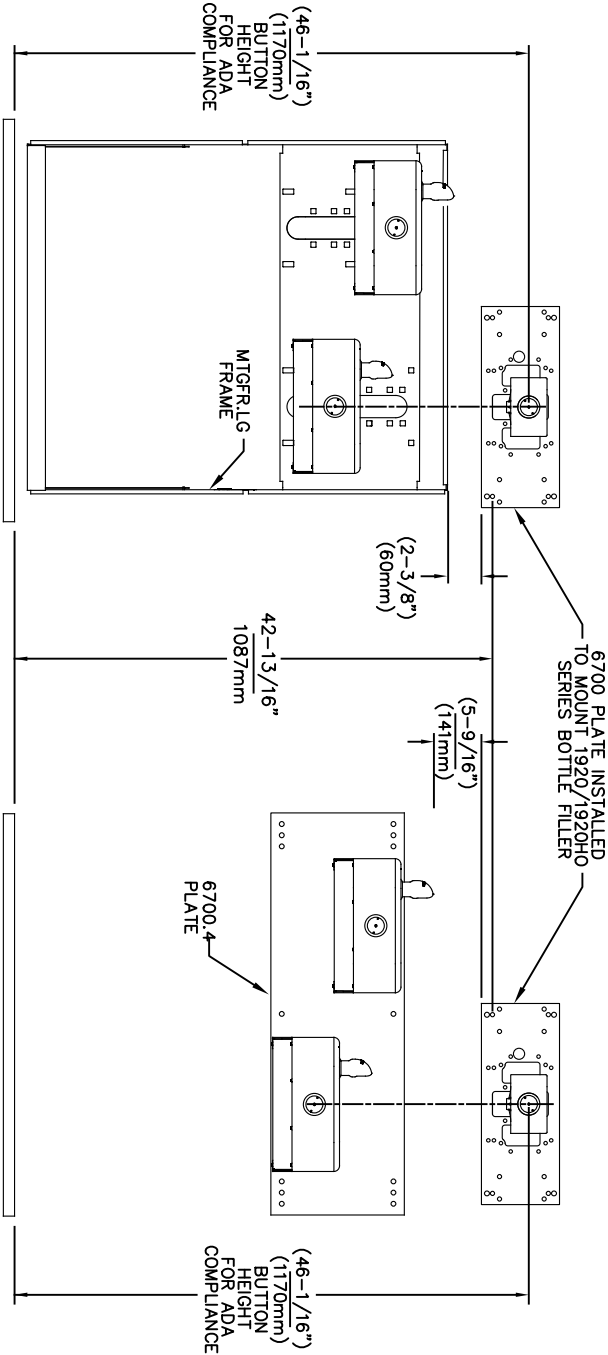

USE THESE MOUNTING DIMENSIONS IF
INSTALLING OVER HAWS FOUNTAIN
MODEL: 1117, 1117.8
AT 27" ADULT HEIGHT
INSTALL THE 6700 ABOVE THE
FOUNTAIN MOUNTING PLATE OR
FRAME AT THE DIMENSION SHOWN
FOR CORRECT BACKPANEL SPACING
BACK PANELS FOR BOTTLE FILLERS
(NOT SUPPLIED - OPTIONAL) ARE NOT
SHOWN FOR CLARITY.

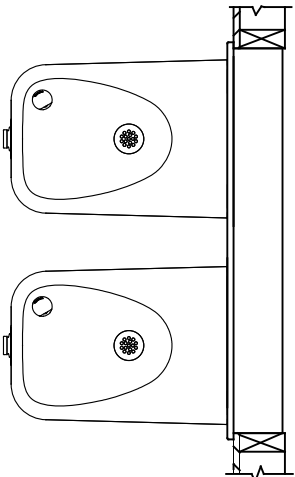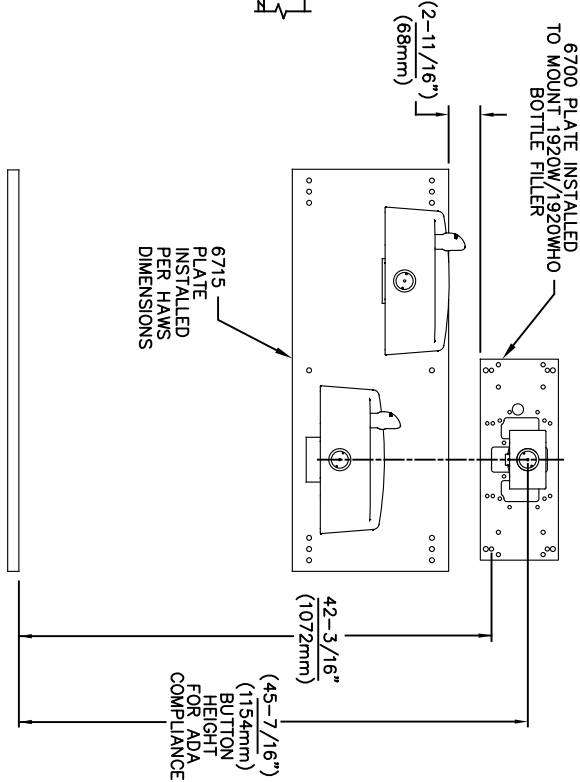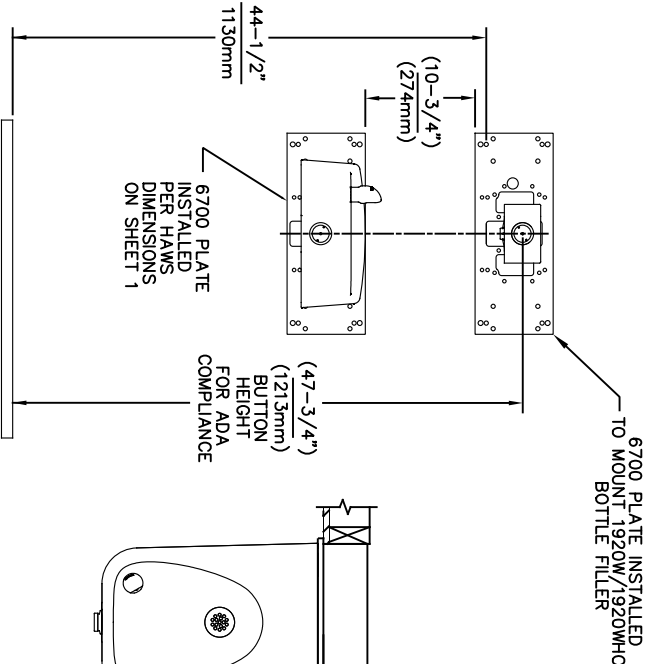

USE THESE MOUNTING DIMENSIONS IF
INSTALLING OVER HAWS FOUNTAIN
MODEL: 1311, 1501
AT 27" ADULT HEIGHT
INSTALL THE 6700 ABOVE THE
FOUNTAIN MOUNTING PLATE AT
THE DIMENSION SHOWN FOR CORRECT
BACKPANEL SPACING (IF APPLICABLE).
BACK PANEL FOR BOTTLE FILLER
(NOT SUPPLIED - OPTIONAL) IS NOT
SHOWN FOR CLARITY.

- NOTES:
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO.
 2. BACK PANELS (OPTIONAL) NOT SHOWN FOR CLARITY.

6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER
(SEE SHEET 1 FOR USE WITH
DRINKING FOUNTAINS)




Since 1906


ECN NO. REVISED PERBY:	MODEL(S)
5550	6700
DRAWN: FV	DATE: 05/14/20
CHKD: JG	
APPROVED: FV	DATE: 02/11/25
SCALE: 1:13	DRAWING TYPE: INSTALLATION
SHEET 5	OF 6

1456 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM


PART NUMBER
0002080016
REVISION
26

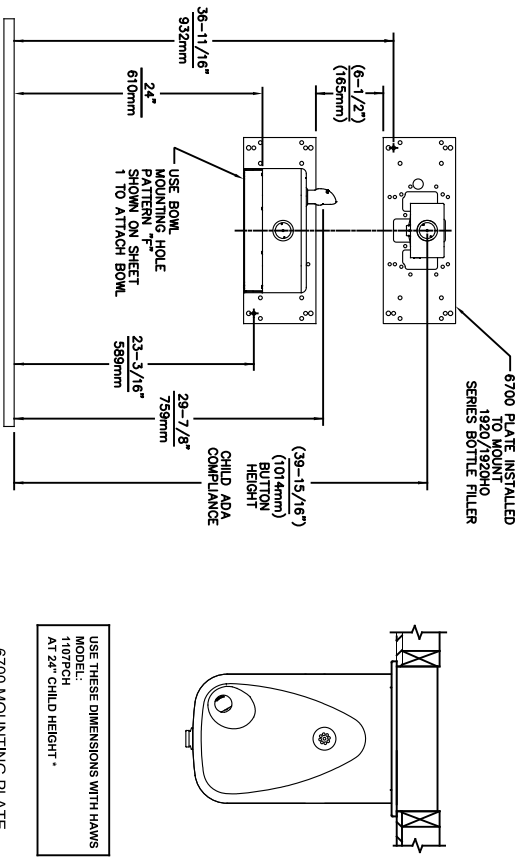


6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER AT
40\" MAX. AND
DRINKING FOUNTAIN
AT 24\" AND BUBBLER HEIGHT AT 30\"
MAX. FOR CHILD ADA HEIGHT
(SEE SHEETS 1 & 2 FOR USE WITH
DRINKING FOUNTAIN AT 27\" ADULT
HEIGHT DIMENSIONS)

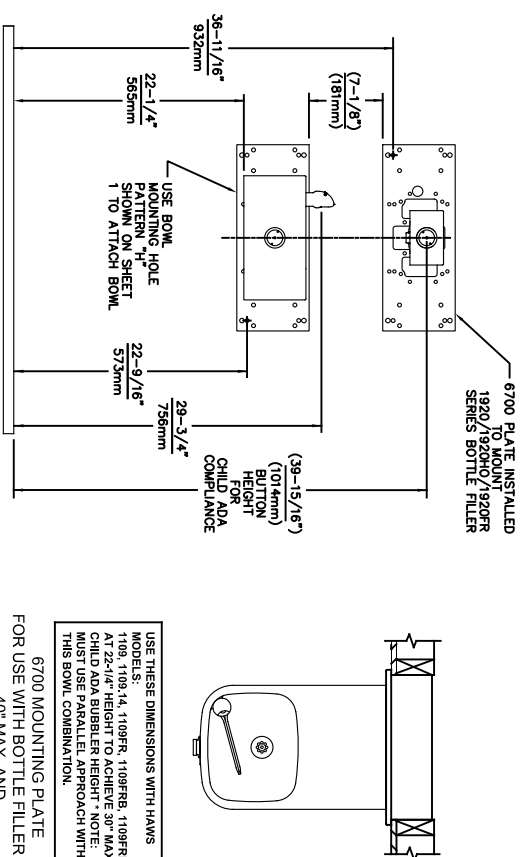

- NOTES:
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO.
 2. ONE PIECE BACK PANELS BP15C (FOR USE WITH MODELS 1107L, 1109 SERIES & BOTTLE FILLER) & BP15WC (FOR USE WITH MODEL 1311 & BOTTLE FILLER) ARE USED FOR CHILD HEIGHT APPLICATIONS AND ARE OPTIONAL (NOT SHOWN FOR CLARITY).

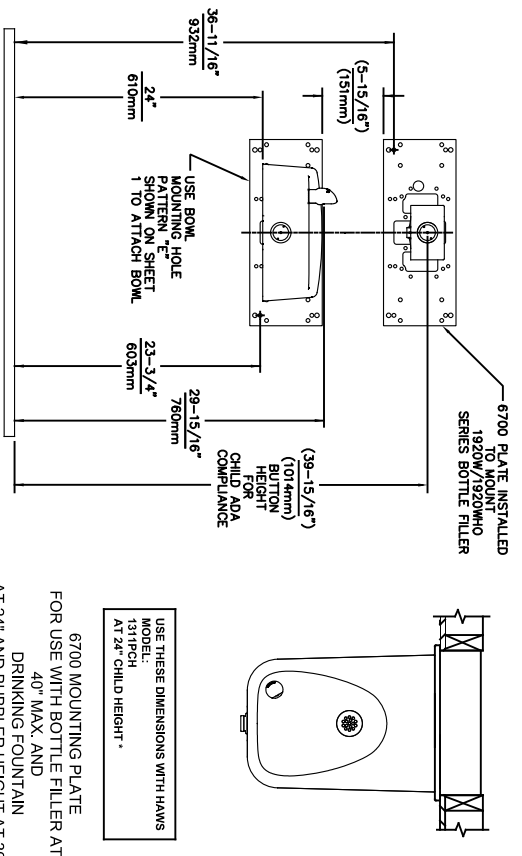

6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER AT
40\" MAX. AND
DRINKING FOUNTAIN
AT 24\" AND BUBBLER HEIGHT AT 30\"
MAX. FOR CHILD ADA HEIGHT
(SEE SHEETS 1 & 4 FOR USE WITH
DRINKING FOUNTAIN AT 27\" ADULT
HEIGHT DIMENSIONS)

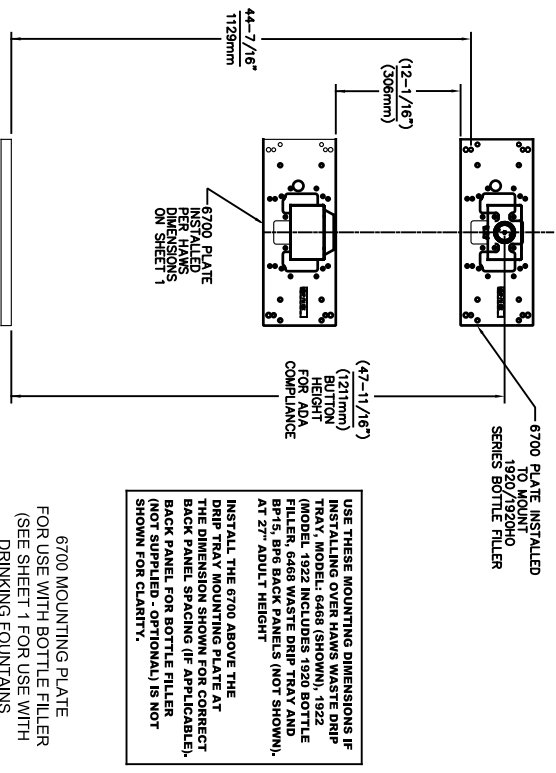

6700 MOUNTING PLATE
FOR USE WITH BOTTLE FILLER
(SEE SHEET 1 FOR USE WITH
DRINKING FOUNTAINS
AND WASTE DRIP TRAY)



Since 1906

1456 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PERBY: MODEL(S)
5893 1 ECN: 6148 JG
DRAWN: DATE: CHKD:
FV 07/26/23 JG
APPROVED: DATE: SCALE: 1:13 DRAWING TYPE: INSTALLATION SHEET A OF 6

6700

PART NUMBER
0002080016
REVISION
26