



model H1117.8HO

Chilled Vandal-Resistant ADA Motion-Activated/Push Button Adjustable Fountain

FEATURES & BENEFITS

MOUNTING

Heavy-duty 16-gauge galvanized steel mounting frame with welded-in heavy-duty 10 gauge mounting plate with pre-punched mounting holes. Further convenience is given to the chiller with the integral fold-out shelf.

ADA CONFIGURABLE

Supplied with a low profile bowl, individual adjustable panels, and multiple mounting positions, this fountain can be configured for adult and child ADA considerations.

BUBBLER HEADS

Polished chrome-plated brass bubbler head with integral 11/16" dia. basin shank and stainless anti-rotation roll pin for vandal resistance strength. Shielded, angled stream opening provides a steady, sanitary source of drinking water at .45 gpm.

DRINKING FOUNTAIN VALVES

Fountain incorporates a touchless sensor operated stainless steel solenoid valve controlled by a transformer on one side and a push-button activated valve which offers the only all stainless steel valve body that is machined out of solid bar stock and is fully serviceable through the front of the push button assembly offering access to the water control cartridge and integral water supply strainer on the other.

HANDS FREE

Touchless operation for safety and peace of mind.

CONSTRUCTION

One-piece drinking fountains with low-profile design made of 14 gauge Type 304 stainless steel with 1/4" (.6 cm) thick stainless back plates welded in, and vandal-resistant stainless bottom plates. Satin finish resists stains and corrosion.

VANDAL-RESISTANT

The bubbler heads, push button, drain strainers and bottom plates are locked in place, discouraging unwanted vandalism.



SPECIFICATIONS

Model H1117.8HO low profile electric vandal-resistant ADA wall mounted combination motion activated/push button adjustable drinking fountain shall include dual 14-gauge Type 304 Stainless Steel satin finish basins with integral 1/4" (.6 cm) thick stainless-steel back plates, touchless sensor operated solenoid valve with 30-second obstruction time-out on one side, and push-button operated stainless steel valve with front-accessible cartridge and flow adjustment on the other, 100% lead free waterways, polished chrome-plated brass vandal-resistant bubbler heads with integral laminar anti-squirt flow, polished chrome-plated brass vandal-resistant waste strainers, vandal-resistant bottom plates, stainless steel satin finish back panel and louvered intrusion-proof grill, adjustable mounting allowing either basin high or low, and 1-1/4" NPT concealed all cast-brass traps. The patented design allows the unit to be mounted to meet ADA or Child ADA specifications. The R-134a refrigeration system is hermetically sealed and delivers a minimum of 8 gph (30.3 L) of water at 50° F (10° C) cooled from 80° F (26.7° C) inlet water at 90° F (32.2° C) ambient. 115 Volts, 60Hz, rated watts: 370, full load amps: 5

REQUIRES MODEL HCR8 and MTGFR.17 PRICED SEPARATELY.

OPTIONS

Bottle Filler: Model 1920HO, bottle filler can be a stand-alone station, or mounted above Haws 1001, 1011, 1107L, 1109, 1117L, and 1119 series drinking fountain models.

Custom Logo Panel: Model 6475, Hydration By Haws™ logo panel with customization options.

Water Filter: Model 6426, 10" x 2" (25.4 x 5.1 cm), in-line lead removal element that reduces lead from incoming water supply.

Bottle Filler Stand: Model BTL1107, add-on stainless steel stand to place bottle on when 1920 bottle filler is used.

FOR INDOOR USE ONLY APPLICATIONS






Specifically, this type fountain may be placed in settings such as: schools, office buildings, shopping malls, and other indoor environments where there is a demand for a chilled water source and/or wheel chair access. Model meets all current Federal Regulations for the disabled including those in the Americans with Disabilities Act. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61- Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and NSF/ANSI/CAN 61: Q ≤ 1. Haws electric water coolers comply with ARI Standard 1010 and ANSI A117.1, and are listed by Underwriter Laboratories to U.S. and Canadian standards.



NOTES:

1. HOLD ROUGH-IN DIMENSIONS $\pm 1/8"$ (3.2mm)
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO. FOR INSTALLATION DIMENSIONS (LOCATIONS), WASTE AND SUPPLY REQUIREMENTS OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY.
3. REFER TO FIG. 17 INSTALLATION DRAWING FOR FRAME ROUGH-IN DIMENSIONS.
4. REFER TO 8974 SERIES OPERATION AND MAINTENANCE MANUAL FOR PUSH BUTTON AND VALVE INSTALLATION/MAINTENANCE INSTRUCTIONS.
5. ROUGH-IN DIMENSIONS FOR FOUNTAIN HEIGHTS:
 - CHILD WHEELCHAIR HEIGHT: SEE SHEET 3 FIG 1
 - WASTE: 26-1/4" (667mm)
 - FOUNTAIN: 24" (610mm)
 - BUBBLER: 29-7/8" (756mm)
 - ADULT WHEELCHAIR HEIGHT: SEE SHEET 3 FIG 2
 - WASTE: 28-1/4" (713mm)
 - FOUNTAIN: 27" (686mm)
 - BUBBLER: 32-7/8" (832mm)
 - ADULT STANDING HEIGHT: SEE SHEET 3 FIG 3
 - WASTE: 34-3/4" (883mm)
 - FOUNTAIN: 32-1/2" (825mm)
 - BUBBLER: 39-3/8" (972mm)
6. REFER TO MODEL H1117.8HO/H117.8HOZ INSTALLATION DRAWING SHEET 3 OF 3 (ON HAWS WEBSITE WWW.HAWSCO.COM) FOR PERMISSIBLE BOWL MOUNTING PATTERNS. TWO WHEELCHAIR HEIGHT FOUNTAINS CANNOT BE MOUNTED SIDE BY SIDE PER ANSI A117.1





NOTES CONTINUED ON SHEET 3 OF 3

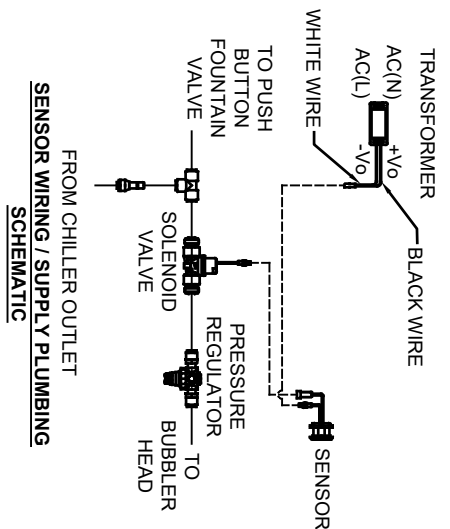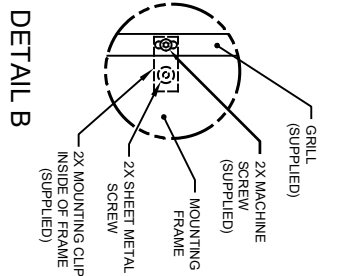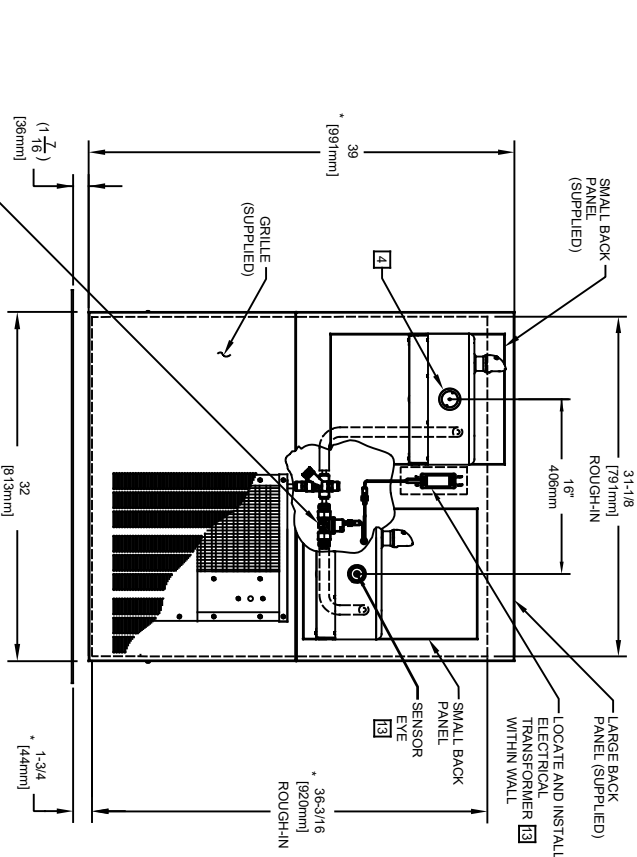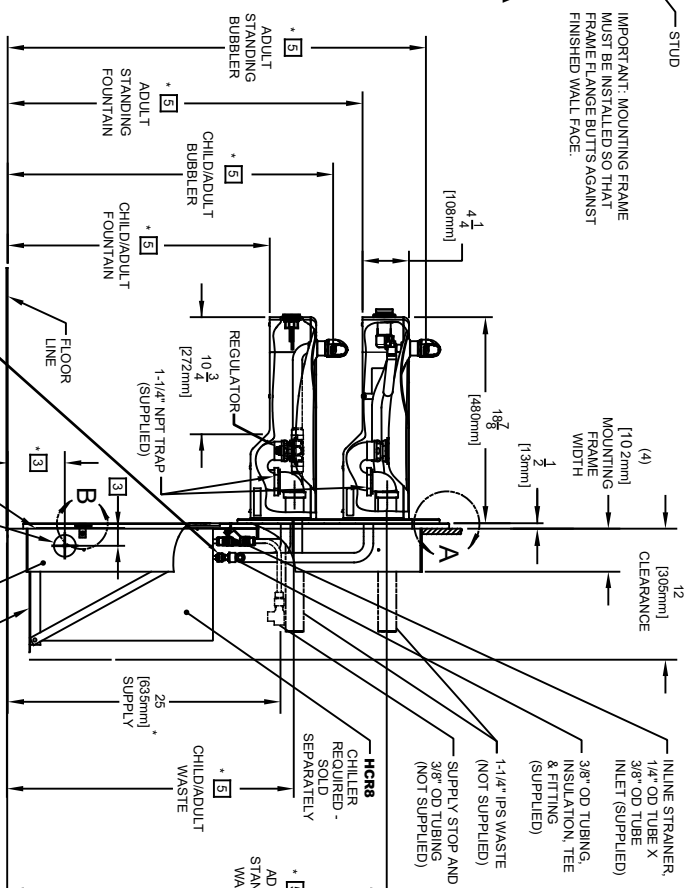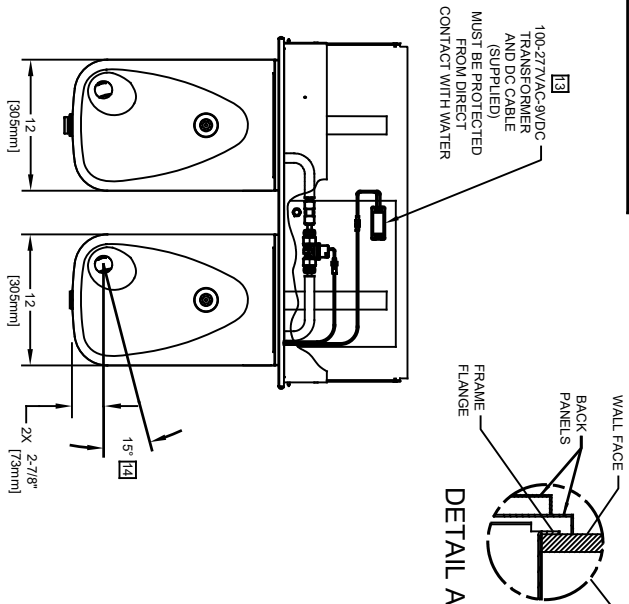

MODEL H1117.8HO SHOWN
MODEL H1117.8HOZ ON SHEET 2
(ROUGH-IN DIMENSIONS APPLY TO BOTH MODELS WITH EXCEPTIONS NOTED ON SHEET 2)

1456 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO. REVISED PER BY:		MODEL(S)	
5706	ECN: 5706	H1117.8HO/H1117.8HOZ	
DRW: FV	DATE: 06/28/21	CHKD: DP	
APPROVED: FV	DATE: 06/28/21	SCALE: NA	DRAWING TYPE: INSTALLATION
PART NUMBER: 0510001207.D		SIZE: A	SHEET: 1 OF 3
REVISION: 1			

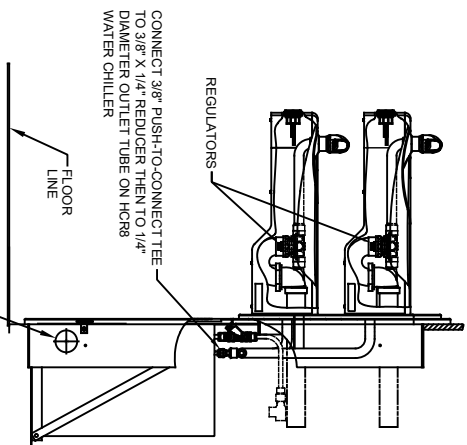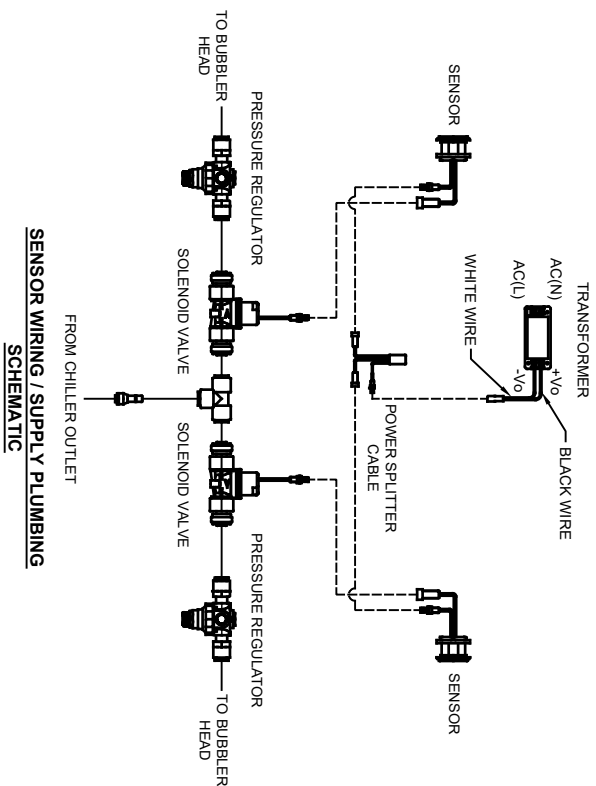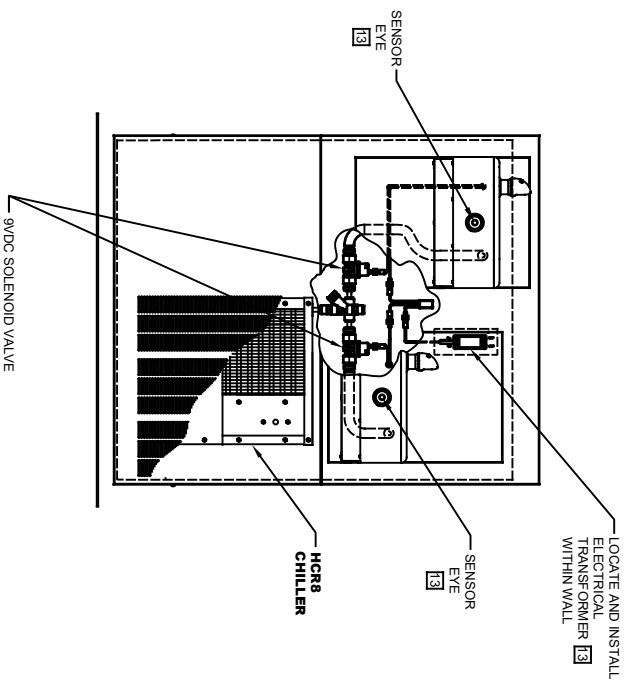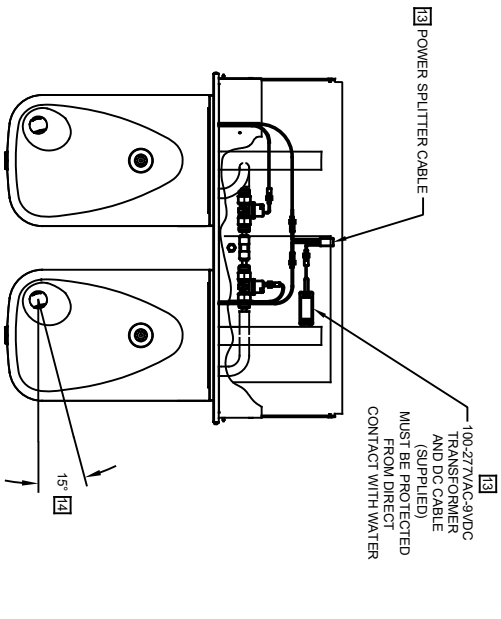


MODEL H1117.8HO2 SHOWN
 MODEL H1117.8HO ON SHEET 1
 (SEE SHEET 1 FOR APPLICABLE ROUGH-IN DIMENSIONS)

1459 KLEPPE LANE
 SPARKS, NEVADA, 89431
 (775) 359-4712 FAX (775) 359-7424
 E-MAIL: HAWS@HAWSCO.COM
 WEBSITE: WWW.HAWSCO.COM


ECN NO. REVISED PER BY:	MODEL(S)
5706 FV	H1117.8HO/H1117.8HO2
DATE: 06/28/21	
CHKD: DP	
APPROVED: FV	SCALE: NA
DATE: 06/28/21	DRAWING TYPE:
	INSTALLATION:
	SIZE: A
	SHEET: 2 OF 3
PART NUMBER	REVISION
0510001207	1

NOTES:

- [7] FIGURES 1 AND 2 ARE REVERSIBLE. CAN BE RIGHT OR LEFT SIDE HIGH.
- [8] USE SHADED HOLES TO MOUNT BOWLS AT INDICATED POSITIONS BASED ON COMBINATION SELECTED (FIGS. 1 THRU 3).
- 9. REFER TO SHEET 1 OF 3 NOTE 5. FOR INSTALLED FOUNTAIN DIMENSIONS.
- [10] INSERT 5/16"-18 PANEL NUT RETAINERS FROM OPPOSITE SIDE AT LOCATIONS SELECTED (SHOWN BY DARKENED HOLES). HOLE COMBINATION SHOWN (INSERT) IS FOR REF. ONLY.
- [11] TO CHANGE FOUNTAIN MTG. SCREW LOCATIONS: FIRST REMOVE SCREWS AND THEN SQUEEZE CLIPS ON NUT RETAINER TO POP OUT. SNAP INTO NEW POSITIONS AND RE-ASSEMBLE SCREWS.
- [12] ALIGN HOLES IN CHILLER SUPPORT TRAY WITH HOLES IN FRAME AND FASTEN WITH #10 SHEETMETAL SCREWS.
- [13] REFER TO 1RKHO.H & 2RKHO.H OPERATION AND MAINTENANCE INSTRUCTIONS FOR TRANSFORMER AND SENSOR SETUP.
- [14] MAXIMUM ADJUSTABLE RANGE IS 15" FROM PARALLEL TO BACK OF WALL.

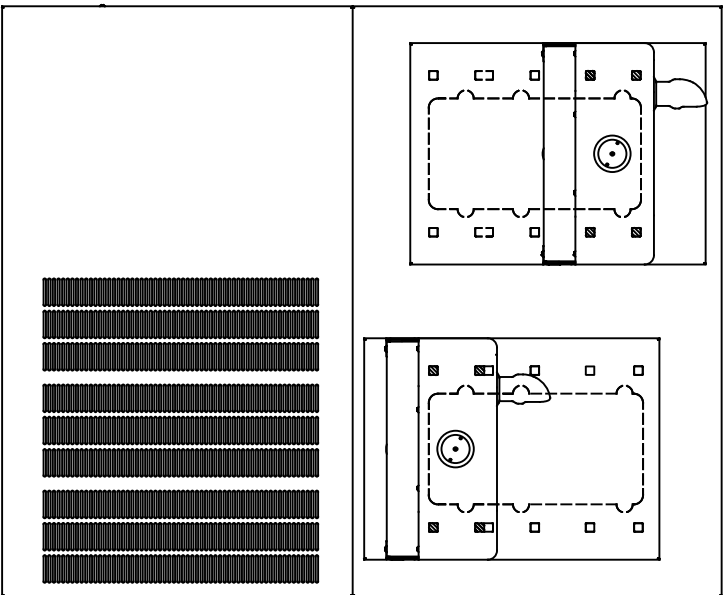

[7] FIGURE 1. ADULT STANDING/CHILD WHEELCHAIR

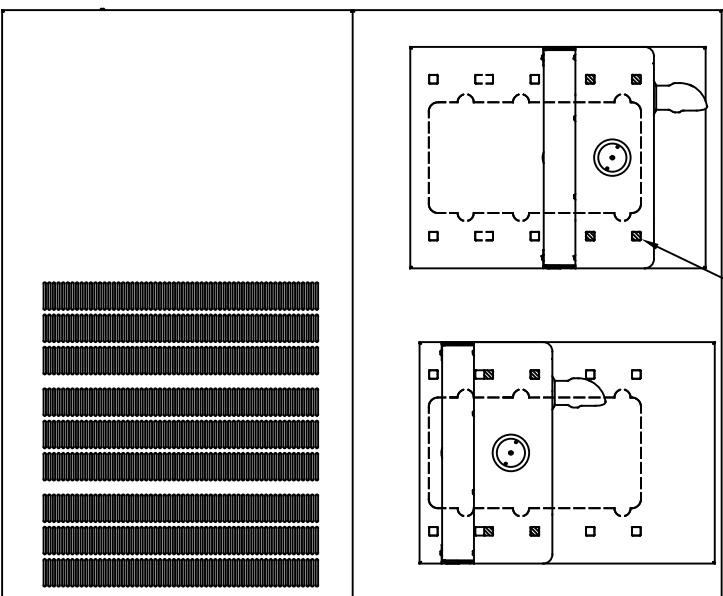

[7] FIGURE 2. ADULT STANDING/ADULT WHEELCHAIR


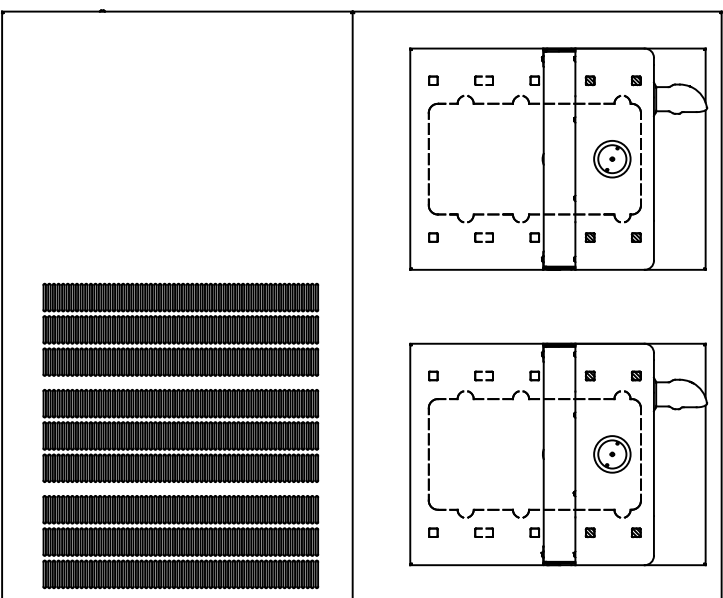


FIGURE 3. ADULT STANDING/ADULT STANDING

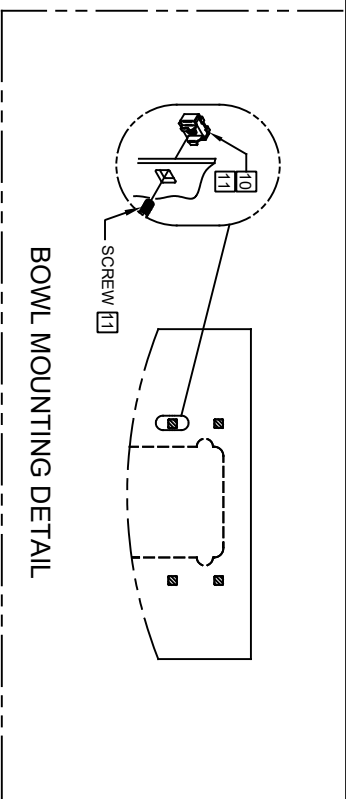

BOWL MOUNTING PATTERNS

ECN NO. REVISED PER BY:	MODEL(S)	1459 KLEPPE LANE	
5706	H1117.8HO/H1117.8HO2	SPARKS, NEVADA, 89431	
DATE:		(775) 359-4712 FAX (775) 359-7424	
06/28/21		E-MAIL: HAWS@HAWSCO.COM	
CHKD:		WEBSITE: WWW.HAWSCO.COM	
DP		PART NUMBER	
		0510001207	
REVISION:		1	
APPROVED:	SCALE: N/A	DRAWING TYPE:	INSTALLATION
FV	06/28/21		SIZE: A
			SHEET 3 OF 3