

FEATURES & BENEFITS

Copper is broadly recognized for its antimicrobial properties across many industries including hospitals. Copper and its alloys, such as brass, bronze and copper-nickel, are inherently antimicrobial. When cleaned regularly, frequently touched surfaces manufactured from uncoated copper alloy materials will continuously kill bacteria that cause infections.

OPTIONS


For more information, visit www.hawesco.com or call (888) 640-4297.



SPECIFICATIONS

The Haws model PBA6C flanged push button assembly can be used as an option to the chrome push button supplied with the valve 5874PBF, is made with 99.9% copper plating, and includes the push button, operator, round locknut, snap ring, and wave washer. This model is used on flush mounted (not recessed) front stainless steel drinking fountain models.

APPLICATIONS

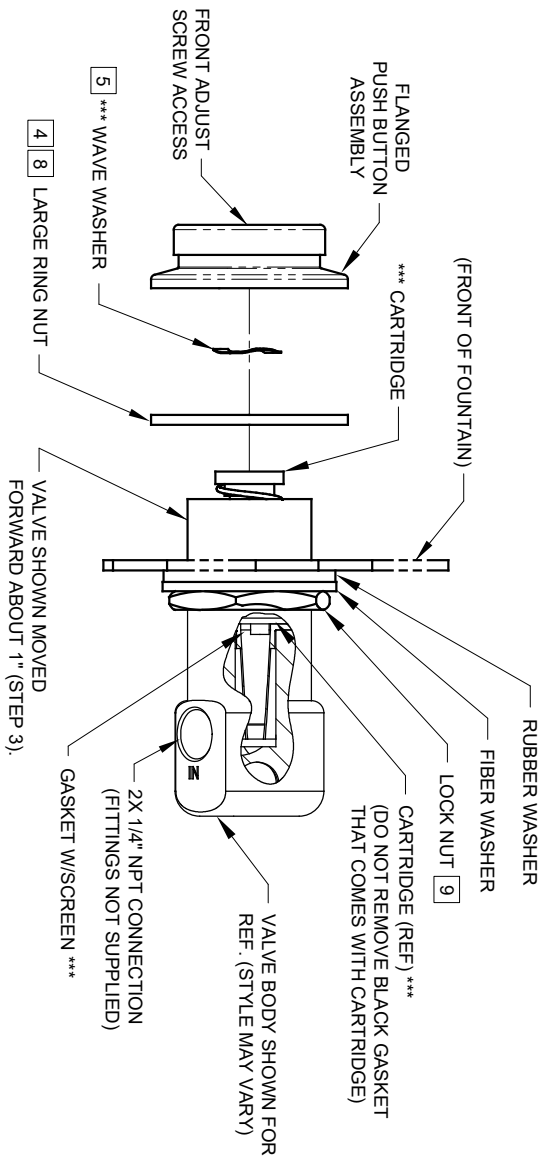

*** MODEL VRK5874 & VRK5874HF- VALVE REPAIR KITS INCLUDE THESE ITEMS
(SEE SHEET 3 OF 3 FOR REPLACEMENT INSTRUCTIONS)

INSTALLATION/REPLACEMENT INSTRUCTIONS FOR 5874PBF

1) FOLLOW INSTRUCTIONS CAREFULLY ON O&M MANUAL (PAGE 2 OF 7) WHEN REMOVING OLD VALVE. **NOTE: SEE PARTS BREAKDOWN (PAGE 4 OF 7) FOR ADDITIONAL NOTES.**

2) VERIFY THAT LOCK NUT, FIBER, AND RUBBER WASHERS ARE POSITIONED SLIGHTLY PAST MIDWAY OF THREADS ON NEW VALVE BODY.

3) INSERT VALVE INTO BRACKET FROM INSIDE AND PUSH FORWARD ABOUT 1".

4) THREAD LARGE RING NUT ONTO VALVE BODY, APPROXIMATELY 1" INTO VALVE.

5) PLACE WAVE WASHER INSIDE OF FLANGED PUSH BUTTON ASSEMBLY (**MUST ALWAYS BE IN PLACE**).

6) APPLY ONE (1) DOT OF LOCTITE 222MS. ON THE FEMALE THREADS OF BUTTON ASSEMBLY LEAVING THE FIRST AND LAST THREADS FREE. (FIGURE 1). **CAUTION: EXCESS LOCTITE CAN CAUSE THREADS TO LOCK VERY TIGHTLY, MAKING REPAIRS DIFFICULT.**


7) THREAD FLANGED PUSH BUTTON ASSEMBLY ON VALVE UNTIL WAVE WASHER MAKES SLIGHT CONTACT WITH STEM OF CARTRIDGE. **CAUTION: DO NOT HAND-TIGHTEN.

8) UNTHREAD RING NUT FORWARD UNTIL IT STOPS FLUSH WITH PUSH BUTTON ASSEMBLY.

9) PUSH VALVE BACK TOWARD THE INSIDE OF BRACKET AND TIGHTEN LOCKNUT (SEE ILLUSTRATION ABOVE).

10) TIGHTEN PUSH BUTTON ASSEMBLY USING UNIVERSAL SPANNER WRENCH PROVIDED WITH MODEL 5874PBF.

** OVERTIGHTENING WILL PRE-ACTUATE VALVE AND CAUSE WEEPAGE. WHILE NOT ENOUGH CONTACT BETWEEN WAVE WASHER AND STEM CAN CAUSE A LOW FLOW CONDITION.



ASSEMBLED 5874PBF
(FLUSH MOUNT APPLICATION ONLY)

SEE SHEET 2 OF 3 FOR 5874PBF RECESSED MOUNT INSTRUCTIONS.


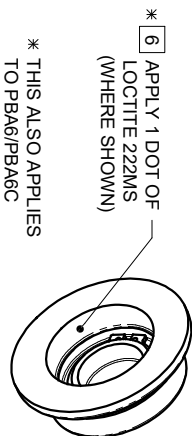


FIGURE 1

NOTE!
THIS VALVE IS PRESSURE COMPENSATING.
BE SURE TO REMOVE ANY EXISTING FLOW
CONTROL DEVICES. (MAY BE PRESENT IN
FITTING OR SPUD).

		HAWS®		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
ECN NO. REVISED PERBY: 4250 ECN 5945 FV		MODEL(S)		PART NUMBER	
DRAWN: DATE: 06/08/16 CHKD: J.C.		5874PBF/5874PBF/VRK5874/VRK5874HF/ PBA6/PBA6C/PBA7/PBA7C		0002077650.D	
APPROVED: FV 06/27/23		SCALE: NA DRAWING TYPE: INSTALLATION		REVISION	
				11	

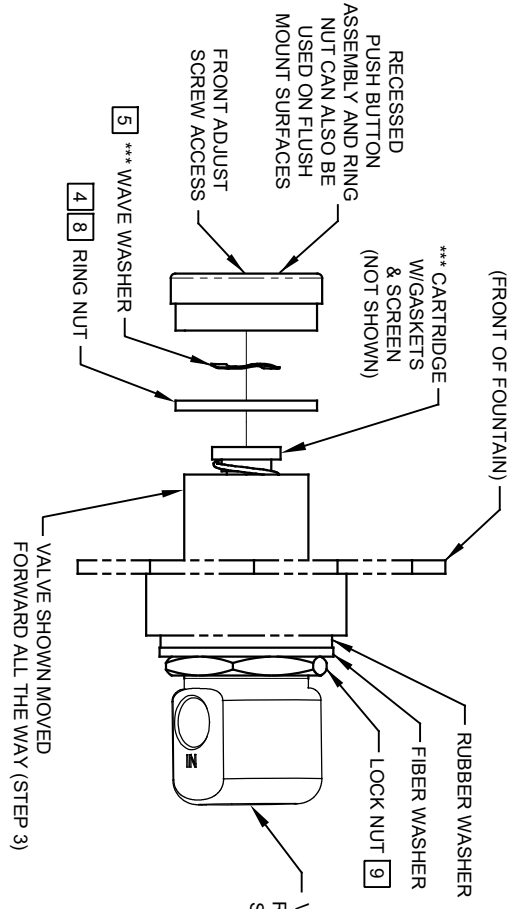

*** MODEL VRK5874 & VRK5874HF - VALVE REPAIR KITS INCLUDE THESE ITEMS
(SEE SHEET 3 OF 3 FOR REPLACEMENT INSTRUCTIONS)

INSTALLATION/REPLACEMENT INSTRUCTIONS FOR 5874PB

- 1) FOLLOW INSTRUCTIONS CAREFULLY ON O&M MANUAL (PAGE 2 OF 7) WHEN REMOVING OLD VALVE. **NOTE: SEE PARTS BREAKDOWN (PAGE 4 OF 7) FOR ADDITIONAL NOTES.**
- 2) VERIFY THAT LOCK NUT, FIBER WASHER, AND RUBBER WASHERS ARE POSITIONED TOWARD BOTTOM END OF THREADS ON NEW VALVE BODY.
- 3) INSERT VALVE INTO BRACKET FROM INSIDE, AND PUSH ALL THE WAY FORWARD (SEE ILLUSTRATION ABOVE).

- 4) THREAD RING NUT ONTO VALVE BODY, AS FAR IN AS POSSIBLE, TOWARD FRONT OF FOUNTAIN. **NOTE: IF REPLACING A 5871 OR 5872 SERIES VALVE, YOU MAY HAVE TO CONTACT HAWS TECHNICAL SUPPORT.**

- 5) PLACE WAVE WASHER INSIDE OF PUSH BUTTON ASSEMBLY (MUST ALWAYS BE IN PLACE).

- 6) APPLY ONE (1) DOT OF LOCTITE 222MS, ON THE FEMALE THREADS OF BUTTON ASSEMBLY LEAVING THE FIRST AND LAST THREADS FREE. (FIGURE 1). **CAUTION: EXCESS LOCTITE CAN CAUSE THREADS TO LOCK VERY TIGHTLY, MAKING REPAIRS DIFFICULT.**

- **7) THREAD PUSH BUTTON ASSEMBLY ON VALVE UNTIL WAVE WASHER MAKES SLIGHT CONTACT WITH STEM OF CARTRIDGE. **CAUTION: DO NOT HAND-TIGHTEN.**


- 8) UNTHREAD RING NUT FORWARD UNTIL IT STOPS FLUSH WITH PUSH BUTTON ASSEMBLY.

- 9) PUSH VALVE BACK TOWARD THE INSIDE OF BRACKET AND TIGHTEN LOCKNUT (SEE ILLUSTRATION ABOVE).

- 10) TIGHTEN PUSH BUTTON ASSEMBLY USING UNIVERSAL SPANNER WRENCH PROVIDED WITH MODEL 5874PB.

** OVERTIGHTENING WILL PRE-ACTUATE VALVE AND CAUSE WEEPAGE. WHILE NOT ENOUGH CONTACT BETWEEN WAVE WASHER AND STEM CAN CAUSE A LOW FLOW CONDITION.

ASSEMBLED 5874PB
(RECESSED MOUNT APPLICATION SHOWN)
SEE SHEET 1 OF 3 FOR FLUSH MOUNT INSTRUCTIONS.



* [6] APPLY 1 DOT OF
LOCTITE 222MS
(WHERE SHOWN)

* THIS ALSO APPLIES
TO PBA7/PBA7C

FIGURE 1



NOTE!
THIS VALVE IS PRESSURE COMPENSATING.
BE SURE TO REMOVE ANY EXISTING FLOW
CONTROL DEVICES. (MAY BE PRESENT IN
FITTING OR SPUD).

**Haws®**

1456 KLEPPE LANE
SPARKS, NEVADA, 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PER BY:		MODEL(S)	
4250	ECN 5945 FV	5874PB/5874PBF/VRK5874/VRK5874HF/ PBA6/PBA6C/PBA7/PBA7C	
DRAWN: LM	DATE: 06/09/16	CHKD: JC	
APPROVED: FV	DATE: 09/27/23	SCALE: NA	DRAWING TYPE: INSTALLATION
PART NUMBER		SIZE: A	SHEET 2 OF 3
0002077650.D			
REVISION			
11			

FIGURE 1

1) FOLLOW INSTRUCTIONS CAREFULLY ON O&M MANUAL (PAGE 2 OF 7) WHEN REMOVING VALVE. NOTE: SEE PARTS BREAKDOWN (PAGE 4 OF 7) FOR ADDITIONAL NOTES.

- 4 WHEN INSERTING NEW CARTRIDGE ASSEMBLY WITH GASKET SCREEN, FOLLOW THESE IMPORTANT STEPS:**

- CONFIRM CARTRIDGE HAS BOTTOMED OUT PROPERLY BEFORE INSTALLING RETAINING NUT.
- THREAD RETAINING NUT UNTIL IT CONTACTS THE CARTRIDGE, THEN TIGHTEN 1-1/4 TURN FARTHER, CHECK FOR LEAKS.

5 PLACE WAVE WASHER (EXISTING OR NEW) INSIDE OF PUSH BUTTON ASSEMBLY (MUST ALWAYS BE IN PLACE)

- ** 7) THREAD EXISTING PUSH BUTTON ASSEMBLY ON VALVE UNTIL WAVE WASHER MAKES SLIGHT CONTACT WITH STEM OF CARTRIDGE. CAUTION: DO NOT HAND-TIGHTEN.**

- ***
OVERTIGHTENING WILL PRE-ACTUATE VALVE AND CAUSE WEEPAGE. WHILE NOT ENOUGH
CONTACT BETWEEN WAVE WASHER AND STEM CAN CAUSE A LOW FLOW CONDITION.



THIS VALVE IS PRESSURE COMPENSATING BE SURE TO REMOVE ANY EXISTING FLOW CONTROL DEVICES. (MAY BE PRESENT IN FITTING OR SPUD).

©2023 Haws Corporation - All Rights Reserved. HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.