



INSTALLATION, OPERATION & MAINTENANCE INSTRUCTIONS

1455 Kleppe Lane ♦ Sparks, NV 89431-6467 ♦ (775) 359-4712 ♦ Fax (775) 359-7424
E-mail: haws@hawsco.com ♦ website: www.hawsco.com

No. 0510000703 (5)

MODEL 3670 DOG BOWL, STAINLESS STEEL

NOTE TO INSTALLER: Please leave this information with the Maintenance Department.

LIMITED WARRANTY

HAWS warrants that all of its products are guaranteed against defective material or poor workmanship for a period of **one year from the date of shipment**. The foregoing notwithstanding, *HAWS* warrants certain specific products or components thereof for an adjusted period. A list of these excepted products and components and a description of their respective warranty terms may be found here: www.hawsco.com/warranty. *HAWS'* liability under this warranty shall be discharged by furnishing without charge F.O.B. *HAWS* factory any goods, or part thereof, which shall appear to the Company upon inspection to be of defective material or not of first-class workmanship, provided that a claim is made in writing to Company within a reasonable period after receipt of the product. Where claims for defects are made, the defective part or parts shall be delivered to the Company, prepaid, for inspection. *HAWS* shall not be liable for the cost of repairs, alterations or replacements, or the labor required to implement them, or for any expense connected therewith made by the owner or owner's agents, except upon written authority from *HAWS*. *HAWS* shall not be liable for any damages caused by defective materials or poor workmanship, except for replacements, as provided above. Buyer agrees that *HAWS* has made no other warranties either express or implied in addition to those above stated, except that of title with respect to any of the products or equipment sold hereunder and that *HAWS* shall not be liable for general, special, incidental, or consequential damages claimed to arise under the contract of sale.

Equipment manufactured by *HAWS* is warranted to function if installation and maintenance instructions provided are adhered to. The units also must be used for the purpose for which they were intended. Any *HAWS* emergency equipment is intended to supplement first-aid treatment. Due to widely varying conditions, *HAWS* cannot guarantee that the use of this emergency equipment will prevent serious injury or the aggravation of existing or prior injuries.

EXCEPT AS EXPRESSLY STATED HEREIN, HAWS HEREBY DISCLAIMS ALL WARRANTIES, WHETHER EXPRESS OR IMPLIED, ARISING BY LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY MAY NOT BE MODIFIED OR EXTENDED WITHOUT THE WRITTEN CONSENT OF HAWS. REMEDIES AND REPLACEMENTS STATED HEREIN ARE EXCLUSIVE. IN NO EVENT SHALL HAWS BE LIABLE FOR ANY SPECIAL, PUNITIVE, CONSEQUENTIAL OR INCIDENTAL DAMAGES TO ANY PERSON INCLUDING BUT NOT LIMITED TO DAMAGES FOR LOSS OF USE OR PROFITS, SUBSTITUTE PRODUCTS OR COSTS, PROPERTY DAMAGE. OR OTHER MONETARY LOSS.

SHOULD YOU EXPERIENCE DIFFICULTY WITH THE INSTALLATION OF THIS MODEL PLEASE CALL:

TECHNICAL SUPPORT: 1-800-766-5612
FOR CUSTOMER SERVICE: 1-888-640-4297

RECOMMENDED TOOLS:

- Measuring Tape
- PVC Pipe Cutter
- PVC Solvent Weld Glue
- PVC Primer
- Plastic Tubing Cutter
- Level
- Adjustable Plier
- 5/32" Pinned Hex Key Wrench (supplied)
- 9/16" Box/Open Combination Wrench, 8" Max Length
- 9/16" Deep Socket
- 3/8" Socket Wrench/Ratchet, 8" Max Length

LOCATION OF UNIT: The Model 3670 Dog Bowl Accessory is designed to be used with Haws Model 36XX Outdoor Bottle Filler/Fountain pedestal. The Dog Bowl can be mounted in any lower side pedestal opening (except 36XXF series pedestals which have 6477 water filter mounted on left-hand side of pedestal). When installing this unit, local, state and federal (including ADA) codes must be adhered to. CAUTION!: This Dog Bowl Accessory is not freeze resistant! To prevent damage to the unit and a potential flooding hazard, do not install in locations that have the potential to freeze.

SUPPLY LINE: The minimum recommended line size is 1/2"IPS with 30-90 psi (2-6 ATM) flowing pressure. Where sediment or mineral content is a problem, an inlet filter is recommended.

PLUMBING CONNECTIONS: Water supply inlet connection is a 3/8"O.D. compression fitting. Waste outlet is 1-1/2" O.D. tube.

MAINTENANCE: Periodically clean the pushbutton valve strainer. Refer to 5874 Series Valve Operation and Maintenance Manual for more information.

INSTALLATION PROCEDURE

GENERAL NOTES:

1. For all compression fitting connections, only connect NSF-61 copper or plastic 3/8" outside diameter tubing. The following assembly instructions must be followed to ensure a watertight connection:
 - a. Cut tubing square and clean. Deburr if necessary.
 - b. Place compression nut and ferrule over end of tubing.
 - c. For plastic tubing (must be 1/4" inside diameter), insert supplied tubing insert into end of tubing.
 - d. Push tube into the fitting until it bottoms out.
 - e. Thread nut onto fitting and tighten snugly with 5/8" wrenches.

Tube Sizes	O.D. Tolerance	Insertion Depth
3/8"	±.005"	3/4"

TROUBLESHOOTING	
PROBLEM	REPAIR CHECKLIST
1. Insufficient bubbler flow.	1a. Check that inlet screwdriver stop valve is wide open. b. Verify minimum 30 psi flowing supply pressure. c. Clean inlet strainer. See 5874 Series Valve Manual. d. Adjust valve to increase flow. Use front adjust screw or see 5874 Series Valve Manual.



For more information about Haws products, see our website: www.hawSCO.com

ITEM	PART NUMBER	DESCRIPTION
1	5703M	BUBBLER HEAD
2	5874PB	PUSH BUTTON VALVE
3	VRK5874	VALVE REPAIR KIT
4	PBA7	PUSH BUTTON

NOTES:

- 1 5874PB, ITEM 2, INCLUDES VRK5874 CARTRIDGE ASSEMBLY, ITEM 3, AND PBA7 PUSH BUTTON, ITEM 4.
- 2 ENSURE TUBE IS DISCONNECTED FROM VALVE BODY PRIOR TO REMOVAL. APPLY A DROP OF LOCTITE 222MS ON NOZZLE THREADS PRIOR TO REASSEMBLING BACK ONTO BUBBLER HEAD. REATTACH TUBE TO VALVE BODY

2 REMOVE INSERT WITH 5/16" HEX SOCKET (NOT SUPPLIED)

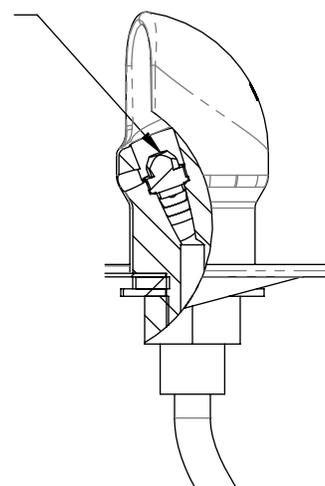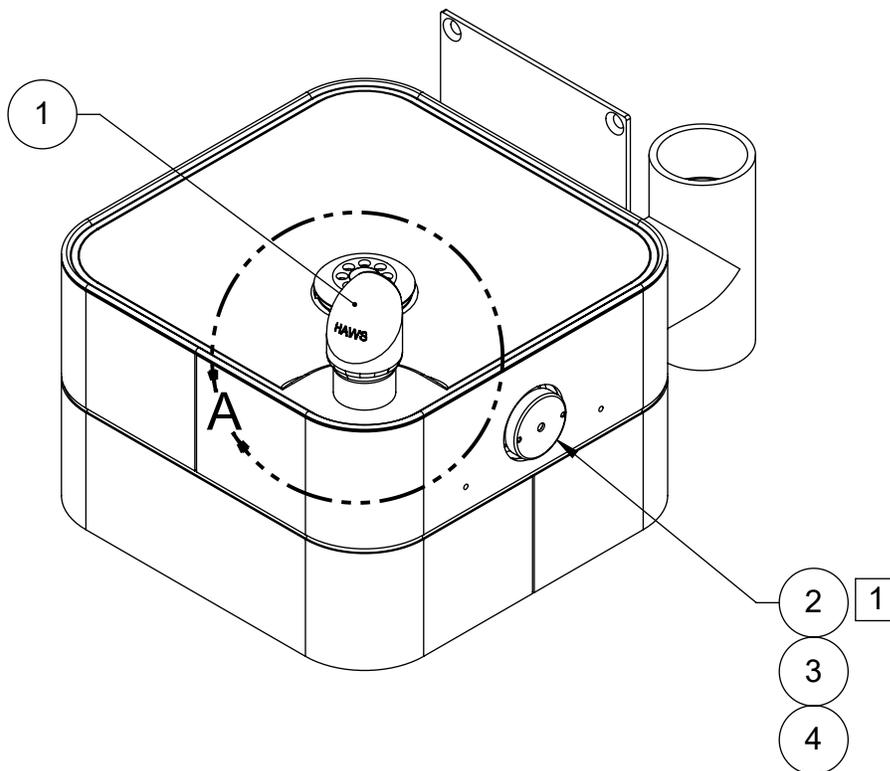

DETAIL A
SCALE 1:2
ROTATED INTO VIEW




PARTS BREAKDOWN

 Haws Since 1906			1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM		
ECN: 5226	REV. ECN: 5925	BY: FV	MODEL(S)	PART NUMBER	0510000703
DRAWN: MH	DATE: 05/16/17	CHKD: JC	MODEL 3670 PET BOWL ACCESSORY	REVISION	5
APPROVED: FV	DATE: 05/31/23	SCALE: 1:4	DRAWING TYPE: PARTS BREAKDOWN	SIZE: A	SHEET 1 OF 1

WHEN ORDERING PARTS, PLEASE SPECIFY PART NUMBER

NOTES

1. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO. FOR INSTALLATION HEIGHTS OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY. INSTALL A TRAP IN THE WASTE LINE AND A SCREWDRIVER STOP IN THE SUPPLY LINE IF REQUIRED.
2. IF NECESSARY FOR INSTALLATION, BOWL CAN BE REMOVED BY REMOVING THE SCREW IN THE CENTER OF THE BOWL.

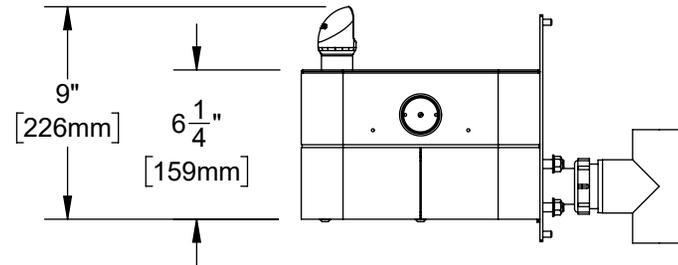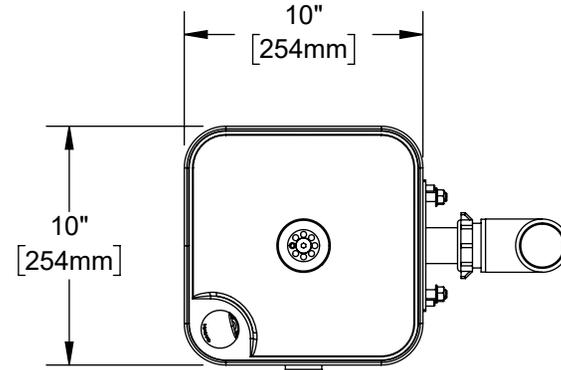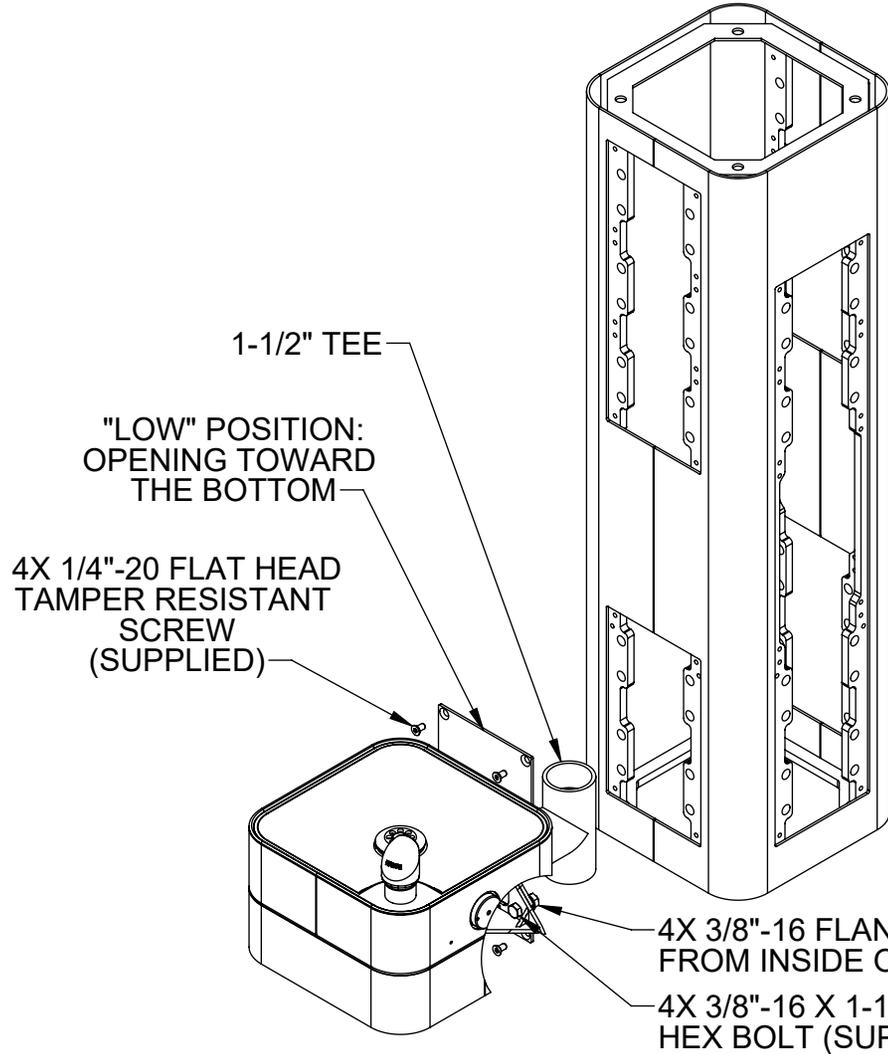


NOTE: STANDARD CONFIGURATION FOR MODEL 3670 ON A PEDESTAL IS SHOWN. IT IS RECOMMENDED THAT THE ASSEMBLY IS PLACED AT THE LOWEST OPENING ON THE PEDESTAL. THE MOUNTING PLATE CAN BE ROTATED SO THE DOG BOWL CAN BE IN A "HIGH" OR "LOW" POSITION. IT IS RECOMMENDED TO USE THE "LOW" POSITION AS SHOWN.

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		ECN: 5226 DRAWN: MH APPROVED: FV	REV. ECN: 5925 DATE: 05/16/17 DATE: 05/31/23
PART NUMBER 0510000703.D			REVISION 5
SCALE: 1:8		DRAWING TYPE: INSTALLATION	SIZE: A
SHEET 1 OF 2			

NOTES:

3. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO.
4. THIS PET ACCESSORY INCLUDES A SLOW DRAIN DISC UNDER THE STRAINER TO FACILITATE BOWL FILLING AND IMPROVE EASE OF DRINKING FOR PETS.
5. MANUALLY CENTER TRIM RING BETWEEN BOWL AND ARM BEFORE TIGHTENING BOWL TO ARM MOUNTING BOLTS. TRIM RING SHOULD BE SLIGHTLY RECESSED ON ALL SIDES.

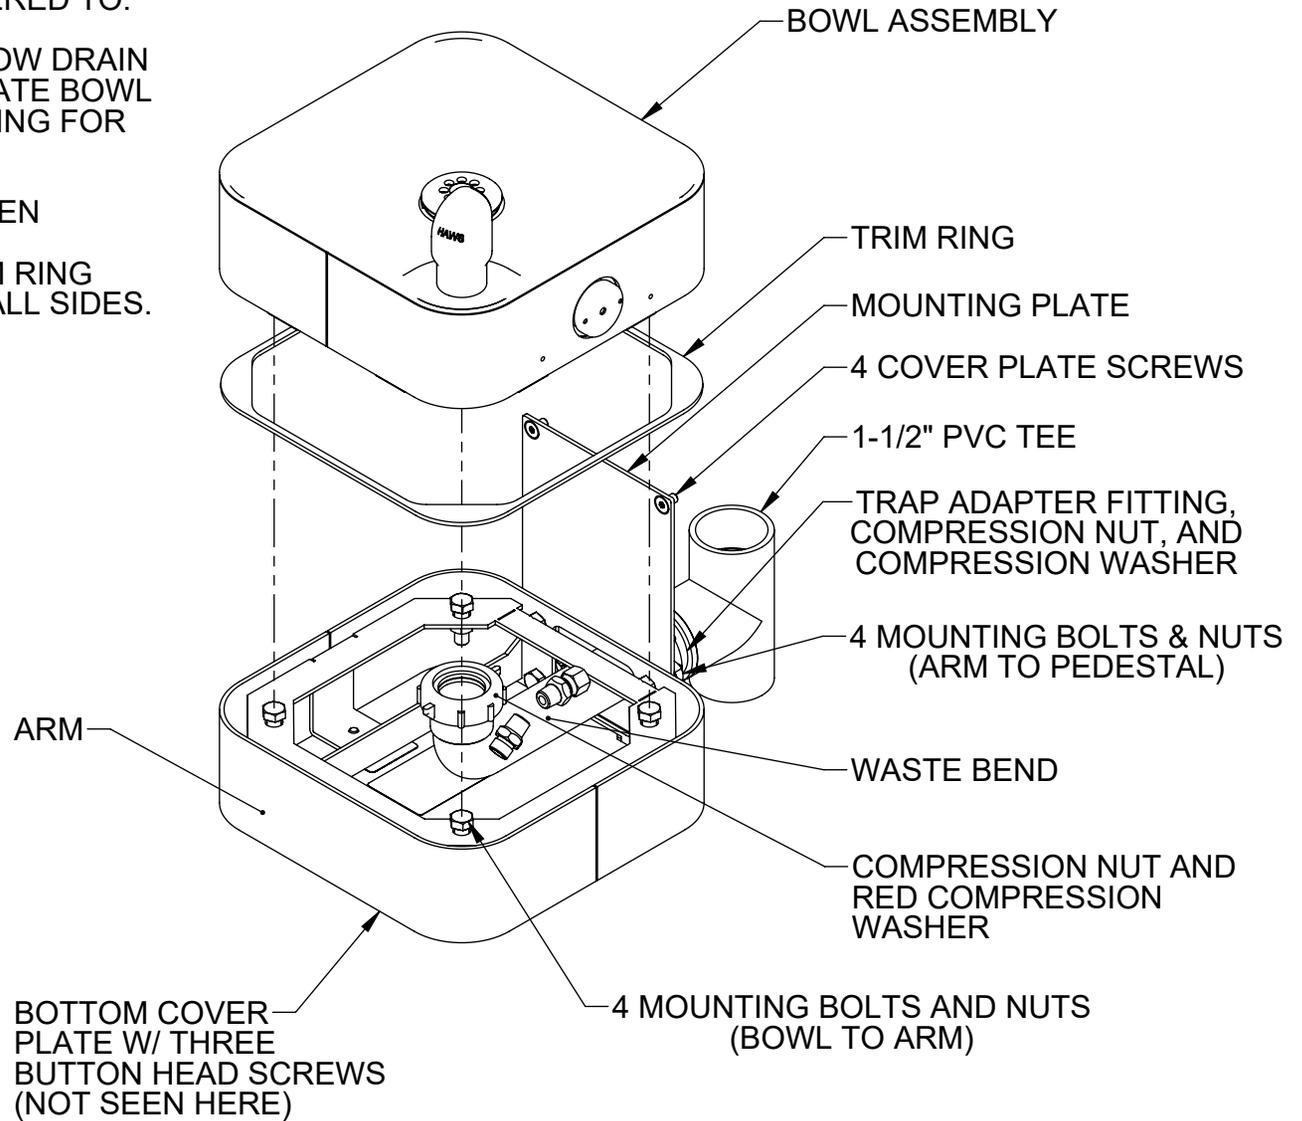

 Haws Since 1906		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSO.COM WEBSITE: WWW.HAWSO.COM	
		ECN: 5226 REV. ECN: 5925 BY: FV DATE: 05/16/17 CHKD: JC APPROVED: FV DATE: 05/31/23	MODEL(S) MODEL 3670 PET BOWL ACCESSORY
SCALE: 1:8		DRAWING TYPE: INSTALLATION	
SIZE: A		SHEET 2 OF 2	